

---

# **developer.skatelescope.org**

## **Documentation**

**SKA Organization**

**Aug 03, 2023**



# BACKGROUND

<b>1</b>	<b>Overview</b>	<b>1</b>
1.1	System Context . . . . .	1
<b>2</b>	<b>LMC to MCS</b>	<b>3</b>
2.1	CbfController Tango Commands . . . . .	5
2.2	CbfSubarray Tango Commands . . . . .	7
<b>3</b>	<b>MCS to HPS</b>	<b>9</b>
3.1	MCS and HPS Master DS . . . . .	9
3.2	MCS On Command . . . . .	10
3.3	Configure Scan Command Sequence . . . . .	11
<b>4</b>	<b>Getting Started</b>	<b>15</b>
4.1	Developer Setup . . . . .	15
4.2	Git Repository . . . . .	15
4.3	Running the Mid CBF MCS . . . . .	15
4.4	Useful Minikube Commands . . . . .	17
4.5	Taranta . . . . .	18
4.6	Generating Documentation . . . . .	18
4.7	Releasing . . . . .	18
4.8	Development resources . . . . .	19
4.9	License . . . . .	20
<b>5</b>	<b>Code Element Design Notes</b>	<b>21</b>
5.1	Component Managers . . . . .	21
5.2	Cbf Controller . . . . .	21
5.3	Cbf Subarray . . . . .	21
5.4	Frequency Slice Processor (FSP) . . . . .	23
5.5	Mid.Cbf VCC Device Server (VccMulti) . . . . .	23
5.6	Talon LRU . . . . .	23
5.7	Power Switch . . . . .	24
5.8	Talon DX Log Consumer . . . . .	25
<b>6</b>	<b>Code</b>	<b>27</b>
6.1	CbfComponentManager . . . . .	27
6.2	CbfController . . . . .	30
6.3	CbfSubarray . . . . .	34
6.4	Fsp . . . . .	40
6.5	Vcc . . . . .	70
6.6	PowerSwitch . . . . .	81
6.7	TalonLRU . . . . .	87

6.8	TalonDxLogConsumer . . . . .	90
<b>7</b>	<b>Indices and tables</b>	<b>91</b>
	<b>Python Module Index</b>	<b>93</b>
	<b>Index</b>	<b>95</b>

## OVERVIEW

The Mid.CBF Master Control Software (MCS) provides a high-level interface to the Telescope Monitoring and Control (TMC) and CSP\_Mid Local Monitoring and Control (LMC), and translates the high-level commands into the configuration and control of individual Talon-DX boards.

### 1.1 System Context

The following diagram shows MCS as it fits into the rest of the CSP Mid system.


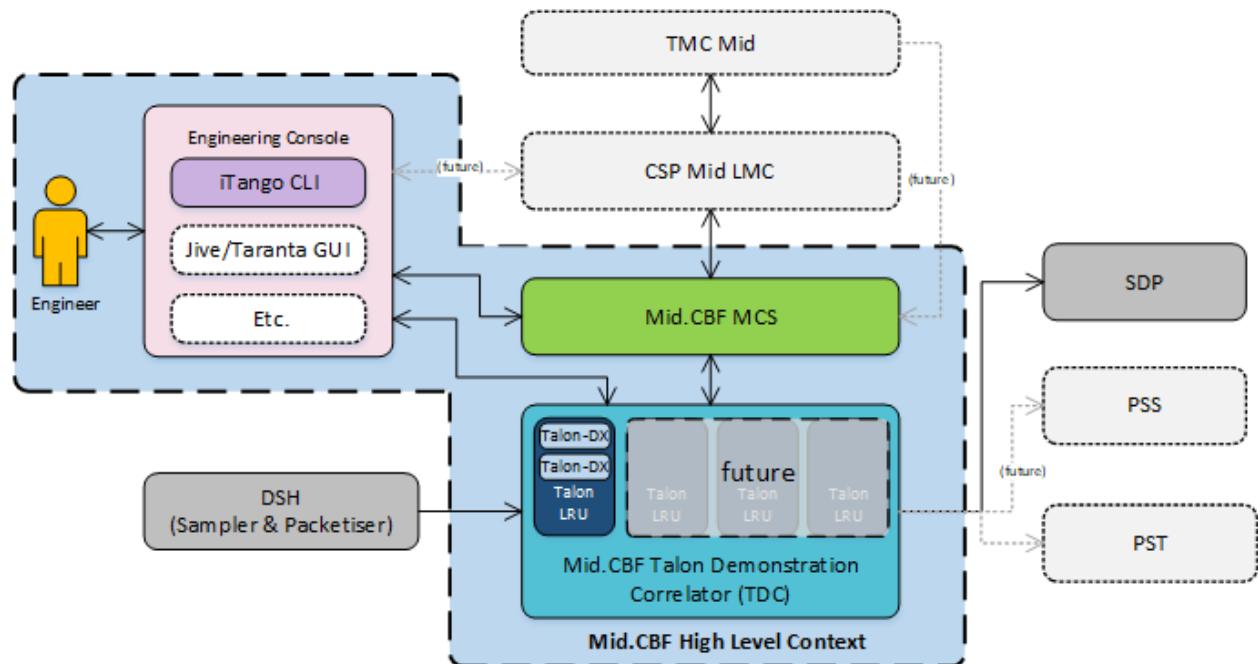


Fig. 1: MCS System Context

MCS interacts with TMC and CSP\_Mid LMC and controls the applications and low-level device servers that run on the hard processor system (HPS) of the Talon-DX boards. The diagram below shows these interactions. TMC and CSP\_Mid LMC interact with the CBF Controller and CBF Subarray. The diagram also shows the Engineering Console and pytest-BDD elements which are used to test the interfaces between MCS and TMC/CSP\_Mid LMC during development.

In MCS there is one VCC device and one FSP device for each VCC/FSP in the system. These devices communicate directly with the top level HPS application for the reconfiguration of the Talon-DX functionality (VCC Controller / HPS FSP Controller)

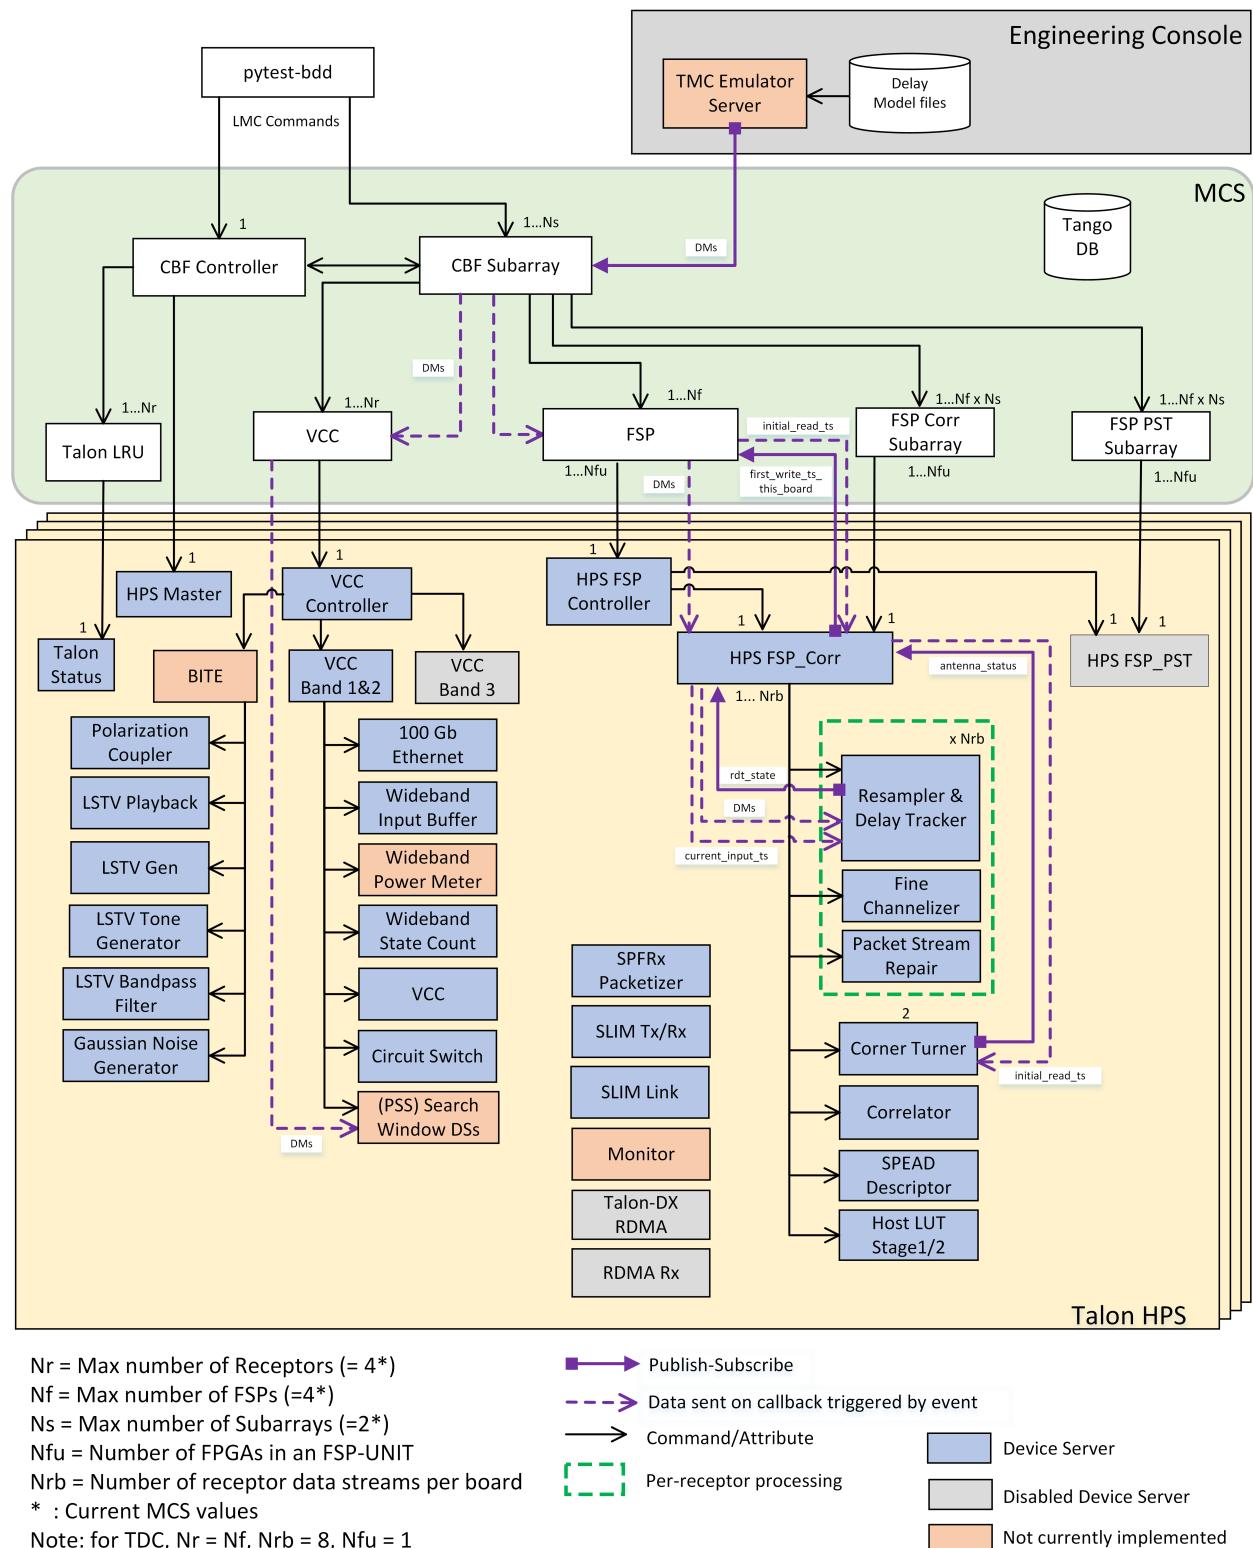

---

**CHAPTER  
TWO**

---


## **LMC TO MCS**

MCS provides commands and attributes to turn MCS on and off (through the CBF Controller) as well as commands needed to configure and execute scans through the subarrays. (CBF Subarray)

The sequence diagram below shows the interactions between LMC and MCS to assign receptors to a subarray, configure a scan, and run a scan. It shows configuration of one Mid.CBF subarray followed by running a scan on that subarray. It ends with no receptors assigned to the subarray. The calls to write the frequency offset K and frequency offset delta F values only need to be written when there are updates to the values. They must be written to the CBF Controller before the scan configuration.

For full details of MCS Controller see [\*CbfController\*](#).

For full details of MCS Subarray see [\*CbfSubarray\*](#).

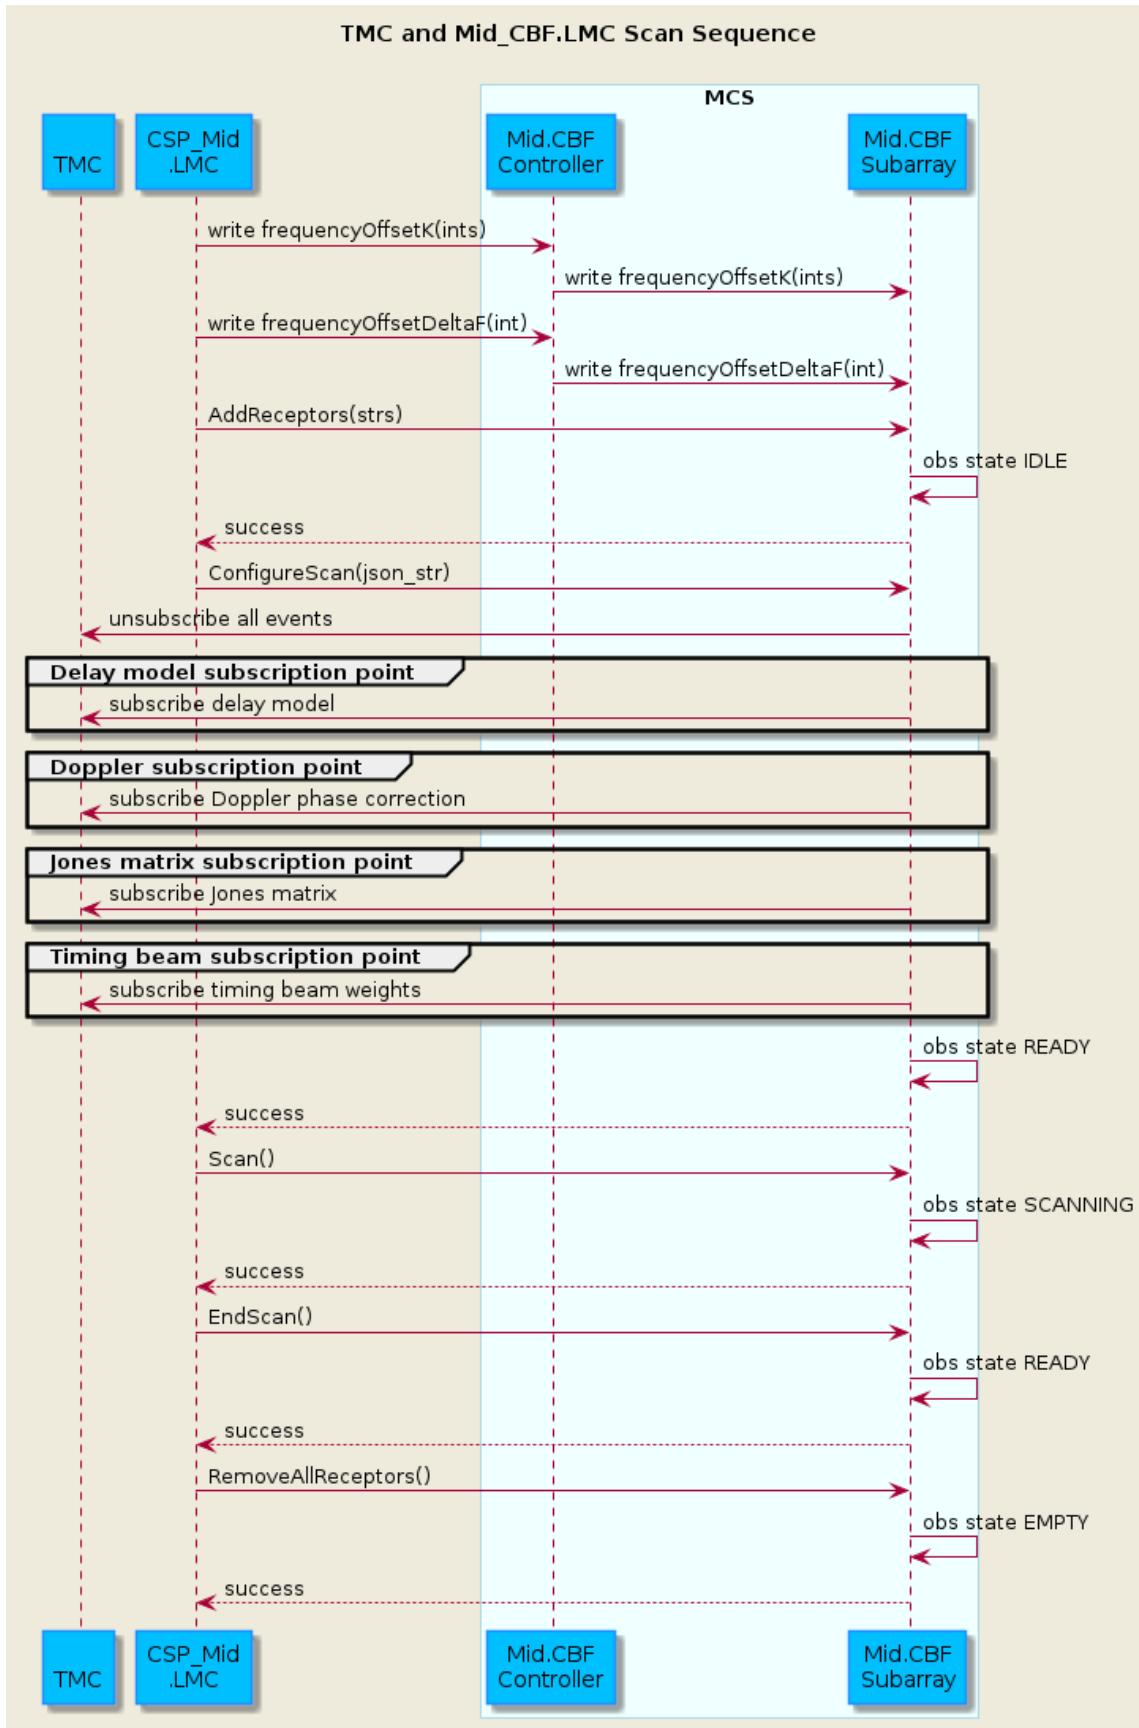

## 2.1 CbfController Tango Commands

Command	Parameters	Return type	Action
Off	None	(ResultCode, str)	Turn off the controller and subordinate devices
Standby	None	(ResultCode, str)	Put in low power mode
On	None	(ResultCode, str)	Turn on the controller and subordinate devices



## 2.2 CbfSubarray Tango Commands

Command	Parameters	Return type	Action
Abort	None	(resultCode, str)	Abort subarray configuration or operation
AddReceptors	List[str]	(resultCode, str)	Assign receptors to this subarray Turn subarray to ObsState = IDLE if no receptor was previously assigned
ConfigureScan	JSON str*	(resultCode, str)	Change state to configuring Configure attributes from input JSON Subscribe events Configure VCC, VCC subarray, FSP, FSP Subarray. Publish output links.
EndScan	None	(resultCode, str)	End the scan
ObsReset	None	(resultCode, str)	Reset subarray scan configuration
Off	None	(resultCode, str)	Set subarry power mode to off. Commands FSP<function mode> Subarrays to turn off
On	None	(resultCode, str)	Set subarry power mode to on. Commands FSP<function mode> Subarrays to turn on
RemoveAllReceptors	None	(resultCode, str)	Remove all receptors Turns Subarray off if no receptors are assigned
RemoveReceptors	List[str]	(resultCode, str)	Remove receptors in input
<b>2.2. CbfSubarray Tango Commands</b>			list Turns Subarray to ObsState=EMPTY if no receptors assigned

- Schema for JSON string defined in the Telescope Model - Mid.CBF schemas

## MCS TO HPS

The interface from the MCS to the HPS is largely in the form of communication between Tango devices running on either side.

The interface also currently consists of low-level SSH calls from the MCS to the Talon-DX boards, which are used to copy FPGA bitstreams and Tango device server binaries to the boards and start the HPS Master process. This functionality may be moved in the future, but for now it is implemented in the *TalonDxComponentManager Class*, which is instantiated by the *CbfController*.

### 3.1 MCS and HPS Master DS

The interface between the MCS and the HPS Master device server is primarily made up of the `configure` command sent from the MCS to the HPS master, which programs the FPGA and spawns the remaining HPS device servers. Before this command can be run, it is expected that the MCS has already copied the necessary bitstreams and binaries to the board and the HPS master has obviously been started. This is all handled automatically as part of the *MCS On Command*.

The `configure` command has one argument, which is a JSON-formatted string. An example of its contents can be seen below.

```
{  
    "description": "Configures Talon DX to run VCC firmware and devices.",  
    "target": "talon1",  
    "ip_address": "169.254.100.1",  
    "ds_hps_master_fqdn": "talondx-001/hpsmaster/hps-1",  
    "fpga_path": "/lib/firmware",  
    "fpga_dtb_name": "vcc3_2ch4.dtb",  
    "fpga_rbf_name": "vcc3_2ch4.core.rbf",  
    "fpga_label": "base",  
    "ds_path": "/lib/firmware/hps_software/vcc_test",  
    "server_instance": "talon1_test",  
    "devices": [  
        "dscircuitswitch",  
        "dsdct",  
        "dsfinechannelizer",  
        "dstalondxrdma",  
        "dsvcc"  
    ]  
}
```

## 3.2 MCS On Command

The following diagram shows the CbfController On command sequence and how it integrates with other components in the Mid.CBF system. The steps are outlined in detail in the [Engineering Console](#).

From a MCS perspective, the On command sequence consists of the following steps:

- Arrows 4-7: Power on the Talon-DX boards
- Arrow 9: Attempt to connect to each board over SSH (see [TalonDxComponentManager Class](#))
- Arrows 8-9: Copy the relevant binaries and bitstreams to each board
- Arrow 10: Start up the HPS Master on each board
- Arrow 12: Send the configure to each HPS Master device server


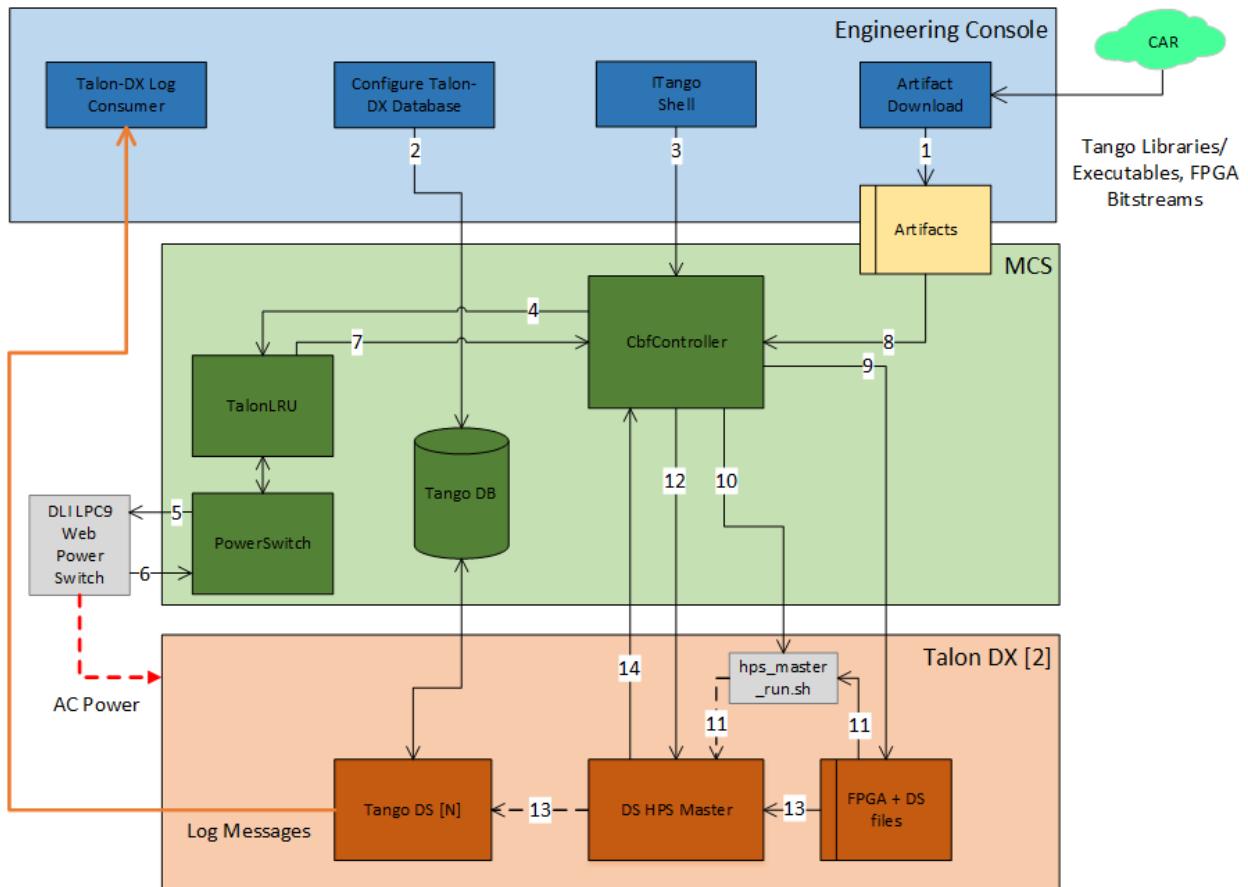



Fig. 1: MCS On Command Sequence

### 3.3 Configure Scan Command Sequence


The sequence diagram below shows the main sequence of calls in MCS to configure a correlation scan. Return calls are not shown.

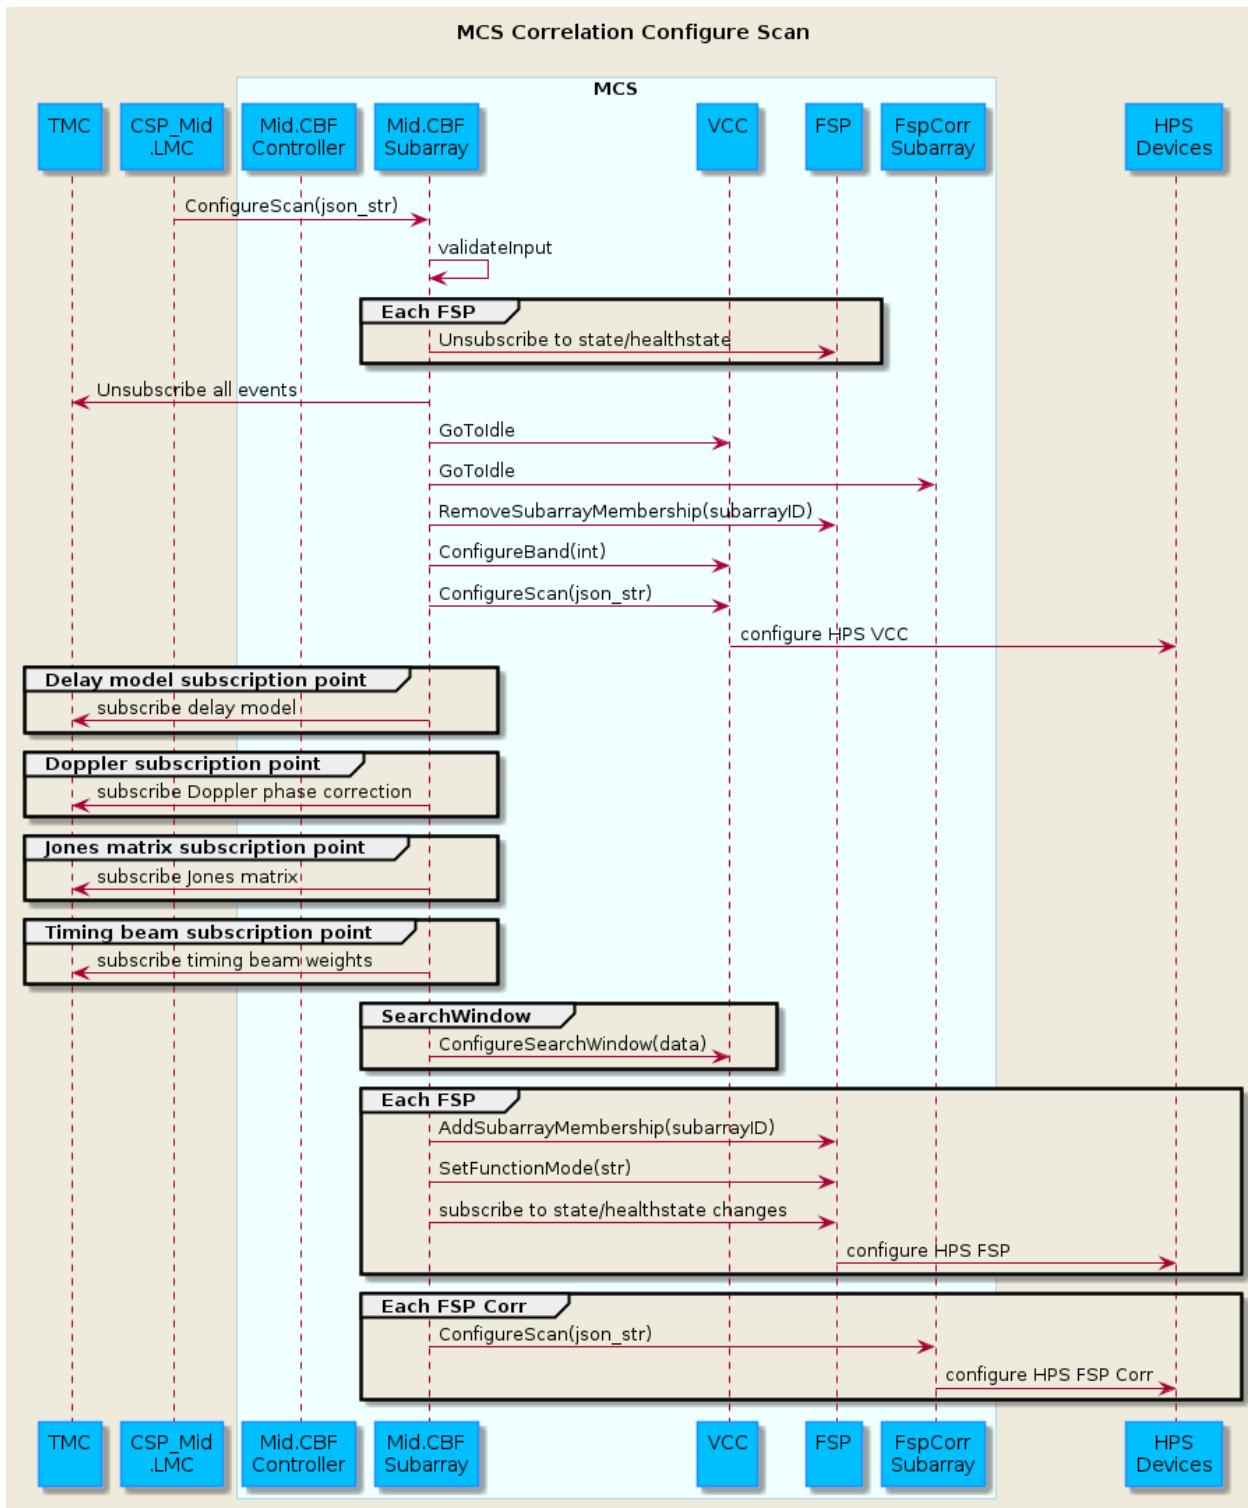

The sequence diagram below shows additional detail for configuration of the VCC for a correlation scan.

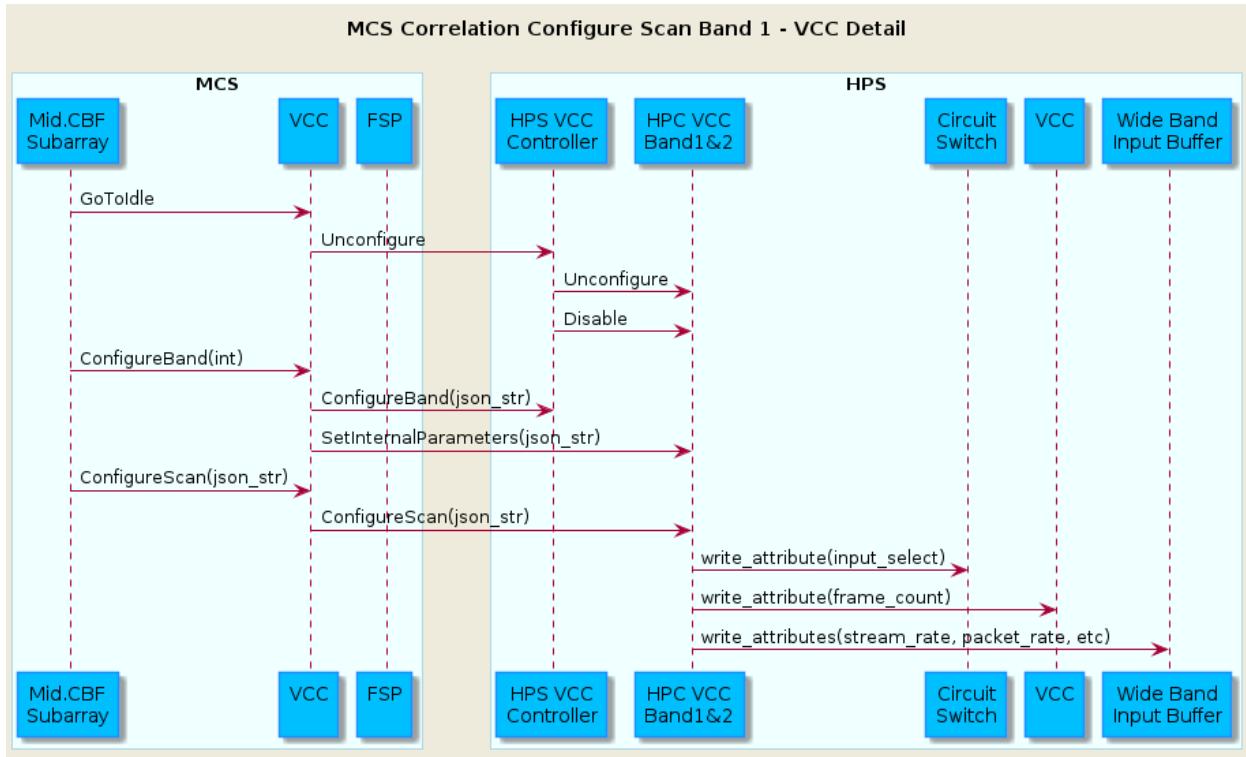

The sequence diagram below shows details of calls to configure a FSP for a correlation scan.

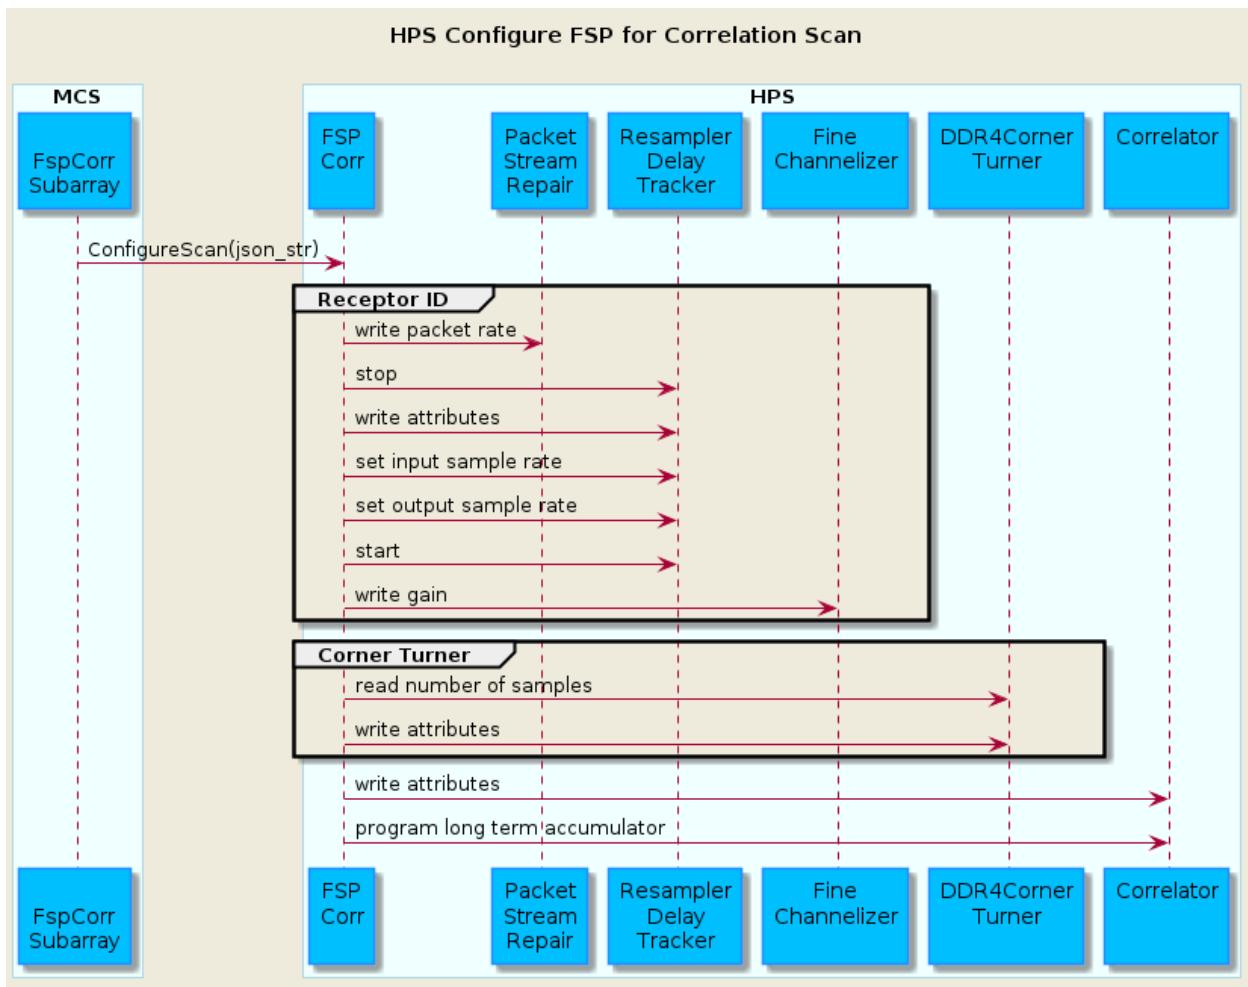



## GETTING STARTED

### 4.1 Developer Setup

This section follows the instructions on the SKA developer's portal:

- [Dev Environment Setup](#)
- [Dev FAQs](#)

### 4.2 Git Repository

The MCS Git Repository is available at the following page: <https://gitlab.com/ska-telescope/ska-mid-cbf-mcs>

The README on the repository will guide users through cloning and initializing the repository.

### 4.3 Running the Mid CBF MCS

The ska-mid-cbf-mcs Tango device servers are started and run via Kubernetes.

Make sure Kubernetes/minikube and Helm have been installed (and verified) as described in the ‘Set up Kubernetes’ section.

*Note:* You may need to change permission to the .minikube and .kube files in your home directory:

```
sudo chown -R <user_name>:<user_name> ~/.minikube/  
sudo chown -R <user_name>:<user_name> ~/.kube/
```

#### 4.3.1 1. Make sure minikube is up and running

The following commands use the default minikube profile. If you are running the MCS on the Dell server you will need to set up your own minikube profile. A new minikube profile is needed for a new cluster, so creating minikube profiles ensures two users on the Dell server do not work on the same cluster at the same time. To view the modifications needed to run the following commands on a new minikube profile see Minikube Profiles

```
minikube start    # start minikube (local kubernetes node)  
minikube status   # check current status of minikube
```

The `minikube status` output should be:

```
minikube
type: Control Plane
host: Running
kubelet: Running
apiserver: Running
kubeconfig: Configured
```

If restarting a stopped minikube; from local ska-cicd-deploy-minikube repository run make minikube-metallb-config to reapply metallb configMap to determine pod LoadBalancer service external IP addresses.

#### 4.3.2 2. From the root of the project, build the application image.

```
cd ska-mid-cbf-mcs
eval $(minikube docker-env)    # to use the minikube's docker environment
make oci-image-build           # if building from local source and not artefact repository
```

make oci-image-build is required only if a local image needs to be built, for example every time the SW has been updated. For development, in order to get local changes to build, run eval \$(minikube docker-env) before make build

*Note:* To check if you are within the minikube's docker environment, use the minikube status command. It will indicate docker-env: in use if in use as follows:

```
minikube
type: Control Plane
host: Running
kubelet: Running
apiserver: Running
kubeconfig: Configured
docker-env: in-use
```

#### 4.3.3 3. Install the umbrella chart.

```
make k8s-install-chart          # deploy from Helm charts
make k8s-install-chart-only    # deploy from Helm charts without updating dependencies
```

*Note:* make k8s-watch will list all of the pods' status in every 2 seconds using kubectl; make k8s-wait will wait until all jobs are 'Completed' and pods are 'Running'.

#### 4.3.4 4. (Optional) Create python virtual environment to isolate project specific dependencies from your host environment.

```
virtualenv venv               # create python virtualenv 'venv'
source venv/bin/activate       # activate venv
```

### 4.3.5 5. Install linting and testing requirements.

```
make requirements
```

### 4.3.6 6. Install the MCS package in editable mode.

```
pip install -e .
```

### 4.3.7 7. Run a test.

```
make k8s-test  # functional tests with an already running deployment
make python-test # unit tests, deployment does not need to be running
```

*Note:* add -k pytest flags in setup.cfg in the project root to limit which tests are run

### 4.3.8 8. Tear down the deployment.

```
make k8s-uninstall-chart          # uninstall deployment from Helm charts
deactivate                      # if in active virtualenv
eval $(minikube docker-env --unset) # if docker-env variables were set previously
minikube stop                    # stop minikube
```

## 4.4 Useful Minikube Commands

### 4.4.1 Create a minikube

```
minikube start
```

### 4.4.2 Check the status of the cluster created for your minikube

```
minikube status
```

### 4.4.3 Fixing a Misconfigured Kubeconfig

If the kubeconfig is pointing to a stale minikube and is showing as **Misconfigured** when checking the minikube status, or if the minikube's IP or port has changed, update the context as follows:

```
minikube update-context
```

#### 4.4.4 Delete a minikube profile

```
minikube delete
```

#### 4.4.5 Set and unset docker-env variables

```
eval $(minikube docker-env)  
eval $(minikube docker-env --unset)
```

### 4.5 Taranta

This provides a graphical user interface using Taranta (previously known as WebJive); to set it up:

- Add the following line to `/etc/hosts`:

```
192.168.49.2 taranta
```

*Note:* 192.168.49.2 is the minikube IP address, obtainable with the command `minikube ip`

- Navigate to `taranta/ska-mid-cbf/taranta/devices` in a browser (works best with Google Chrome).

The following credentials can be used to operate the system:

- Username: `user1`
- Password: `abc123`

The device tree can be viewed and explored. In addition, device attributes can be seen and modified, and device commands can be sent, by creating and saving a new dashboard.

### 4.6 Generating Documentation

To re-generate the documentation locally prior to checking in updates to Git:

```
make docs-build html
```

To see the generated documentation, open `/ska-mid-cbf-mcs/docs/build/html/index.html` in a browser – e.g.,

```
firefox docs/build/html/index.html &
```

### 4.7 Releasing

For a new release (i.e. prior to merging a branch into main) update the following files by incrementing version/release/tag number fields to conform to the semantic versioning convention:

- `.release: release=` and `tag=`
- `src/ska_mid_cbf_mcs/release.py: version =`
- `charts/ska-mid-cbf/Chart.yaml: version: and appVersion:`
- `charts/ska-mid-cbf/values.yaml: midcbf:image:tag:`

- charts/ska-mid-cbf-tmleafnode/Chart.yaml: version: and appVersion:
- charts/ska-mid-cbf-tmleafnode/values.yaml: midcbf:image:tag:
- charts/mid-cbf-umbrella/Chart.yaml:
  - version: and appVersion:
  - version: under ska-mid-cbf and ska-mid-cbf-tmleafnode

*Note:* appVersion represents the version of the application running, so it corresponds to the ska-mid-cbf-mcs docker image version.

Once a new release has been merged into main, create a new tag on GitLab and run the manual “publish-chart” stage of the tag pipeline to publish the Helm charts.

## 4.8 Development resources

### 4.8.1 Other resources

See more tango device guidelines and examples in the `ska-tango-examples` repository

### 4.8.2 Useful commands

#### Kubernetes

For Kubernetes basic kubectl commands see: <https://kubernetes.io/docs/reference/kubectl/cheatsheet/>

To display components of the MCS Kubernetes system:

```
kubectl get all -n ska-mid-cbf
kubectl describe <component-name> -n ska-mid-cbf # info on a particular component
```

This should list the following running pods:

- cbfcontroller-controller-0 : The CbfController TANGO device server.
- cbfsubarrayxx-cbf-subarray-xx-0: xx ranges from 01 to 03. The 3 instances of the CbfSubarray TANGO device server.
- fspxx-fsp-xx-0: xx ranges from 01 to 04. The 4 instances of the FspMulti TANGO device servers.
- vccxxx-vcc-xxx-0: xxx ranges from 001 to 004. The 4 instances of the VccMulti TANGO device servers.
- tmcpspsubarrayleafnodetestx-tmx-0: x ranges from 1 to 2. The 2 instances of the TmCspSubarrayLeafNodeTest TANGO device servers.
- tango-host-databaseds-from-makefile-test-0: The TANGO DB device server.
- etc.

## 4.9 License

See the LICENSE file for details.

## **CODE ELEMENT DESIGN NOTES**

### **5.1 Component Managers**

More details about the role of component managers can be found in the [SKA Tango Base Documentation](#). In the Mid.CBF MCS each component has a Tango device class and a component manager class. The Tango device class updates its state model(s) (the `op_state_model` and/or `obs_state_model`). The Tango device class does not directly communicate with its component, instead it tells its component manager class what to do by calling its methods. The component manager class directly interacts with its component. Its role is to establish communication with its component and monitor and control it. An example of this Tango device and component manager interaction is shown in the diagram below.

### **5.2 Cbf Controller**


The `CbfController` Tango device controls its subordinate Tango devices: `Fsp`, `Vcc`, `CbfSubarray` and `TalonLRU`. It is responsible for turning these subordinate devices on and off, and putting the `Fsp`, ```Vcc`'' and `CbfSubarray` devices in STANDBY mode. The `CbfController` also initiates the configuration of the Talon-DX boards. The `CbfController` device's OnCommand triggers `TalonDxComponentManager.configure_talons` to be called which copies the device server binaries and FPGA bitstream to the Talon-DX boards, starts the HPS master device server and sends the configure command to each `DsHpsMaster` device.

### **5.3 Cbf Subarray**

The `CbfSubarray` Tango device is used to monitor and control scan operation of a Mid.CBF receptor subarray. This device receives one configuration per scan, and a subarray may accept this scan configuration only after being assigned at least one receptor.

#### **5.3.1 Receptor assignment**

Receptor assignment to a subarray is done before configuration for a scan. Receptor assignment is exclusive; receptors assigned to one subarray cannot belong to any other subarray. Up to 197 receptors can be assigned to one subarray; currently, there is only support for 4 receptors.

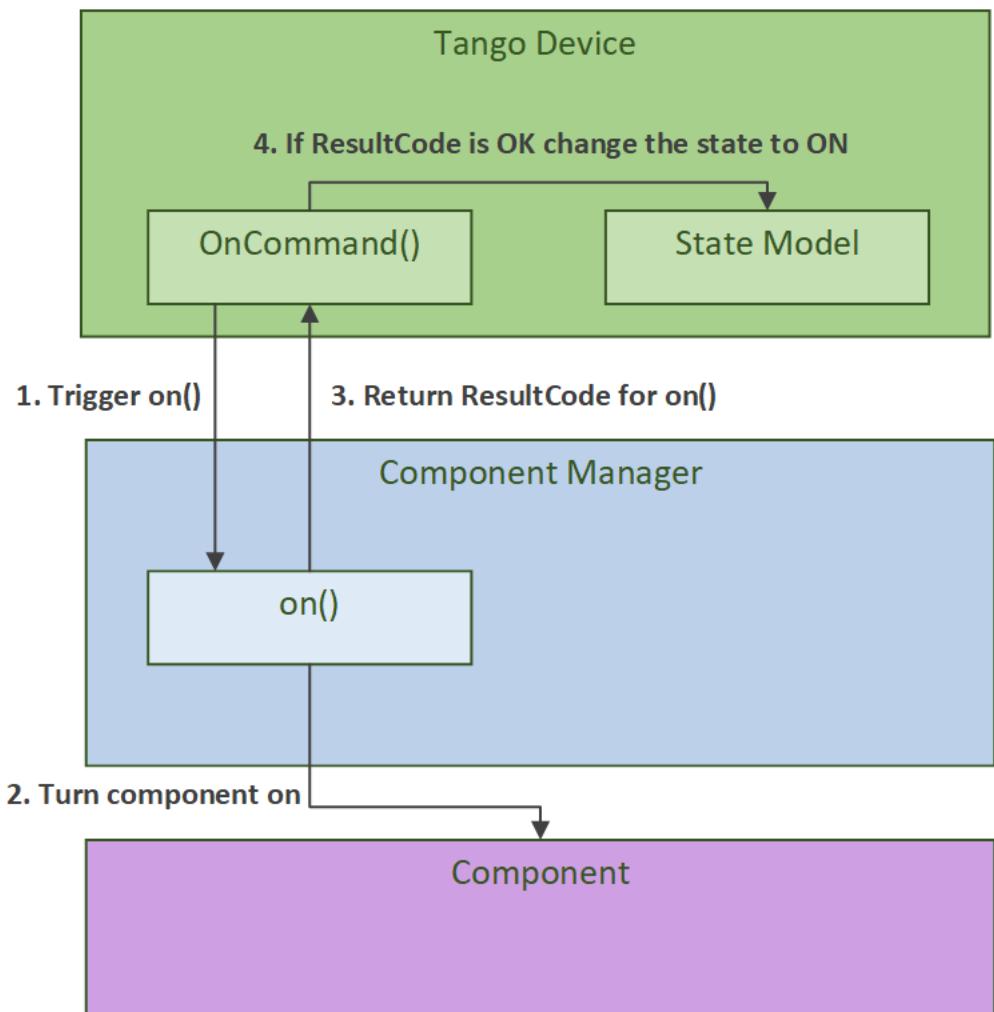

### 5.3.2 Scan configuration

Subarrays receive a scan configuration via an ASCII encoded JSON string. The scan configuration is validated for completeness and its parameters implemented as Tango device attributes; the subarray device will then also configure subordinate devices with the relevant parameters, including VCC, FSP and FSP-subarray devices.

## 5.4 Frequency Slice Processor (FSP)

The Fsp Tango device is used for monitoring and control of a Frequency Slice Processor (FSP) during scan operation. An FSP device can be configured for processing of one of up to twenty-six frequency slices (depending on observational frequency band). Additionally, an FSP can be assigned to any number of subarrays with matching configurations.

### 5.4.1 Fsp Function Mode

There are four function modes available for FSP scan configuration, each with a corresponding function mode capability and subarray device per FSP; furthermore, each FSP function mode subarray device corresponds to a unique pairing of one FSP with one subarray. Currently, one subarray and four FSPs are supported.

FSP Function Mode Subarray devices:

- Correlation (CORR): `FspCorrSubarray`
- Pulsar Search Beamforming (PSS-BF): `FspPssSubarray`
- Pulsar Timing Beamforming (PST-BF): `FspPstSubarray`
- VLBI Beamforming (VLBI): `FspVlbiSubarray`

## 5.5 Mid.Cbf VCC Device Server (VccMulti)

### 5.5.1 VCC Device

The Vcc Tango device is used to control and monitor the functionality for a single Talon-DX board that runs VCC functionality. This device communicates with the top-level VCC device server running on the Talon-DX board to coordinate setup and processing activites of low-level device servers.

The Vcc device can operated in either simulation mode or not. When in simulation mode (this is the default), simulator classes are used in place of communication with the real Talon-DX Tango devices. This allows testing of the MCS without any connection to the hardware.

## 5.6 Talon LRU

The TalonLRU Tango device handles the monitor and control functionality for a single Talon LRU. A TalonLRU instance must therefore be created for each LRU. Currently this device only controls the power to the LRU via a proxy to the `PowerSwitch` device.

The operational state of this device always reflects the power state of the LRU. If at least one of the PDU outlets connected to the LRU is switched on, the state of the TalonLRU device should be ON. If both outlets are switched off, then the state should be OFF.

If the state of the outlets is not consistent with the state of the TalonLRU device when it starts up (or when `simulationMode` of the `PowerSwitch` device changes), the TalonLRU device transitions into a FAULT state. The

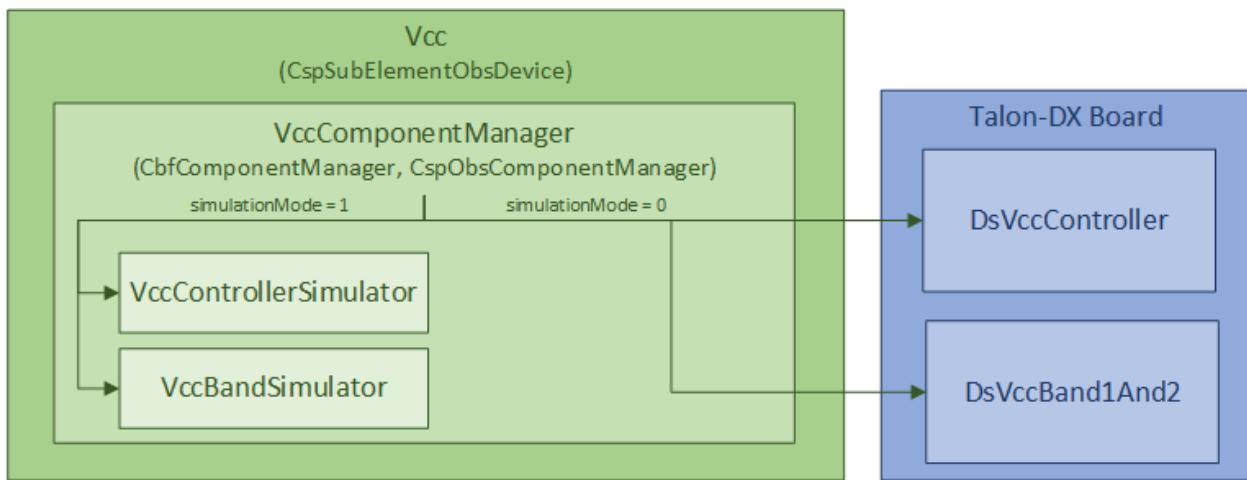


Fig. 1: MCS Vcc Device

power outlets must then be manually switched to the expected startup state via some other method before resetting the TalonLRU device.

The expected startup state of the device is OFF.

## 5.7 Power Switch

The **PowerSwitch** Tango device is used to control and monitor the web power switch that provides power to the Talon LRUs. The current power switch in use is the DLI LPC9 ([User Guide](#)). The power switch has 8 programmable outlets, meaning that it can power up to 4 Talon LRUs (each LRU needs two power supply lines).

The **PowerSwitch** device can be operated in either simulation mode or not. When in simulation mode (this is the default), the **PowerSwitchSimulator** is used in place of communication with the real power switch hardware. This allows testing of the MCS with no hardware connected.

When integration testing with the hardware is desired, the **simulationMode** attribute can be set to 0. This initializes communication with the real power switch via the **PowerSwitchDriver**, and queries the list of outlets in the power switch.

Important operational notes:

- Certain requests to the power switch hardware can take longer than others, hence a timeout of 4 seconds set in the **PowerSwitchDriver**. As such, accessing attributes or commands in the **PowerSwitch** device can take longer than the default Tango timeout (3 seconds). Any **DeviceProxy** of the **PowerSwitch** device should increase its timeout to 5 seconds to safely complete all requests (both successful and unsuccessful) before the Tango timeout. This can be done using `pwr_dev_proxy.set_timeout_millis(5000)`, assuming `pwr_dev_proxy` is a **DeviceProxy** to the **PowerSwitch** device.
- Although the DLI LPC9 claims to support up to 8 concurrent clients, testing has shown a significant slow down in response time when more than one request has been sent to the power switch. As such, all communication with the power switch should be kept sequential. Currently the **PowerSwitchDriver** does not ensure this. If the **PowerSwitch** device is ever changed to handle requests asynchronously, the **PowerSwitchDriver** should also be updated to only process one request at a time.

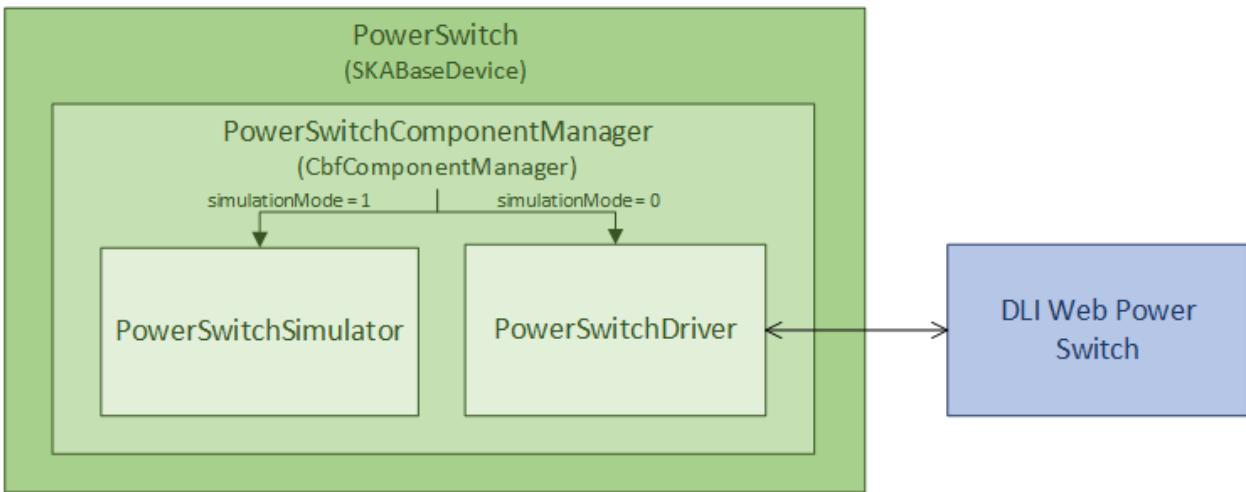


Fig. 2: MCS PowerSwitch Device

## 5.8 Talon DX Log Consumer

The Talon DX Log Consumer is a Tango device intended to run on the host machine that connects to the Talon-DX boards. This Tango device is set up as a default logging target for all the Tango device servers running on the HPS of each Talon-DX board. When the HPS device servers output logs via the Tango Logging Service, the logs get transmitted to this log consumer device where they get converted to the SKA logging format and outputted once again via the SKA logging framework. In this way logs from the Talon-DX boards can be aggregated in once place and eventually shipped to the Elastic framework in the same way as logs from the Mid CBF Monitor and Control Software (MCS).

Note: more instances of the device may be created to provide enough bandwidth for all the HPS device servers.

### 5.8.1 Connecting from HPS DS to the Log Consumer

The Talon-DX boards connect to the host machine (currently known as the development server) over a single Ethernet connection. The IP address of the development server on this connection is 169.254.100.88 and all outgoing traffic from the Talon-DX boards must be addressed to this IP.

When the log consumer starts up on the development server, the OmniORB end point (IP address and port) it is assigned is local to the development server (i.e. IP address 142.73.34.173, arbitrary port). Since the Talon boards are unable to connect to this IP address, we need to manually publish a different endpoint when starting up the log consumer that is visible to the HPS devices.

The following ORB arguments are used (see the make target `talondx-log-consumer`):

- `-ORBEndPointPublish giop:tcp:169.254.100.88:60721`: Exposes this IP address and port to all clients of this Tango device. When the HPS device servers contact the database to get the network information of the log consumer, this is the IP address and port that is returned. The IP addresses matches that of the Ethernet connection to the development server, allowing the HPS device servers to direct their messages across that interface.
- `-ORBEndPoint giop:tcp:142.73.34.173:60721`: Assigns the IP address and port that the log consumer device is actually running on. This needs to be manually assigned since an iptables mapping rule was created on the development server to route any TCP traffic coming in on 169.254.100.88:60721 to 142.73.34.173:60721.

Some important notes:

- Due to the end point publishing, no Tango devices running on the development server will be able to connect to the log consumer (including being able to configure the device from Jive). This is because the published IP address is not accessible on the development server. There may be a way to publish multiple endpoints, but this needs further investigation.
- If the log consumer device cannot be started due to an OmniORB exception saying that the end point cannot be created, it is possible that the 142.73.34.173 needs to change to something else. It is not yet clear why this can happen. To change it do the following:
  - Remove the ORB arguments from the `talondx-log-consumer` make target, and then start the log consumer.
  - Open up Jive and look at what IP address is automatically assigned to the log consumer device. This is the IP address that we now need to use for the endpoint.
  - Find the iptables rule that maps 169.254.100.88:60721 to 142.73.34.173:60721, and change it to the new IP address.
  - Add the ORB arguments back in, using the correct IP address for the end point.

---

CHAPTER  
SIX

---

CODE

## 6.1 CbfComponentManager

### 6.1.1 CbfComponentManager Class

```
class ska_mid_cbf_mcs.component.component_manager.CbfComponentManager(*args: Any, **kwargs: Any)
```

Bases: BaseComponentManager

A base component manager for SKA Mid.CBF MCS

This class exists to modify the interface of the `ska_tango_base.base.component_manager.BaseComponentManager`. The `BaseComponentManager` accepts an `op_state_model` argument, and is expected to interact directly with it. This is not a very good design decision. It is better to leave the `op_state_model` behind in the device, and drive it indirectly through callbacks.

Therefore this class accepts three callback arguments: one for when communication with the component changes, one for when the power mode of the component changes, and one for when the component fault status changes. In the last two cases, callback hooks are provided so that the component can indicate the change to this component manager.

`start_communicating() → None`

Start communicating with the component.

`stop_communicating() → None`

Break off communicating with the component.

`update_communication_status(communication_status: CommunicationStatus) → None`

Handle a change in communication status.

This is a helper method for use by subclasses.

#### Parameters

`communication_status` – the new communication status of the component manager.

`property is_communicating: bool`

Return communication with the component is established.

SKA Mid.CBF MCS uses the more expressive `communication_status` for this, but this is still needed as a base classes hook.

#### Returns

whether communication with the component is established.

**property communication\_status: CommunicationStatus**

Return the communication status of this component manager.

This is implemented as a replacement for the `is_communicating` property, which should be deprecated.

**Returns**

status of the communication channel with the component.

**update\_component\_power\_mode(power\_mode: *Optional[ska\_tango\_base.control\_model.PowerMode]*) → None**

Update the power mode, calling callbacks as required.

This is a helper method for use by subclasses.

**Parameters**

**power\_mode** – the new power mode of the component. This can be `None`, in which case the internal value is updated but no callback is called. This is useful to ensure that the callback is called next time a real value is pushed.

**component\_power\_mode\_changed(power\_mode: *ska\_tango\_base.control\_model.PowerMode*) → None**

Handle notification that the component's power mode has changed.

This is a callback hook, to be passed to the managed component.

**Parameters**

**power\_mode** – the new power mode of the component

**property power\_mode: *Optional[ska\_tango\_base.control\_model.PowerMode]***

Return the power mode of this component manager.

**Returns**

the power mode of this component manager.

**update\_component\_fault(faulty: *Optional[bool]*) → None**

Update the component fault status, calling callbacks as required.

This is a helper method for use by subclasses.

**Parameters**

**faulty** – whether the component has faulted. If `False`, then this is a notification that the component has *recovered* from a fault.

**component\_fault\_changed(faulty: *bool*) → None**

Handle notification that the component's fault status has changed.

This is a callback hook, to be passed to the managed component.

**Parameters**

**faulty** – whether the component has faulted. If `False`, then this is a notification that the component has *recovered* from a fault.

**property faulty: *Optional[bool]***


Return whether this component manager is currently experiencing a fault.

**Returns**


whether this component manager is currently experiencing a fault.

The MCS contains two types of Tango devices: observing and non-observing. Non-observing devices contain only an `op_state_model` while observing devices contain both an `op_state_model` and `obs_state_model`. As shown in the inheritance diagram below, non-observing devices inherit from `CbfComponentManager` while observing devices inherit from `CbfComponentManager` and `CspObsComponentManager`.

### Non-Observing Device Inheritance

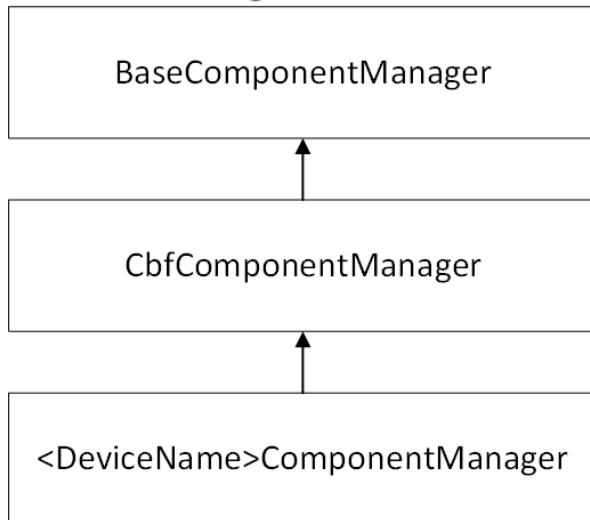

### Observing Device Inheritance

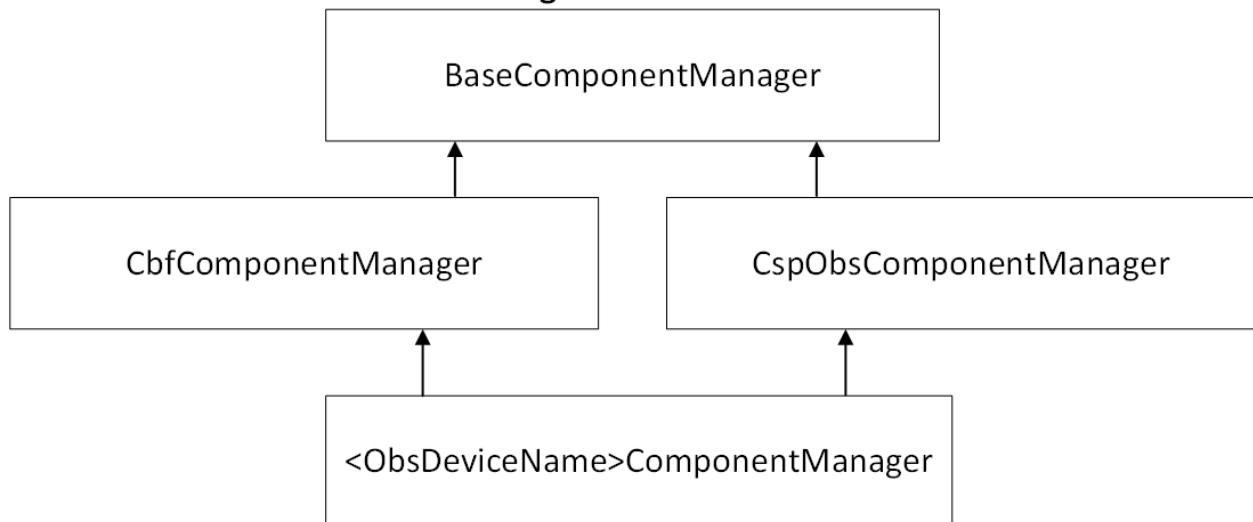

## 6.2 CbfController

### 6.2.1 CbfController Class

```
class ska_mid_cbf_mcs.controller.controller_device.CbfController(*args: Any, **kwargs: Any)
    Bases: SKAController

    CbfController TANGO device class. Primary point of contact for monitoring and control of Mid.CBF. Implements state and mode indicators, and a set of state transition commands.

    init_command_objects() → None
        Sets up the command objects

    get_num_capabilities() → None
        Get number of capabilities for _init_Device. If property not found in db, then assign a default amount(197,27,16)

    class InitCommand(*args: Any, **kwargs: Any)
        Bases: InitCommand

        do() → Tuple[ska_tango_base.commands.ResultCode, str]
            Stateless hook for device initialisation. :return: A tuple containing a return code and a string message indicating status. The message is for information purpose only. :return: (ResultCode, str)

    always_executed_hook() → None
        Hook to be executed before any command.

    create_component_manager() → ControllerComponentManager
        Create and return a component manager for this device.

        Returns
            a component manager for this device.

    delete_device() → None
        Unsubscribe to events, turn all the subarrays, VCCs and FSPs off

    read_commandProgress() → int
        Return commandProgress attribute: percentage progress implemented for commands that result in state/mode transitions for a large number of components and/or are executed in stages (e.g power up, power down)

    read_receptorToVcc() → List[str]
        Return ‘receptorID:vccID’

    read_vccToReceptor() → List[str]
        Return receptorToVcc attribute: ‘vccID:receptorID’

    read_subarrayconfigID() → List[str]
        Return subarrayconfigID attribute: ID of subarray config. Used for debug purposes. empty string if subarray is not configured for a scan

    read_frequencyOffsetK() → List[int]
        Return frequencyOffsetK attribute: array of integers reporting receptors in subarray

    write_frequencyOffsetK(value: List[int]) → None
        Set frequencyOffsetK attribute
```

---

**read\_frequencyOffsetDeltaF()** → `List[int]`  
 Return frequencyOffsetDeltaF attribute: Frequency offset (delta f) of all 197 receptors as an array of ints.

**write\_frequencyOffsetDeltaF(value: List[int])** → `None`  
 Set the frequencyOffsetDeltaF attribute

**write\_simulationMode(value: ska\_tango\_base.control\_model.SimulationMode)** → `None`  
 Set the Simulation Mode of the device.

**Parameters**  
**value** – `SimulationMode`

**class OnCommand(\*args: Any, \*\*kwargs: Any)**  
 Bases: `OnCommand`  
 A class for the CbfController's On() command.  
**do()** → `Tuple[ska_tango_base.commands.ResultCode, str]`  
 Stateless hook for On() command functionality.  
**Returns**  
 A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**  
`(ResultCode, str)`

**class OffCommand(\*args: Any, \*\*kwargs: Any)**  
 Bases: `OffCommand`  
 A class for the CbfController's Off() command.  
**do()** → `Tuple[ska_tango_base.commands.ResultCode, str]`  
 Stateless hook for Off() command functionality.  
**Returns**  
 A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**  
`(ResultCode, str)`

**class StandbyCommand(\*args: Any, \*\*kwargs: Any)**  
 Bases: `StandbyCommand`  
 A class for the CbfController's Standby() command.  
**do()** → `Tuple[ska_tango_base.commands.ResultCode, str]`  
 Stateless hook for Standby() command functionality. Turn off subarray, vcc, fsp, turn CbfController to standby  
**Returns**  
 A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**  
`(ResultCode, str)`

## 6.2.2 ControllerComponentManager Class

```
class ska_mid_cbf_mcs.controller.controller_component_manager.ControllerComponentManager(*args:  
    Any,  
    **kwargs:  
    Any)
```

Bases: *CbfComponentManager*

A component manager for the CbfController device.

**start\_communicating()** → *None*

Establish communication with the component, then start monitoring.

**stop\_communicating()** → *None*

Stop communication with the component

**on()** → *Tuple[ska\_tango\_base.commands.ResultCode, str]*

Turn on the controller and its subordinate devices

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**off()** → *Tuple[ska\_tango\_base.commands.ResultCode, str]*

Turn off the controller and its subordinate devices

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**standby()** → *Tuple[ska\_tango\_base.commands.ResultCode, str]*

Turn the controller into low power standby mode

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

## 6.2.3 TalonDxComponentManager Class

The **TalonDxComponentManager** is used to configure and start up Tango device servers on the Talon boards. These actions are performed during the On command of the **CbfController**. Note that these actions are not executed when the **simulationMode** of the **CbfController** is set to 1 (this is the default). Prior to sending the On command to the **CbfController**, the **simulationMode** should be set to 0 if it is desired to test the command with the Talon boards in the loop.

```
class ska_mid_cbf_mcs.controller.talondx_component_manager.TalonDxComponentManager(talondx_config_path:
    str,
    simulation_mode:
    ska_tango_base.control_m
    logger:
    Logger)
```

Bases: `object`

A component manager for the Talon-DX boards. Used to configure and start the Tango applications on the HPS of each board.

`configure_talons()` → `ska_tango_base.commands.ResultCode`

Performs all actions to configure the Talon boards after power on and start the HPS device servers. This includes: copying the device server binaries and FPGA bitstream to the Talon boards, starting the HPS master device server and sending the configure command to each DsHpsMaster.

**Returns**

`ResultCode.FAILED` if any operations failed, else `ResultCode.OK`

`_setup_tango_host_file()` → `None`

Copy the `hps_master_mcs.sh` file from `mnt` into `mnt/talondx-config`

**Returns**

`ResultCode.OK` if all artifacts were copied successfully, otherwise `ResultCode.FAILED`

`_secure_copy(ssh_client: paramiko.SSHClient, src: str, dest: str)` → `None`

Execute a secure file copy to the specified target address.

**Parameters**

- **ssh\_client** – SSH client for the Talon board we are trying to SCP to
- **src** – Source file path
- **dest** – Destination file path

**Raises**

`SCPException` – if the file copy fails

`_configure_talon_networking()` → `ska_tango_base.commands.ResultCode`

Configure the networking of the boards including DNS nameserver and ifconfig for default gateway

**Returns**

`ResultCode.OK` if all artifacts were copied successfully, otherwise `ResultCode.FAILED`

`_copy_binaries_and_bitstream()` → `ska_tango_base.commands.ResultCode`

Copy the relevant device server binaries and FPGA bitstream to each Talon board.

**Returns**

`ResultCode.OK` if all artifacts were copied successfully, otherwise `ResultCode.FAILED`

`_start_hps_master()` → `ska_tango_base.commands.ResultCode`

Start the DsHpsMaster on each Talon board.

**Returns**

`ResultCode.OK` if all HPS masters were started successfully, otherwise `ResultCode.FAILED`

`_create_hps_master_device_proxies()` → `ska_tango_base.commands.ResultCode`

Attempt to create a device proxy to each DsHpsMaster device.

**Returns**

resultCode.OK if all proxies were created successfully, otherwise resultCode.FAILED

**\_configure\_hps\_master()** → ska\_tango\_base.commands.ResultCode

Send the configure command to all the DsHpsMaster devices.

**Returns**

resultCode.OK if all configure commands were sent successfully, otherwise resultCode.FAILED

## 6.3 CbfSubarray

### 6.3.1 CbfSubarray Class

**class** ska\_mid\_cbf\_mcs.subarray.subarray\_device.CbfSubarray(\*args: *Any*, \*\*kwargs: *Any*)

Bases: CspSubElementSubarray

CBFSubarray TANGO device class for the CBFSubarray prototype

**init\_command\_objects()** → *None*

Sets up the command objects. Register the new Commands here.

**class** InitCommand(\*args: *Any*, \*\*kwargs: *Any*)

Bases: InitCommand

A class for the CbfSubarray's init\_device() "command".

**do()** → Tuple[ska\_tango\_base.commands.ResultCode, str]

Stateless hook for device initialisation. Initialize the attributes and the properties of the CbfSubarray.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(resultCode, str)

**create\_component\_manager()** → *CbfSubarrayComponentManager*

Create and return a subarray component manager.

**Returns**

a subarray component manager

**always\_executed\_hook()** → *None*

methods always executed before any TANGO command is executed

**delete\_device()** → *None*

Hook to delete device.

**read\_frequencyBand()** → int

Return frequency band assigned to this subarray. One of [“1”, “2”, “3”, “4”, “5a”, “5b”, ]

**Returns**

the frequency band

**Return type**

int

**read\_receptors()** → `List[str]`

Return list of receptors assigned to subarray

**Returns**

the list of receptors

**Return type**

`List[str]`

**write\_receptors(*value: List[str]*)** → `None`

Set receptors of this array to the input value. Input should be an array of int

**Parameters**

**value** – the list of receptors

**read\_frequencyOffsetK()** → `List[int]`

Return frequencyOffsetK attribute: array of integers reporting receptors in subarray

**write\_frequencyOffsetK(*value: List[int]*)** → `None`

Set frequencyOffsetK attribute

**read\_frequencyOffsetDeltaF()** → `int`

Return frequencyOffsetDeltaF attribute: Frequency offset (delta f)

**write\_frequencyOffsetDeltaF(*value: int*)** → `None`

Set the frequencyOffsetDeltaF attribute

**class RemoveReceptorsCommand(\*args: Any, \*\*kwargs: Any)**

Bases: `ReleaseResourcesCommand`

A class for CbfSubarray's RemoveReceptors() command. Equivalent to the `ReleaseResourcesCommand` in ADR-8.

**do(*argin: List[str]*)** → `Tuple[ska_tango_base.commands.ResultCode, str]`

Stateless hook for RemoveReceptors() command functionality.

**Parameters**

**argin** – The receptors to be released

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

`(ResultCode, str)`

**validate\_input(*argin: List[str]*)** → `Tuple[bool, str]`

Validate receptor ids.

**Parameters**

**argin** – The list of receptor IDs to remove.

**Returns**

A tuple containing a boolean indicating if the configuration is valid and a string message. The message is for information purpose only.

**Return type**

`(bool, str)`

**RemoveReceptors(*argin: List[str]*)** → `Tuple[ska_tango_base.commands.ResultCode, str]`

Remove from list of receptors. Turn Subarray to ObsState = EMPTY if no receptors assigned. Uses RemoveReceptorsCommand class.

**Parameters**

**argin** – list of receptor IDs to remove

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**class RemoveAllReceptorsCommand(\*args: Any, \*\*kwargs: Any)**

Bases: ReleaseAllResourcesCommand

A class for CbfSubarray's RemoveAllReceptors() command.

**do()** → Tuple[ska\_tango\_base.commands.ResultCode, str]

Stateless hook for RemoveAllReceptors() command functionality.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**class AddReceptorsCommand(\*args: Any, \*\*kwargs: Any)**

Bases: AssignResourcesCommand

A class for CbfSubarray's AddReceptors() command.

**do(argin: List[str])** → Tuple[ska\_tango\_base.commands.ResultCode, str]

Stateless hook for AddReceptors() command functionality.

**Parameters**

**argin** – The receptors to be assigned

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**validate\_input(argin: List[str])** → Tuple[bool, str]

Validate receptor ids.

**Parameters**

**argin** – The list of receptor IDs to add.

**Returns**

A tuple containing a boolean indicating if the configuration is valid and a string message. The message is for information purpose only.

**Return type**

(bool, str)

**class ConfigureScanCommand(\*args: Any, \*\*kwargs: Any)**

Bases: ConfigureScanCommand

A class for CbfSubarray's ConfigureScan() command.

**do(argin: str)** → Tuple[ska\_tango\_base.commands.ResultCode, str]

Stateless hook for ConfigureScan() command functionality.

**Parameters**

**argin** – The configuration as JSON formatted string.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

---

**Return type**  
(ResultCode, str)

**validate\_input**(argin: str) → Tuple[bool, str]

Validate scan configuration.

**Parameters**

argin – The configuration as JSON formatted string.

**Returns**

A tuple containing a boolean indicating if the configuration is valid and a string message. The message is for information purpose only.

**Return type**  
(bool, str)

**class ScanCommand(\*args: Any, \*\*kwargs: Any)**

Bases: ScanCommand

A class for CbfSubarray's Scan() command.

**do**(argin: str) → Tuple[ska\_tango\_base.commands.ResultCode, str]

Stateless hook for Scan() command functionality.

**Parameters**

argin (str) – The scan ID as JSON formatted string.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**  
(ResultCode, str)

**class EndScanCommand(\*args: Any, \*\*kwargs: Any)**

Bases: EndScanCommand

A class for CbfSubarray's EndScan() command.

**do**() → Tuple[ska\_tango\_base.commands.ResultCode, str]

Stateless hook for EndScan() command functionality.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**  
(ResultCode, str)

### 6.3.2 CbfSubarray Component Class

**class ska\_mid\_cbf\_mcs.subarray.subarray\_component\_manager.CbfSubarrayComponentManager(\*args: Any, \*\*kwargs: Any)**

Bases: CbfComponentManager, CspSubarrayComponentManager

A component manager for the CbfSubarray class.

**property config\_id: str**  
Return the configuration ID.

**property scan\_id: int**  
Return the scan ID.

**property subarray\_id: int**

Return the subarray ID.

**property frequency\_band: int**

Return the frequency band.

**property receptors: List[str]**

Return the receptor list.

**start\_communicating() → None**

Establish communication with the component, then start monitoring.

**stop\_communicating() → None**

Stop communication with the component.

**on() → None**

**off() → None**

**standby() → None**

**validate\_ip(ip: str) → bool**

Validate IP address format.

**Parameters**

**ip** – IP address to be evaluated

**Returns**

whether or not the IP address format is valid

**Return type**

**bool**

**raise\_configure\_scan\_fatal\_error(msg: str) → Tuple[ska\_tango\_base.commands.ResultCode, str]**

Raise fatal error in ConfigureScan execution

**Parameters**

**msg** – error message

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

**(ResultCode, str)**

**deconfigure() → Tuple[ska\_tango\_base.commands.ResultCode, str]**

Completely deconfigure the subarray; all initialization performed by the ConfigureScan command must be ‘undone’ here.

**validate\_input(argin: str) → Tuple[bool, str]**

Validate scan configuration.

**Parameters**

**argin** – The configuration as JSON formatted string.

**Returns**

A tuple containing a boolean indicating if the configuration is valid and a string message. The message is for information purpose only.

**Return type**

(bool, str)

**configure\_scan**(*argin: str*) → Tuple[ska\_tango\_base.commands.ResultCode, str]**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**remove\_receptors**(*argin: List[str]*) → Tuple[ska\_tango\_base.commands.ResultCode, str]

Remove receptor from subarray.

**Parameters****argin** – The receptors to be released**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**remove\_all\_receptors**() → Tuple[ska\_tango\_base.commands.ResultCode, str]

Remove all receptors from subarray.

**Parameters****receptor\_id** – The receptor to be released**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**add\_receptors**(*argin: List[str]*) → Tuple[ska\_tango\_base.commands.ResultCode, str]

Add receptors to subarray.

**Parameters****argin** – The receptors to be assigned**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**scan**(*argin: Dict[Any]*) → Tuple[ResultCode, str]

Start subarray Scan operation.

**Parameters****argin** (*str*) – The scan ID as JSON formatted string.**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**end\_scan()** → Tuple[ska\_tango\_base.commands.ResultCode, str]

End subarray Scan operation.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**abort()** → None

Abort subarray configuration or operation.

**restart()** → None

Restart from fault.

**obsreset()** → None

Reset subarray scan configuration or operation.

**update\_component\_resources(*resourced: bool*)** → None

Update the component resource status, calling callbacks as required.

**Parameters**

**resourced** – whether the component is resourced.

**update\_component\_configuration(*configured: bool*)** → None

Update the component configuration status, calling callbacks as required.

**Parameters**

**configured** – whether the component is configured.

## 6.4 Fsp

### 6.4.1 Fsp Class

**class ska\_mid\_cbf\_mcs.fsp.fsp\_device.Fsp(\*args: Any, \*\*kwargs: Any)**

Bases: SKACapability

Fsp TANGO device class for the prototype

**init\_command\_objects()** → None

Sets up the command objects

**always\_executed\_hook()** → None

Hook to be executed before any commands.

**create\_component\_manager()** → FspComponentManager

Create and return a component manager for this device.

**Returns**

a component manager for this device.

**delete\_device()** → None

Hook to delete device.

**write\_simulationMode**(*value*: *ska\_tango\_base.control\_model.SimulationMode*) → *None*

Set the simulation mode of the device.

**Parameters**

**value** – *SimulationMode*

**read\_functionMode**() → *tango.DevEnum*

Read the functionMode attribute.

**Returns**

a *DevEnum* representing the mode.

**Return type**

*tango.DevEnum*

**read\_subarrayMembership**() → *List[int]*

Read the subarrayMembership attribute.

**Returns**

an array of affiliations of the FSP.

**Return type**

*List[int]*

**read\_scanID**() → *int*

Read the scanID attribute.

**Returns**

the scanID attribute.

**Return type**

*int*

**read\_configID**() → *str*

Read the configID attribute.

**Returns**

the configID attribute.

**Return type**

*str*

**write\_configID**(*value*: *str*) → *None*

Write the configID attribute.

**Parameters**

**value** – the configID value.

**read\_jonesMatrix**() → *str*

Read the jonesMatrix attribute.

**Returns**

the jonesMatrix attribute.

**Return type**

*string*

**read\_delayModel**() → *str*

Read the delayModel attribute.

**Returns**

the delayModel attribute.

**Return type**

string

`read_timingBeamWeights() → str`

Read the timingBeamWeights attribute.

**Returns**

the timingBeamWeights attribute.

**Return type**

string

`class InitCommand(*args: Any, **kwargs: Any)`

Bases: `InitCommand`

A class for the Fsp's init\_device() "command".

`do() → Tuple[ska_tango_base.commands.ResultCode, str]`

Stateless hook for device initialisation.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

`(ResultCode, str)`

`class OnCommand(*args: Any, **kwargs: Any)`

Bases: `OnCommand`

A class for the Fsp's On() command.

`do() → Tuple[ska_tango_base.commands.ResultCode, str]`

Stateless hook for On() command functionality.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

`(ResultCode, str)`

`class OffCommand(*args: Any, **kwargs: Any)`

Bases: `OffCommand`

A class for the Fsp's Off() command.

`do() → Tuple[ska_tango_base.commands.ResultCode, str]`

Stateless hook for Off() command functionality.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

`(ResultCode, str)`

`class StandbyCommand(*args: Any, **kwargs: Any)`

Bases: `StandbyCommand`

A class for the Fsp's Standby() command.

`do() → Tuple[ska_tango_base.commands.ResultCode, str]`

Stateless hook for Standby() command functionality.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**class SetFunctionModeCommand(\*args: Any, \*\*kwargs: Any)**

Bases: ResponseCommand

A class for the Fsp's SetFunctionMode() command.

**do(argin: str) → Tuple[ska\_tango\_base.commands.ResultCode, str]**

Stateless hook for SetFunctionMode() command functionality.

**Parameters**

**argin** – one of ‘IDLE’, ‘CORR’, ‘PSS-BF’, ‘PST-BF’, or ‘VLBI’

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**SetFunctionMode(argin: str) → None**

Set the Fsp Function Mode, either IDLE, CORR, PSS-BF, PST-BF, or VLBI If IDLE set the pss, pst, corr and vlbi devices to DISABLE. Otherwise, turn one of them ON according to argin, and all others DISABLE.

**Parameters**

**argin** – one of ‘IDLE’, ‘CORR’, ‘PSS-BF’, ‘PST-BF’, or ‘VLBI’

**is\_SetFunctionMode\_allowed() → bool**

Determine if SetFunctionMode is allowed (allowed if FSP state is ON).

**Returns**

if SetFunctionMode is allowed

**Return type**

bool

**class AddSubarrayMembershipCommand(\*args: Any, \*\*kwargs: Any)**

Bases: ResponseCommand

A class for the Fsp's AddSubarrayMembership() command.

**do(argin: int) → Tuple[ska\_tango\_base.commands.ResultCode, str]**

Stateless hook for AddSubarrayMembership() command functionality.

**Parameters**

**argin** – an integer representing the subarray affiliation

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**AddSubarrayMembership(argin: str) → None**

Add a subarray to the subarrayMembership list.

**Parameters**

**argin** – an integer representing the subarray affiliation

**is\_AddSubarrayMembership\_allowed()** → `bool`

Determine if AddSubarrayMembership is allowed (allowed if FSP state is ON).

**Returns**

if AddSubarrayMembership is allowed

**Return type**

`bool`

**class RemoveSubarrayMembershipCommand(\*args: Any, \*\*kwargs: Any)**

Bases: `ResponseCommand`

A class for the Fsp's RemoveSubarrayMembership() command.

**do(argin: int) → Tuple[ska\_tango\_base.commands.ResultCode, str]**

Stateless hook for RemoveSubarrayMembership() command functionality.

**Parameters**

**argin** – an integer representing the subarray affiliation

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

`(ResultCode, str)`

**RemoveSubarrayMembership(argin: str) → None**

Remove subarray from the subarrayMembership list. If subarrayMembership is empty after removing (no subarray is using this FSP), set function mode to empty.

**Parameters**

**argin** – an integer representing the subarray affiliation

**is\_RemoveSubarrayMembership\_allowed()** → `bool`

Determine if RemoveSubarrayMembership is allowed (allowed if FSP state is ON).

**Returns**

if RemoveSubarrayMembership is allowed

**Return type**

`bool`

**getConfigID() → str**

Get the configID for all the fspCorrSubarray

**Returns**

the configID

**Return type**

`str`

**class UpdateJonesMatrixCommand(\*args: Any, \*\*kwargs: Any)**

Bases: `ResponseCommand`

A class for the Fsp's UpdateJonesMatrix() command.

**do(argin: str) → Tuple[ska\_tango\_base.commands.ResultCode, str]**

Stateless hook for UpdateJonesMatrix() command functionality.

**Parameters**

**argin** – the jones matrix data

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**UpdateJonesMatrix(*argin*: str) → None**

Update the FSP's jones matrix (serialized JSON object)

**Parameters**

**argin** – the jones matrix data

**is\_UpdateJonesMatrix\_allowed() → bool**

Determine if UpdateJonesMatrix is allowed (allowed if FSP state is ON and ObsState is READY OR SCAN-NINNG).

**Returns**

if UpdateJonesMatrix is allowed

**Return type**

bool

**class UpdateDelayModelCommand(\*args: Any, \*\*kwargs: Any)**

Bases: ResponseCommand

A class for the Fsp's UpdateDelayModel() command.

**do(*argin*: str) → Tuple[ska\_tango\_base.commands.ResultCode, str]**

Stateless hook for UpdateDelayModel() command functionality.

**Parameters**

**argin** – the delay model data

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**UpdateDelayModel(*argin*: str) → None**

Update the FSP's delay model (serialized JSON object)

**Parameters**

**argin** – the delay model data

**is\_UpdateDelayModel\_allowed() → bool**

Determine if UpdateDelayModel is allowed (allowed if FSP state is ON and ObsState is READY OR SCAN-NINNG).

**Returns**

if UpdateDelayModel is allowed

**Return type**

bool

**class UpdateTimingBeamWeightsCommand(\*args: Any, \*\*kwargs: Any)**

Bases: ResponseCommand

A class for the Fsp's UpdateTimingBeamWeights() command.

**do**(*argin: str*) → *Tuple[ska\_tango\_base.commands.ResultCode, str]*

Stateless hook for UpdateTimingBeamWeights() command functionality.

**Parameters**

**argin** – the timing beam weight data

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

*(ResultCode, str)*

**UpdateTimingBeamWeights**(*argin: str*) → *None*

Update the FSP's timing beam weights (serialized JSON object)

**Parameters**

**argin** – the timing beam weight data

**is\_UpdateTimingBeamWeights\_allowed()** → *bool*

Determine if UpdateTimingBeamWeights is allowed (allowed if FSP state is ON and ObsState is READY OR SCANNINNG).

**Returns**

if UpdateTimingBeamWeights is allowed

**Return type**

*bool*

## 6.4.2 FspComponentManager Class

**class** *ska\_mid\_cbf\_mcs.fsp.fsp\_component\_manager.FspComponentManager*(\**args: Any*, \*\**kwargs: Any*)

Bases: *CbfComponentManager*

A component manager for the Fsp device.

**property subarray\_membership: List[int]**

Subarray Membership

**Returns**

an array of affiliations of the FSP.

**Return type**

*List[int]*

**property function\_mode: tango.DevEnum**

Function Mode

**Returns**

the Fsp function mode

**Return type**

*tango.DevEnum*

**property jones\_matrix: str**

Jones Matrix

**Returns**

the jones matrix

**Return type**  
str

**property delay\_model: str**  
Delay Model

**Returns**  
the delay model

**Return type**  
str

**property timing\_beam\_weights: str**  
Timing Beam Weights

**Returns**  
the timing beam weights

**Return type**  
str

**property simulation\_mode: ska\_tango\_base.control\_model.SimulationMode**  
Get the simulation mode of the component manager.

**Returns**  
simulation mode of the component manager

**start\_communicating() → None**  
Establish communication with the component, then start monitoring.

**stop\_communicating() → None**  
Stop communication with the component

**remove\_subarray\_membership(argin: int) → Tuple[ska\_tango\_base.commands.ResultCode, str]**  
Remove subarray from the subarrayMembership list. If subarrayMembership is empty after removing (no subarray is using this FSP), set function mode to empty.

**Parameters**  
**argin** – an integer representing the subarray affiliation

**Returns**  
A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**  
(ResultCode, str)

**add\_subarray\_membership(argin: int) → Tuple[ska\_tango\_base.commands.ResultCode, str]**  
Add a subarray to the subarrayMembership list.

**Parameters**  
**argin** – an integer representing the subarray affiliation

**Returns**  
A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**  
(ResultCode, str)

**on()** → `Tuple[ska_tango_base.commands.ResultCode, str]`

Turn on the fsp and its subordinate devices

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**off()** → `Tuple[ska_tango_base.commands.ResultCode, str]`

Turn off the fsp and its subordinate devices

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**standby()** → `Tuple[ska_tango_base.commands.ResultCode, str]`

Put the fsp into low power standby mode

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**set\_function\_mode(*argin: str*)** → `Tuple[ska_tango_base.commands.ResultCode, str]`

Put the fsp into low power standby mode

**Parameters**

**argin** – one of ‘IDLE’, ‘CORR’, ‘PSS-BF’, ‘PST-BF’, or ‘VLBI’

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**update\_jones\_matrix(*argin: str*)** → `Tuple[ska_tango_base.commands.ResultCode, str]`

Update the FSP’s jones matrix (serialized JSON object)

**Parameters**

**argin** – the jones matrix data

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**update\_delay\_model(*argin: str*)** → `Tuple[ska_tango_base.commands.ResultCode, str]`

Update the FSP’s delay model (serialized JSON object)

**Parameters**

**argin** – the delay model data

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**update\_timing\_beam\_weights(argin: str) → Tuple[ska\_tango\_base.commands.ResultCode, str]**

Update the FSP's timing beam weights (serialized JSON object)

**Parameters**

**argin** – the timing beam weight data

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**get\_fsp\_corr\_config\_id() → str**

Get the configID for all the fspCorrSubarray

**Returns**

the configID

**Return type**

str

### 6.4.3 FspCorrSubarray Class

**class ska\_mid\_cbf\_mcs.fsp.fsp\_corr\_subarray\_device.FspCorrSubarray(\*args: Any, \*\*kwargs: Any)**

Bases: CspSubElement0bsDevice

FspCorrSubarray TANGO device class for the FspCorrSubarray prototype

**init\_command\_objects() → None**

Sets up the command objects

**class InitCommand(\*args: Any, \*\*kwargs: Any)**

Bases: InitCommand

A class for the FspCorrSubarray's init\_device() "command".

**do() → Tuple[ska\_tango\_base.commands.ResultCode, str]**

Stateless hook for device initialisation.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**always\_executed\_hook() → None**

Hook to be executed before any commands.

**create\_component\_manager() → FspCorrSubarrayComponentManager**

Create and return a component manager for this device.

**Returns**

a component manager for this device.

**delete\_device()** → `None`

Hook to delete device.

**read\_receptors()** → `List[int]`

Read the receptors attribute.

**Returns**

the list of receptors

**Return type**

`List[int]`

**read\_frequencyBand()** → `tango.DevEnum`

Read the frequencyBand attribute.

**Returns**

the frequency band

**Return type**

`tango.DevEnum`

**read\_band5Tuning()** → `List[float]`

Read the band5Tuning attribute.

**Returns**

the band5Tuning attribute (array of float, first element corresponds to the first stream, second to the second stream).

**Return type**

`List[float]`

**read\_frequencyBandOffsetStream1()** → `int`

Read the frequencyBandOffsetStream1 attribute.

**Returns**

the frequencyBandOffsetStream1 attribute

**Return type**

`int`

**read\_frequencyBandOffsetStream2()** → `int`

Read the frequencyBandOffsetStream2 attribute.

**Returns**

the frequencyBandOffsetStream2 attribute.

**Return type**

`int`

**read\_frequencySliceID()** → `int`

Read the frequencySliceID attribute.

**Returns**

the frequencySliceID attribute.

**Return type**

`int`

**read\_corrBandwidth()** → int

Read the corrBandwidth attribute.

**Returns**

the corrBandwidth attribute (bandwidth to be correlated is <Full Bandwidth>/2^bandwidth).

**Return type**

int

**read\_zoomWindowTuning()** → int

Read the zoomWindowTuning attribute.

**Returns**

the zoomWindowTuning attribute

**Return type**

int

**read\_integrationFactor()** → int

Read the integrationFactor attribute.

**Returns**

the integrationFactor attribute (millisecond).

**Return type**

int

**read\_channelAveragingMap()** → List[List[int]]

Read the channelAveragingMap attribute.

**Returns**

the channelAveragingMap attribute. Consists of 2\*20 array of integers(20 tuples representing 20\* 744 channels). The first element is the ID of the first channel in a channel group. The second element is the averaging factor

**Return type**

List[List[int]]

**read\_visDestinationAddress()** → str

Read the visDestinationAddress attribute.

**Returns**

the visDestinationAddress attribute. (JSON object containing info about current SDP destination addresses being used).

**Return type**

str

**write\_visDestinationAddress(value: str)** → None

Write the visDestinationAddress attribute.

**Parameters**

**value** – the visDestinationAddress attribute value. (JSON object containing info about current SDP destination addresses being used).

**read\_fspChannelOffset()** → int

Read the fspChannelOffset attribute.

**Returns**

the fspChannelOffset attribute.

**Return type**

int

**write\_fspChannelOffset**(*value*: int) → None

Write the fspChannelOffset attribute.

**Parameters**

**value** – the fspChannelOffset attribute value.

**read\_outputLinkMap**() → List[List[int]]

Read the outputLinkMap attribute.

**Returns**

the outputLinkMap attribute.

**Return type**

List[List[int]]

**write\_outputLinkMap**(*value*: List[List[int]]) → None

Write the outputLinkMap attribute.

**Parameters**

**value** – the outputLinkMap attribute value.

**read\_scanID**() → int

Read the scanID attribute.

**Returns**

the scanID attribute.

**Return type**

int

**write\_scanID**(*value*: int) → None

Write the scanID attribute.

**Parameters**

**value** – the scanID attribute value.

**read\_configID**() → str

Read the configID attribute.

**Returns**

the configID attribute.

**Return type**

str

**write\_configID**(*value*: str) → None

Write the configID attribute.

**Parameters**

**value** – the configID attribute value.

**write\_simulationMode**(*value*: ska\_tango\_base.control\_model.SimulationMode) → None

Set the simulation mode of the device.

**Parameters**

**value** – SimulationMode

---

```
class OnCommand(*args: Any, **kwargs: Any)
    Bases: OnCommand

    A class for the FspCorrSubarray's On() command.

    do() → Tuple[ska_tango_base.commands.ResultCode, str]
        Stateless hook for On() command functionality.

        Returns
            A tuple containing a return code and a string message indicating status. The message is for
            information purpose only.

        Return type
            (ResultCode, str)

class OffCommand(*args: Any, **kwargs: Any)
    Bases: OffCommand

    A class for the FspCorrSubarray's Off() command.

    do() → Tuple[ska_tango_base.commands.ResultCode, str]
        Stateless hook for Off() command functionality.

        Returns
            A tuple containing a return code and a string message indicating status. The message is for
            information purpose only.

        Return type
            (ResultCode, str)

class StandbyCommand(*args: Any, **kwargs: Any)
    Bases: StandbyCommand

    A class for the FspCorrSubarray's Standby() command.

    do() → Tuple[ska_tango_base.commands.ResultCode, str]
        Stateless hook for Standby() command functionality.

        Returns
            A tuple containing a return code and a string message indicating status. The message is for
            information purpose only.

        Return type
            (ResultCode, str)

class ConfigureScanCommand(*args: Any, **kwargs: Any)
    Bases: ConfigureScanCommand

    A class for the FspCorrSubarray's ConfigureScan() command.

    do(argin: str) → Tuple[ska_tango_base.commands.ResultCode, str]
        Stateless hook for ConfigureScan() command functionality.

        Parameters
            argin (str) – The configuration as JSON formatted string

        Returns
            A tuple containing a return code and a string message indicating status. The message is for
            information purpose only.

        Return type
            (ResultCode, str)

        Raises
            CommandError if the configuration data validation fails.

    validate_input(argin: str) → Tuple[bool, str]
        Validate the configuration parameters against allowed values, as needed.
```

**Parameters**

**argin** – The JSON formatted string with configuration for the device. :type argin: ‘De-  
vString’

**Returns**

A tuple containing a boolean and a string message.

**Return type**

(bool, str)

**class ScanCommand(\*args: Any, \*\*kwargs: Any)**

Bases: ScanCommand

A class for the FspCorrSubarrFspCorrSubarrayay’s Scan() command.

**do(argin: str) → Tuple[ska\_tango\_base.commands.ResultCode, str]**

Stateless hook for Scan() command functionality.

**Parameters**

**argin (str)** – The scan ID

**Returns**

A tuple containing a return code and a string message indicating status. The message is for  
information purpose only.

**Return type**

(ResultCode, str)

**Raises**

CommandError if the configuration data validation fails.

**class EndScanCommand(\*args: Any, \*\*kwargs: Any)**

Bases: EndScanCommand

A class for the FspCorrSubarray’s Scan() command.

**do() → Tuple[ska\_tango\_base.commands.ResultCode, str]**

Stateless hook for Scan() command functionality.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for  
information purpose only.

**Return type**

(ResultCode, str)

**Raises**

CommandError if the configuration data validation fails.

**class GoToIdleCommand(\*args: Any, \*\*kwargs: Any)**

Bases: GoToIdleCommand

A class for the FspCorrSubarray’s GoToIdle command.

**do() → Tuple[ska\_tango\_base.commands.ResultCode, str]**

Stateless hook for GoToIdle() command functionality.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for  
information purpose only.

**Return type**

(ResultCode, str)

**is\_getLinkAndAddress\_allowed() → bool**

Determine if getLinkAndAddress is allowed (allowed if destination addresses are received, meaning out-  
putLinkMap also received (checked in subarray validate scan)).

---

**Returns**  
if getLinkAndAddress is allowed

**Return type**  
`bool`

**getLinkAndAddress(`argin: int`) → str**  
Get output link and destination addresses in JSON based on a channel ID.

**Parameters**  
`argin` – the channel id.

**Returns**  
the output link and destination addresses in JSON.

**Return type**  
`str`

#### 6.4.4 FspCorrSubarrayComponentManager Class

```
class ska_mid_cbm_mcs.fsp.fsp_corr_subarray_component_manager.FspCorrSubarrayComponentManager(*args:  
    Any,  
    **kwargs:  
    Any)
```

Bases: `CbfComponentManager`, `CspObsComponentManager`

A component manager for the FspCorrSubarray device.

**property frequency\_band: tango.DevEnum**

Frequency Band

**Returns**  
the frequency band

**Return type**  
`tango.DevEnum`

**property stream\_tuning: List[float]**

Band 5 Tuning

**Returns**  
an array of float, (first element corresponds to the first stream, second to the second stream).

**Return type**  
`List[float]`

**property frequency\_band\_offset\_stream\_1: int**

Frequency Band Offset Stream 1

**Returns**  
the frequency band offset for stream 1

**Return type**  
`int`

**property frequency\_band\_offset\_stream\_2: int**

Frequency Band Offset Stream 2

**Returns**  
the frequency band offset for stream 2

**Return type**  
int

**property frequency\_slice\_id: int**  
Frequency Slice ID

**Returns**  
the frequency slice id

**Return type**  
int

**property bandwidth: int**  
Bandwidth

**Returns**  
the corr bandwidth (bandwidth to be correlated is <Full Bandwidth>/2^bandwidth).

**Return type**  
int

**property integration\_factor: int**  
Integration Factor

**Returns**  
the integration factor

**Return type**  
int

**property fsp\_channel\_offset: int**  
FSP Channel Offset

**Returns**  
the FSP channel offset

**Return type**  
int

**property vis\_destination\_address: str**  
VIS Destination Address

**Returns**  
JSON string containing info about current SDP destination addresses being used

**Return type**  
str

**property output\_link\_map: List[List[int]]**  
Output Link Map

**Returns**  
the output link map

**Return type**  
List[List[int]]

**property channel\_averaging\_map: List[List[int]]**  
Channel Averaging Map

**Returns**  
the channel averaging map. Consists of 2\*20 array of integers(20 tuples representing 20\*

744 channels). The first element is the ID of the first channel in a channel group. The second element is the averaging factor

**Return type**

List[List[int]]

**property zoom\_window\_tuning: int**

Zoom Window Tuning

**Returns**

the zoom window tuning

**Return type**

int

**property config\_id: str**

Config ID

**Returns**

the config id

**Return type**

str

**property scan\_id: int**

Scan ID

**Returns**

the scan id

**Return type**

int

**property receptors: List[int]**

Receptors

**Returns**

list of receptor ids

**Return type**

List[int]

**property simulation\_mode: ska\_tango\_base.control\_model.SimulationMode**

Get the simulation mode of the component manager.

**Returns**

simulation mode of the component manager

**start\_communicating() → None**

Establish communication with the component, then start monitoring.

**stop\_communicating() → None**

Stop communication with the component

**configure\_scan(configuration: str) → Tuple[ska\_tango\_base.commands.ResultCode, str]**

Performs the ConfigureScan() command functionality

**Parameters**

**configuration** – The configuration as JSON formatted string

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**scan**(*scan\_id*: int) → Tuple[ska\_tango\_base.commands.ResultCode, str]

Performs the Scan() command functionality

**Parameters**

**scan\_id** – The scan id

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**end\_scan**() → Tuple[ska\_tango\_base.commands.ResultCode, str]

Performs the EndScan() command functionality

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**go\_to\_idle**() → Tuple[ska\_tango\_base.commands.ResultCode, str]

Performs the GoToIdle() command functionality

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

## 6.4.5 FspPssSubarray Class

**class** ska\_mid\_cbf\_mcs.fsp.fsp\_pss\_subarray\_device.FspPssSubarray(\*args: Any, \*\*kwargs: Any)

Bases: CspSubElementObsDevice

FspPssSubarray TANGO device class for the FspPssSubarray prototype

**init\_command\_objects**() → None

Sets up the command objects

**class** InitCommand(\*args: Any, \*\*kwargs: Any)

Bases: InitCommand

A class for the FspPssSubarray's init\_device() "command".

**do**() → Tuple[ska\_tango\_base.commands.ResultCode, str]

Stateless hook for device initialisation.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**always\_executed\_hook()** → None

Hook to be executed before any commands.

**create\_component\_manager()** → *FspPssSubarrayComponentManager*

Create and return a component manager for this device.

**Returns**

a component manager for this device.

**delete\_device()** → None

Hook to delete device.

**read\_receptors()** → List[int]

Read the receptors attribute.

**Returns**

the receptors attribute.

**Return type**

List[int]

**read\_searchBeams()** → List[str]

Read the searchBeams attribute.

**Returns**

the searchBeams attribute.

**Return type**

List[str]

**read\_searchBeamID()** → List[int]

Read the searchBeamID attribute.

**Returns**

the searchBeamID attribute.

**Return type**

List[int]

**read\_searchWindowID()** → List[int]

Read the searchWindowID attribute.

**Returns**

the searchWindowID attribute.

**Return type**

List[int]

**read\_outputEnable()** → bool

Read the outputEnable attribute. Used to enable/disable transmission of the output products.

**Returns**

the outputEnable attribute.

**Return type**

bool

**read\_scanID()** → int

Read the scanID attribute.

**Returns**

the scanID attribute.

**Return type**

int

**write\_scanID(value: int)** → None

Write the scanID attribute.

**Parameters**

**value** – the scanID attribute value.

**read\_configID()** → str

Read the configID attribute.

**Returns**

the configID attribute.

**Return type**

str

**write\_configID(value: str)** → None

Write the configID attribute.

**Parameters**

**value** – the configID attribute value.

**class OnCommand(\*args: Any, \*\*kwargs: Any)**

Bases: OnCommand

A class for the FspPssSubarray's On() command.

**do()** → Tuple[ska\_tango\_base.commands.ResultCode, str]

Stateless hook for On() command functionality.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**class OffCommand(\*args: Any, \*\*kwargs: Any)**

Bases: OffCommand

A class for the FspPssSubarray's Off() command.

**do()** → Tuple[ska\_tango\_base.commands.ResultCode, str]

Stateless hook for Off() command functionality.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**class StandbyCommand(\*args: Any, \*\*kwargs: Any)**

Bases: StandbyCommand

A class for the FspPssSubarray's Standby() command.

---

**do()** → `Tuple[ska_tango_base.commands.ResultCode, str]`

Stateless hook for Standby() command functionality.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

`(ResultCode, str)`

**class ConfigureScanCommand(\*args: Any, \*\*kwargs: Any)**

Bases: `ConfigureScanCommand`

A class for the FspPssSubarray's ConfigureScan() command.

**do(argin: str)** → `Tuple[ska_tango_base.commands.ResultCode, str]`

Stateless hook for ConfigureScan() command functionality.

**Parameters**

`argin (str)` – The configuration as JSON formatted string.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

`(ResultCode, str)`

**Raises**

`CommandError` if the configuration data validation fails.

**validate\_input(argin: str)** → `Tuple[bool, str]`

Validate the configuration parameters against allowed values, as needed.

**Parameters**

`argin` – The JSON formatted string with configuration for the device. :type argin: ‘DeviceString’

**Returns**

A tuple containing a boolean and a string message.

**Return type**

`(bool, str)`

**class ScanCommand(\*args: Any, \*\*kwargs: Any)**

Bases: `ScanCommand`

A class for the FspPssSubarray's Scan() command.

**do(argin: str)** → `Tuple[ska_tango_base.commands.ResultCode, str]`

Stateless hook for Scan() command functionality.

**Parameters**

`argin (str)` – The scan ID

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

`(ResultCode, str)`

**Raises**

`CommandError` if the configuration data validation fails.

**class EndScanCommand(\*args: Any, \*\*kwargs: Any)**

Bases: `EndScanCommand`

A class for the FspPssSubarray's Scan() command.

`do()` → `Tuple[ska_tango_base.commands.ResultCode, str]`

Stateless hook for Scan() command functionality.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

`(ResultCode, str)`

**Raises**

`CommandError` if the configuration data validation fails.

`class GoToIdleCommand(*args: Any, **kwargs: Any)`

Bases: `GoToIdleCommand`

A class for the FspPssSubarray's GoToIdle command.

`do()` → `Tuple[ska_tango_base.commands.ResultCode, str]`

Stateless hook for GoToIdle() command functionality.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

`(ResultCode, str)`

## 6.4.6 FspPssSubarrayComponentManager Class

`class ska_mid_cbm_mcs.fsp.fsp_pss_subarray_component_manager.FspPssSubarrayComponentManager(*args: Any, **kwargs: Any)`

Bases: `CbfComponentManager`, `CspObsComponentManager`

A component manager for the FspPssSubarray device.

`property scan_id: int`

Scan ID

**Returns**

the scan id

**Return type**

`int`

`property config_id: str`

Config ID

**Returns**

the config id

**Return type**

`str`

`property fsp_id: int`

Fsp ID

**Returns**

the fsp id

---

**Return type**  
int

**property** `search_window_id: int`  
Search Window ID

**Returns**  
the search window id

**Return type**  
int

**property** `search_beams: List[str]`  
Search Beams

**Returns**  
search beams

**Return type**  
List[str]

**property** `search_beam_id: List[int]`  
Search Beam ID

**Returns**  
search beam id

**Return type**  
List[int]

**property** `output_enable: bool`  
Output Enable

**Returns**  
output enable

**Return type**  
bool

**property** `receptors: List[int]`  
Receptors

**Returns**  
list of receptor ids

**Return type**  
List[int]

**start\_communicating()** → None  
Establish communication with the component, then start monitoring.

**stop\_communicating()** → None  
Stop communication with the component

**configure\_scan(configuration: str)** → Tuple[ska\_tango\_base.commands.ResultCode, str]  
Performs the ConfigureScan() command functionality

**Parameters**  
`configuration` – The configuration as JSON formatted string

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**scan**(*scan\_id*: int) → Tuple[ska\_tango\_base.commands.ResultCode, str]

Performs the Scan() command functionality

**Parameters**

**scan\_id** – The scan id

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**end\_scan**() → Tuple[ska\_tango\_base.commands.ResultCode, str]

Performs the EndScan() command functionality

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**go\_to\_idle**() → Tuple[ska\_tango\_base.commands.ResultCode, str]

Performs the GoToIdle() command functionality

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

## 6.4.7 FspPstSubarray Class

**class** ska\_mid\_cbf\_mcs.fsp.fsp\_pst\_subarray\_device.FspPstSubarray(\*args: Any, \*\*kwargs: Any)

Bases: CspSubElementObsDevice

FspPstSubarray TANGO device class for the FspPstSubarray prototype

**init\_command\_objects**() → None

Sets up the command objects

**class** InitCommand(\*args: Any, \*\*kwargs: Any)

Bases: InitCommand

A class for the FspPstSubarray's init\_device() "command".

**do**() → Tuple[ska\_tango\_base.commands.ResultCode, str]

Stateless hook for device initialisation.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**always\_executed\_hook()** → None

Hook to be executed before any commands.

**create\_component\_manager()** → *FspPstSubarrayComponentManager*

Create and return a component manager for this device.

**Returns**

a component manager for this device.

**delete\_device()** → None

Hook to delete device.

**read\_outputEnable()** → bool

Read the outputEnable attribute. Used to enable/disable transmission of the output products.

**Returns**

the outputEnable attribute.

**Return type**

bool

**read\_receptors()** → List[int]

Read the receptors attribute.

**Returns**

the list of receptors.

**Return type**

List[int]

**write\_receptors(*value*: List[int])** → None

Write the receptors attribute.

**Parameters****value** – the receptors attribute value.**read\_timingBeams()** → List[str]

Read the timingBeams attribute.

**Returns**

the timingBeams attribute.

**Return type**

List[int]

**read\_timingBeamID()** → List[int]

Read the list of Timing Beam IDs.

**Returns**

the timingBeamID attribute.

**Return type**

List[int]

**read\_scanID()** → int

Read the scanID attribute.

**Returns**

the scanID attribute.

**Return type**`int``write_scanID(value: int) → None`

Write the scanID attribute.

**Parameters**

**value** – the scanID attribute value.

`class OnCommand(*args: Any, **kwargs: Any)`

Bases: `OnCommand`

A class for the FspPstSubarray's `On()` command.

`do() → Tuple[ska_tango_base.commands.ResultCode, str]`

Stateless hook for `On()` command functionality.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

`(ResultCode, str)`

`class OffCommand(*args: Any, **kwargs: Any)`

Bases: `OffCommand`

A class for the FspPstSubarray's `Off()` command.

`do() → Tuple[ska_tango_base.commands.ResultCode, str]`

Stateless hook for `Off()` command functionality.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

`(ResultCode, str)`

`class StandbyCommand(*args: Any, **kwargs: Any)`

Bases: `StandbyCommand`

A class for the FspPstSubarray's `Standby()` command.

`do() → Tuple[ska_tango_base.commands.ResultCode, str]`

Stateless hook for `Standby()` command functionality.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

`(ResultCode, str)`

`class ConfigureScanCommand(*args: Any, **kwargs: Any)`

Bases: `ConfigureScanCommand`

A class for the FspPstSubarray's `ConfigureScan()` command.

`do(argin: str) → Tuple[ska_tango_base.commands.ResultCode, str]`

Stateless hook for `ConfigureScan()` command functionality.

**Parameters**

**argin** (`str`) – The configuration as JSON formatted string

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**Raises**

CommandError if the configuration data validation fails.

**validate\_input**(argin: str) → Tuple[bool, str]

Validate the configuration parameters against allowed values, as needed.

**Parameters**

**argin** – The JSON formatted string with configuration for the device. :type argin: ‘DeviceString’

**Returns**

A tuple containing a boolean and a string message.

**Return type**

(bool, str)

**class ScanCommand(\*args: Any, \*\*kwargs: Any)**

Bases: ScanCommand

A class for the FspPstSubarray’s Scan() command.

**do**(argin: str) → Tuple[ska\_tango\_base.commands.ResultCode, str]

Stateless hook for Scan() command functionality.

**Parameters**

**argin** (str) – The scan ID

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**Raises**

CommandError if the configuration data validation fails.

**class EndScanCommand(\*args: Any, \*\*kwargs: Any)**

Bases: EndScanCommand

A class for the FspPstSubarray’s EndScan() command.

**do**() → Tuple[ska\_tango\_base.commands.ResultCode, str]

Stateless hook for Scan() command functionality.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**Raises**

CommandError if the configuration data validation fails.

**class GoToIdleCommand(\*args: Any, \*\*kwargs: Any)**

Bases: GoToIdleCommand

A class for the FspPstSubarray’s GoToIdle command.

**do**() → Tuple[ska\_tango\_base.commands.ResultCode, str]

Stateless hook for GoToIdle() command functionality.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

## 6.4.8 FspPstSubarrayComponentManager Class

```
class ska_mid_cbm_mcs.fsp.fsp_pst_subarray_component_manager.FspPstSubarrayComponentManager(*args:  
                                         Any,  
                                         **kwargs:  
                                         Any)
```

Bases: *CbfComponentManager*, *CspObsComponentManager*

A component manager for the FspPstSubarray device.

**property fsp\_id: int**

Fsp ID

**Returns**

the fsp id

**Return type**

int

**property timing\_beams: List[str]**

Timing Beams

**Returns**

the timing beams

**Return type**

List[str]

**property timing\_beam\_id: List[int]**

Timing Beam ID

**Returns**

list of timing beam ids

**Return type**

List[int]

**property receptors: List[int]**

Receptors

**Returns**

list of receptor ids

**Return type**

List[int]

**property scan\_id: int**

Scan ID

**Returns**

the scan id

**Return type**

int

**property output\_enable: bool**

Output Enable

**Returns**

output enable

**Return type**

bool

**start\_communicating() → None**

Establish communication with the component, then start monitoring.

**stop\_communicating() → None**

Stop communication with the component

**configure\_scan(configuration: str) → Tuple[ska\_tango\_base.commands.ResultCode, str]**

Performs the ConfigureScan() command functionality

**Parameters**

**configuration** – The configuration as JSON formatted string

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**scan(scan\_id: int) → Tuple[ska\_tango\_base.commands.ResultCode, str]**

Performs the Scan() command functionality

**Parameters**

**scan\_id** – The scan id

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**end\_scan() → Tuple[ska\_tango\_base.commands.ResultCode, str]**

Performs the EndScan() command functionality

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**go\_to\_idle() → Tuple[ska\_tango\_base.commands.ResultCode, str]**

Performs the GoToIdle() command functionality

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

## 6.5 Vcc

### 6.5.1 VCC Class

```
class ska_mid_cbm_mcs.vcc.vcc_device.Vcc(*args: Any, **kwargs: Any)
    Bases: CspSubElement0bsDevice
    Vcc TANGO device class for the prototype
    init_command_objects() → None
        Sets up the command objects
    create_component_manager() → VccComponentManager
    always_executed_hook() → None
        Hook to be executed before any commands.
    delete_device() → None
        Hook to delete device.
    write_simulationMode(value: ska_tango_base.control_model.SimulationMode) → None
        Set the simulation mode of the device.
        Parameters
            value – SimulationMode
    read_receptorID() → int
        Read the receptorID attribute.
        Returns
            the Vcc's receptor id.
        Return type
            int
    write_receptorID(value: int) → None
        Write the receptorID attribute.
        Parameters
            value – the receptorID value.
    read_subarrayMembership() → int
        Read the subarrayMembership attribute.
        Returns
            the subarray membership (0 = no affiliation).
        Return type
            int
    write_subarrayMembership(value: int) → None
        Write the subarrayMembership attribute.
        Parameters
            value – the subarray membership value (0 = no affiliation).
    read_frequencyOffsetK() → int
        Read the frequencyOffsetK attribute.
```

**Returns**

the frequency offset k-value

**Return type**

int

**write\_frequencyOffsetK**(value: int) → None

Write the frequencyOffsetK attribute.

**Parameters**

**value** – the frequency offset k-value

**read\_frequencyOffsetDeltaF**() → int

Read the frequencyOffsetDeltaF attribute.

**Returns**

the frequency offset delta-f value

**Return type**

int

**write\_frequencyOffsetDeltaF**(value: int) → None

Write the frequencyOffsetDeltaF attribute.

**Parameters**

**value** – the frequency offset delta-f value

**read\_frequencyBand**() → tango.DevEnum

Read the frequencyBand attribute.

**Returns**

the frequency band (being observed by the current scan, one of [“1”, “2”, “3”, “4”, “5a”, “5b”]).

**Return type**

tango.DevEnum

**read\_band5Tuning**() → List[float]

Read the band5Tuning attribute.

**Returns**

the band5Tuning attribute (stream tuning (GHz)).

**Return type**

list of float

**read\_frequencyBandOffsetStream1**() → int

Read the frequencyBandOffsetStream1 attribute.

**Returns**

the frequencyBandOffsetStream1 attribute.

**Return type**

int

**read\_frequencyBandOffsetStream2**() → int

Read the frequencyBandOffsetStream2 attribute.

**Returns**

the frequencyBandOffsetStream2 attribute.

**Return type**

int

**read\_dopplerPhaseCorrection()** → List[float]

Read the dopplerPhaseCorrection attribute.

**Returns**

the dopplerPhaseCorrection attribute.

**Return type**

list of float

**write\_dopplerPhaseCorrection(value: List[float])** → None

Write the dopplerPhaseCorrection attribute.

**Parameters**

**value** – the dopplerPhaseCorrection attribute value.

**read\_rfiFlaggingMask()** → str

Read the rfiFlaggingMask attribute.

**Returns**

the rfiFlaggingMask attribute.

**Return type**

str/JSON

**read\_delayModel()** → str

Read the delayModel attribute.

**Returns**

the delayModel attribute (delay model coefficients, :return: the delayModel attribute (delay model coefficients,

**Returns**

the delayModel attribute (delay model coefficients, given per frequency slice).

**Return type**

list of list of float

**read\_jonesMatrix()** → str

Read the jonesMatrix attribute.

**Returns**

the jonesMatrix attribute (jones matrix values, given per frequency slice).

**Return type**

str

**read\_scanID()** → int

Read the scanID attribute.

**Returns**

the scanID attribute.

**Return type**

int

**read\_configID()** → str

Read the configID attribute.

**Returns**

the configID attribute.

**Return type**

`str`

```
class InitCommand(*args: Any, **kwargs: Any)
```

Bases: `InitCommand`

A class for the Vcc’s init\_device() “command”.

`do()` → `Tuple[ska_tango_base.commands.ResultCode, str]`

Stateless hook for device initialisation.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

`(ResultCode, str)`

```
class OnCommand(*args: Any, **kwargs: Any)
```

Bases: `OnCommand`

A class for the Vcc’s on command.

`do()` → `Tuple[ska_tango_base.commands.ResultCode, str]`

Stateless hook for device initialisation.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

`(ResultCode, str)`

```
class OffCommand(*args: Any, **kwargs: Any)
```

Bases: `OffCommand`

A class for the Vcc’s off command.

`do()` → `Tuple[ska_tango_base.commands.ResultCode, str]`

Stateless hook for device initialisation.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

`(ResultCode, str)`

```
class StandbyCommand(*args: Any, **kwargs: Any)
```

Bases: `StandbyCommand`

A class for the Vcc’s standby command.

`do()` → `Tuple[ska_tango_base.commands.ResultCode, str]`

Stateless hook for device initialisation.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

`(ResultCode, str)`

```
class ConfigureBandCommand(*args: Any, **kwargs: Any)
    Bases: ResponseCommand
    A class for the Vcc's ConfigureBand() command.
    Turn on the corresponding band device and disable all the others.
    do(argin: str) → Tuple[ska_tango_base.commands.ResultCode, str]
        Stateless hook for ConfigureBand() command functionality.
        Parameters
            freq_band_name – the frequency band name
        Returns
            A tuple containing a return code and a string message indicating status. The message is for
            information purpose only.
        Return type
            (ResultCode, str)

class ConfigureScanCommand(*args: Any, **kwargs: Any)
    Bases: ConfigureScanCommand
    A class for the Vcc's ConfigureScan() command.
    do(argin: str) → Tuple[ska_tango_base.commands.ResultCode, str]
        Stateless hook for ConfigureScan() command functionality.
        Parameters
            argin (str) – The configuration as JSON formatted string
        Returns
            A tuple containing a return code and a string message indicating status. The message is for
            information purpose only.
        Return type
            (ResultCode, str)
        Raises
            CommandError if the configuration data validation fails.

validate_input(argin: str) → Tuple[bool, str]
    Validate the configuration parameters against allowed values, as needed.
    Parameters
        argin – The JSON formatted string with configuration for the device. :type argin: ‘De-
        vString’
    Returns
        A tuple containing a boolean and a string message.
    Return type
        (bool, str)

class ScanCommand(*args: Any, **kwargs: Any)
    Bases: ScanCommand
    A class for the Vcc's Scan() command.
    do(argin: str) → Tuple[ska_tango_base.commands.ResultCode, str]
        Stateless hook for Scan() command functionality.
        Parameters
            argin (str) – The scan ID as JSON formatted string
        Returns
            A tuple containing a return code and a string message indicating status. The message is for
            information purpose only.
        Return type
            (ResultCode, str)
```

---

```
class EndScanCommand(*args: Any, **kwargs: Any)
    Bases: EndScanCommand
    A class for the Vcc's EndScan() command.

    do() → Tuple[ska_tango_base.commands.ResultCode, str]
        Stateless hook for EndScan() command functionality.

        Returns
        A tuple containing a return code and a string message indicating status. The message is for
        information purpose only.

        Return type
        (ResultCode, str)

class ObsResetCommand(*args: Any, **kwargs: Any)
    Bases: ObsResetCommand
    A class for the VCC's ObsReset command.

    do()
        Stateless hook for ObsReset() command functionality.

        Returns
        A tuple containing a return code and a string message indicating status. The message is for
        information purpose only.

        Return type
        (ResultCode, str)

class AbortCommand(*args: Any, **kwargs: Any)
    Bases: AbortCommand
    A class for the VCC's Abort command.

    do()
        Stateless hook for Abort() command functionality.

        Returns
        A tuple containing a return code and a string message indicating status. The message is for
        information purpose only.

        Return type
        (ResultCode, str)

class GoToIdleCommand(*args: Any, **kwargs: Any)
    Bases: GoToIdleCommand
    A class for the Vcc's GoToIdle command.

    do() → Tuple[ska_tango_base.commands.ResultCode, str]
        Stateless hook for GoToIdle() command functionality.

        Returns
        A tuple containing a return code and a string message indicating status. The message is for
        information purpose only.

        Return type
        (ResultCode, str)

class UpdateDopplerPhaseCorrectionCommand(*args: Any, **kwargs: Any)
    Bases: BaseCommand
    A class for the Vcc's UpdateDopplerPhaseCorrection() command.

    Update Vcc's doppler phase correction.
```

**is\_allowed()** → `bool`

Determine if UpdateDopplerPhaseCorrection is allowed (allowed when Devstate is ON and ObsState is READY OR SCANNING).

**Returns**

if UpdateDopplerPhaseCorrection is allowed

**Return type**

`bool`

**do(argin: str)** → `None`

Stateless hook for UpdateDopplerPhaseCorrection() command functionality.

**Parameters**

`argin` – the doppler phase correction JSON

**class UpdateDelayModelCommand(\*args: Any, \*\*kwargs: Any)**

Bases: `BaseCommand`

A class for the Vcc’s UpdateDelayModel() command.

Update Vcc’s delay model.

**is\_allowed()** → `bool`

Determine if UpdateDelayModel is allowed (allowed when Devstate is ON and ObsState is READY OR SCANNING).

**Returns**

if UpdateDelayModel is allowed

**Return type**

`bool`

**do(argin: str)** → `None`

Stateless hook for UpdateDelayModel() command functionality.

**Parameters**

`argin` – the delay model JSON

**class UpdateJonesMatrixCommand(\*args: Any, \*\*kwargs: Any)**

Bases: `BaseCommand`

A class for the Vcc’s UpdateJonesMatrix() command.

Update Vcc’s Jones matrix.

**is\_allowed()** → `bool`

Determine if UpdateJonesMatrix is allowed (allowed when Devstate is ON and ObsState is READY OR SCANNING).

**Returns**

if UpdateJonesMatrix is allowed

**Return type**

`bool`

**do(argin: str)** → `None`

Stateless hook for UpdateJonesMatrix() command functionality.

**Parameters**

`argin` – the Jones Matrix JSON

**class ConfigureSearchWindowCommand(\*args: Any, \*\*kwargs: Any)**

Bases: `ResponseCommand`

A class for the Vcc’s ConfigureSearchWindow() command.

Configure a search window by sending parameters from the input(JSON) to SearchWindow device. This function is called by the subarray after the configuration has already been validated.

#### `is_allowed() → bool`

Determine if ConfigureSearchWindow is allowed (allowed if DevState is ON and ObsState is CONFIGURING)

##### **Returns**

if ConfigureSearchWindow is allowed

##### **Return type**

`bool`

#### `validate_input(argin: str) → Tuple[bool, str]`

Validate a search window configuration

##### **Parameters**

`argin` – JSON object with the search window parameters

#### `do(argin: str) → Tuple[ska_tango_base.commands.ResultCode, str]`

Stateless hook for ConfigureSearchWindow() command functionality.

##### **Parameters**

`argin` – JSON object with the search window parameters

##### **Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

##### **Return type**

`(ResultCode, str)`

## 6.5.2 VccComponentManager Class

```
class ska_mid_cbf_mcs.vcc.vcc_component_manager.VccComponentManager(*args: Any, **kwargs: Any)
```

Bases: `CbfComponentManager`, `CspObsComponentManager`

Component manager for Vcc class.

#### `property config_id: str`

Configuration ID

##### **Returns**

the configuration ID

#### `property scan_id: int`

Scan ID

##### **Returns**

the scan ID

#### `property receptor_id: int`

Receptor ID

##### **Returns**

the receptor ID

#### `property frequency_offset_k: int`

Frequency Offset K-value for this receptor

##### **Returns**

the frequency offset k-value

```
property frequency_offset_delta_f: int
    Frequency Offset Delta-F Value for this receptor
    Returns
        the frequency offset delta-f value

property frequency_band: int
    Frequency Band
    Returns
        the frequency band as the integer index in an array of frequency band labels: ["1", "2", "3", "4", "5a", "5b"]

property stream_tuning: List[float]
    Band 5 Stream Tuning
    Returns
        the band 5 stream tuning

property frequency_band_offset_stream_1: int
    Frequency Band Offset Stream 1
    Returns
        the frequency band offset for stream 1

property frequency_band_offset_stream_2: int
    Frequency Band Offset Stream 2
    Returns
        the frequency band offset for stream 2, this is only use when band 5 is active

property rfi_flagging_mask: str
    RFI Flagging Mask
    Returns
        the RFI flagging mask

property jones_matrix: str
    Jones Matrix
    Returns
        the last received Jones matrix

property delay_model: str
    Delay Model
    Returns
        the last received delay model

property doppler_phase_correction: List[float]
    Doppler Phase Correction
    Returns
        the last received Doppler phase correction array

property simulation_mode: ska_tango_base.control_model.SimulationMode
    Get the simulation mode of the component manager.
    Returns
        simulation mode of the component manager
```

**start\_communicating()** → None

Establish communication with the component, then start monitoring.

**stop\_communicating()** → None

Stop communication with the component.

**on()** → Tuple[ska\_tango\_base.commands.ResultCode, str]

Turn on VCC component. This attempts to establish communication with the VCC devices on the HPS.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**Raises**

**ConnectionError** – if unable to connect to HPS VCC devices

**off()** → Tuple[ska\_tango\_base.commands.ResultCode, str]

Turn off VCC component; currently unimplemented.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**standby()** → Tuple[ska\_tango\_base.commands.ResultCode, str]

Turn VCC component to standby; currently unimplemented.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**configure\_band(freq\_band\_name: str)** → Tuple[ska\_tango\_base.commands.ResultCode, str]

Configure the corresponding band. At the HPS level, this reconfigures the FPGA to the correct bitstream and enables the respective band device. All other band devices are disabled.

**Parameters**

**freq\_band\_name** – the frequency band name

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**deconfigure()** → None

Deconfigure scan configuration parameters.

**configure\_scan(argin: str)** → Tuple[ska\_tango\_base.commands.ResultCode, str]

Execute configure scan operation.

**Parameters**

**argin** – JSON string with the configure scan parameters

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**scan**(*scan\_id*: int) → Tuple[ska\_tango\_base.commands.ResultCode, str]

Begin scan operation.

**Parameters**

**argin** – scan ID integer

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**end\_scan()** → Tuple[ska\_tango\_base.commands.ResultCode, str]

End scan operation.

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**abort()**

Tell the current VCC band device to abort whatever it was doing.

**obsreset()**

Reset the configuration.

**configure\_search\_window**(*argin*: str) → Tuple[ska\_tango\_base.commands.ResultCode, str]

Configure a search window by sending parameters from the input(JSON) to SearchWindow self. This function is called by the subarray after the configuration has already been validated, so the checks here have been removed to reduce overhead.

**Parameters**

**argin** – JSON string with the search window parameters

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(ResultCode, str)

**update\_doppler\_phase\_correction**(*argin*: str) → None

Update Vcc's doppler phase correction

**Parameters**

**argin** – the doppler phase correction JSON string

**update\_delay\_model**(*argin*: str) → None

Update Vcc's delay model

**Parameters**

**argin** – the delay model JSON string

**update\_jones\_matrix**(*argin: str*) → *None*

Update Vcc's jones matrix

**Parameters**

**argin** – the jones matrix JSON string

## 6.6 PowerSwitch

### 6.6.1 PowerSwitch Device

**class** *ska\_mid\_cbf\_mcs.power\_switch.power\_switch\_device.PowerSwitch(\*args: Any, \*\*kwargs: Any)*

Bases: *SKABaseDevice*

TANGO device class for controlling and monitoring the web power switch that distributes power to the Talon LRUs.

**always\_executed\_hook()** → *None*

Hook to be executed before any attribute access or command.

**delete\_device()** → *None*

Uninitialize the device.

**create\_component\_manager()** → *PowerSwitchComponentManager*

Create and return a component manager for this device.

**Returns**

a component manager for this device

**init\_command\_objects()** → *None*

Sets up the command objects.

**write\_simulationMode**(*value: ska\_tango\_base.control\_model.SimulationMode*) → *None*

Set the simulation mode of the device. When simulation mode is set to True, the power switch software simulator is used in place of the hardware. When simulation mode is set to False, the real power switch driver is used.

**Parameters**

**value** – *SimulationMode*

**read\_numOutlets()** → *int*

Get the number of outlets.

**Returns**

number of outlets

**read\_isCommunicating()** → *bool*

Get whether or not the power switch is communicating.

**Returns**

True if power switch can be contacted, False if not

```
class InitCommand(*args: Any, **kwargs: Any)
    Bases: InitCommand
    A class for the PowerSwitch's init_device() "command".
    do() → Tuple[ska_tango_base.commands.ResultCode, str]
        Stateless hook for device initialisation.
        Returns
            A tuple containing a return code and a string message indicating status. The message is for
            information purpose only.
class TurnOnOutletCommand(*args: Any, **kwargs: Any)
    Bases: ResponseCommand
    The command class for the TurnOnOutlet command.
    Turn on an individual outlet, specified by the outlet ID
    do(argin: str) → Tuple[ska_tango_base.commands.ResultCode, str]
        Implement TurnOnOutlet command functionality.
        Parameters
            argin – the outlet ID of the outlet to switch on
        Returns
            A tuple containing a return code and a string message indicating status. The message is for
            information purpose only.
class TurnOffOutletCommand(*args: Any, **kwargs: Any)
    Bases: ResponseCommand
    The command class for the TurnOffOutlet command.
    Turn off an individual outlet, specified by the outlet ID.
    do(argin: str) → Tuple[ska_tango_base.commands.ResultCode, str]
        Implement TurnOffOutlet command functionality.
        Parameters
            argin – the outlet ID of the outlet to switch off
        Returns
            A tuple containing a return code and a string message indicating status. The message is for
            information purpose only.
class GetOutletPowerModeCommand(*args: Any, **kwargs: Any)
    Bases: BaseCommand
    The command class for the GetOutletPowerMode command.
    Get the power mode of an individual outlet, specified by the outlet ID.
    do(argin: str) → ska_tango_base.control_model.PowerMode
        Implement GetOutletPowerMode command functionality.
        Parameters
            argin – the outlet ID to get the state of
        Returns
            power mode of the outlet
```

## 6.6.2 PowerSwitchComponentManager Class

```
class ska_mid_cbf_mcs.power_switch.power_switch_component_manager.PowerSwitchComponentManager(*args:  
    Any,  
    **kwargs:  
    Any)
```

Bases: *CbfComponentManager*

A component manager for the DLI web power switch. Calls either the power switch driver or the power switch simulator based on the value of simulation mode.

### Parameters

- **simulation\_mode** – simulation mode identifies if the real power switch driver or the simulator should be used
- **protocol** – Connection protocol (HTTP or HTTPS) for the power switch
- **ip** – IP address of the power switch
- **login** – Login username of the power switch
- **password** – Login password for the power switch
- **content\_type** – The content type in the request header
- **outlet\_list\_url** – A portion of the URL to get the list of outlets
- **outlet\_state\_url** – A portion of the URL to get the outlet state
- **outlet\_control\_url** – A portion of the URL to turn on/off outlet
- **turn\_on\_action** – value to pass to request to turn on an outlet
- **turn\_off\_action** – value to pass to request to turn off an outlet
- **state\_on** – value of the outlet's state when on
- **state\_off** – value of the outlet's state when off
- **outlet\_schema\_file** – File name for the schema for a list of outlets
- **outlet\_id\_list** – List of Outlet IDs
- **logger** – a logger for this object to use

**property num\_outlets: int**

Get number of outlets present in this power switch.

### Returns

number of outlets

**property is\_communicating: bool**

Returns whether or not the power switch can be communicated with.

### Returns

whether the power switch is communicating

**property simulation\_mode: ska\_tango\_base.control\_model.SimulationMode**

Get the simulation mode of the component manager.

### Returns

simulation mode of the component manager

**start\_communicating()** → `None`

Perform any setup needed for communicating with the power switch.

**stop\_communicating()** → `None`

Stop communication with the component.

**get\_outlet\_power\_mode(*outlet: str*)** → `ska_tango_base.control_model.PowerMode`

Get the power mode of a specific outlet.

**Parameters**

**outlet** – outlet ID

**Returns**

power mode of the outlet

**Raises**

`AssertionError` – if outlet ID is out of bounds

**turn\_on\_outlet(*outlet: str*)** → `Tuple[ska_tango_base.commands.ResultCode, str]`

Tell the DLI power switch to turn on a specific outlet.

**Parameters**

**outlet** – outlet ID to turn on

**Returns**

a tuple containing a return code and a string message indicating status

**Raises**

`AssertionError` – if outlet ID is out of bounds

**turn\_off\_outlet(*outlet: str*)** → `Tuple[ska_tango_base.commands.ResultCode, str]`

Tell the DLI power switch to turn off a specific outlet.

**Parameters**

**outlet** – outlet ID to turn off

**Returns**

a tuple containing a return code and a string message indicating status

**Raises**

`AssertionError` – if outlet ID is out of bounds

### 6.6.3 PowerSwitchDriver

```
class ska_mid_cbf_mcs.power_switch.power_switch_driver.PowerSwitchDriver(protocol: str, ip: str,  
login: str, password: str, content_type: str,  
outlet_list_url: str, outlet_state_url: str,  
outlet_control_url: str, turn_on_action: str,  
turn_off_action: str, state_on: str,  
state_off: str, outlet_schema_file: str,  
outlet_id_list: List[str], logger: Logger)
```

Bases: `object`

A driver for the DLI web power switch.

#### Parameters

- **protocol** – Connection protocol (HTTP or HTTPS) for the power switch
- **ip** – IP address of the power switch
- **login** – Login username of the power switch
- **password** – Login password for the power switch
- **content\_type** – The content type in the request header
- **outlet\_list\_url** – A portion of the URL to get the list of outlets
- **outlet\_state\_url** – A portion of the URL to get the outlet state
- **outlet\_control\_url** – A portion of the URL to turn on/off outlet
- **turn\_on\_action** – value to pass to request to turn on an outlet
- **turn\_off\_action** – value to pass to request to turn off an outlet
- **state\_on** – value of the outlet's state when on
- **state\_off** – value of the outlet's state when off
- **outlet\_schema\_file** – File name for the schema for a list of outlets
- **outlet\_id\_list** – List of Outlet IDs
- **logger** – a logger for this object to use

`query_timeout_s = 6`

Timeout in seconds used when waiting for a reply from the power switch

`initialize() → None`

Initializes any variables needed for further communication with the power switch. Should be called once before any of the other methods.

`property num_outlets: int`

Get number of outlets present in this power switch.

#### Returns

number of outlets

`property is.communicating: bool`

Returns whether or not the power switch can be communicated with.

#### Returns

whether the power switch is communicating

`get_outlet_power_mode(outlet: str) → ska_tango_base.control_model.PowerMode`

Get the power mode of a specific outlet.

#### Parameters

**outlet** – outlet ID

#### Returns

power mode of the outlet

#### Raises

- **AssertionError** – if outlet ID is out of bounds
- **AssertionError** – if outlet power mode is different than expected

**turn\_on\_outlet**(outlet: str) → tuple[resultCode, str]

Tell the DLI power switch to turn on a specific outlet.

**Parameters**

outlet – outlet ID to turn on

**Returns**

a tuple containing a return code and a string message indicating status

**Raises**

**AssertionError** – if outlet ID is out of bounds

**turn\_off\_outlet**(outlet: str) → tuple[resultCode, str]

Tell the DLI power switch to turn off a specific outlet.

**Parameters**

outlet – outlet ID to turn off

**Returns**

a tuple containing a return code and a string message indicating status

**Raises**

**AssertionError** – if outlet ID is out of bounds

**get\_outlet\_list()**

Query the power switch for a list of outlets and get their name and current state.

**Returns**

list of all the outlets available in this power switch, or an empty list if there was an error

## 6.6.4 PowerSwitchSimulator

```
class ska_mid_cbf_mcs.power_switch.power_switch_simulator.PowerSwitchSimulator(outlet_id_list:  
    List[str],  
    logger:  
        Logger)
```

Bases: `object`

A simulator for the power switch.

**Parameters**

logger – a logger for this object to use

**property num\_outlets: int**

Get number of outlets present in this power switch.

**Returns**

number of outlets

**property is\_communicating: bool**

Returns whether or not the power switch can be communicated with.

**Returns**

simulator always returns True

**get\_outlet\_power\_mode(*outlet: str*) → ska\_tango\_base.control\_model.PowerMode**

Get the power mode of a specific outlet.

**Parameters**

**outlet** – outlet ID

**Returns**

power mode of the outlet

**Raises**

**AssertionError** – if outlet ID is out of bounds

**turn\_on\_outlet(*outlet: str*) → tuple[ResultCode, str]**

Turn on a specific outlet.

**Parameters**

**outlet** – outlet ID to turn on

**Returns**

a tuple containing a return code and a string message indicating status

**Raises**

**AssertionError** – if outlet ID is out of bounds

**turn\_off\_outlet(*outlet: str*) → tuple[ResultCode, str]**

Turn off a specific outlet.

**Parameters**

**outlet** – outlet ID to turn off

**Returns**

a tuple containing a return code and a string message indicating status

**Raises**

**AssertionError** – if outlet ID is out of bounds

**get\_outlet\_list()**

Returns a list of 8 outlets, containing their name and current state. The current state is always set to OFF.

**Returns**

list of all the outlets available in this power switch

## 6.7 TalonLRU

### 6.7.1 TalonLRU Device

**class ska\_mid\_cbf\_mcs.talon\_lru.talon\_lru\_device.TalonLRU(\*args: Any, \*\*kwargs: Any)**

Bases: SKABaseDevice

TANGO device class for controlling and monitoring a Talon LRU.

**always\_executed\_hook() → None**

Hook to be executed before any attribute access or command.

**delete\_device() → None**

Uninitialize the device.

**init\_command\_objects()** → `None`

Sets up the command objects.

**read\_PDU1PowerMode()** → `ska_tango_base.control_model.PowerMode`

Read the power mode of the outlet specified by PDU 1.

**Returns**

Power mode of PDU 1

**read\_PDU2PowerMode()** → `ska_tango_base.control_model.PowerMode`

Read the power mode of the outlet specified by PDU 2.

**Returns**

Power mode of PDU 2

**create\_component\_manager()** → *TalonLRUComponentManager*

Create and return a component manager for this device.

**Returns**

a component manager for this device.

**class InitCommand(\*args: Any, \*\*kwargs: Any)**

Bases: `InitCommand`

A class for the TalonLRU's init\_device() "command".

**do()** → `Tuple[ska_tango_base.commands.ResultCode, str]`

Stateless hook for device initialisation. Creates the device proxies to the power switch devices.

**Returns**

A Tuple containing a return code and a string message indicating status. The message is for information purpose only.

**class OnCommand(\*args: Any, \*\*kwargs: Any)**

Bases: `OnCommand`

The command class for the On command.

Turn on both outlets that provide power to the LRU. Device is put into ON state if at least one outlet was successfully turned on.

**do()** → `Tuple[ska_tango_base.commands.ResultCode, str]`

Implement On command functionality.

**Returns**

A Tuple containing a return code and a string message indicating status. The message is for information purpose only.

**class OffCommand(\*args: Any, \*\*kwargs: Any)**

Bases: `OffCommand`

The command class for the Off command.

Turn off both outlets that provide power to the LRU. Device is put in the OFF state if both outlets were successfully turned off.

**do()** → `Tuple[ska_tango_base.commands.ResultCode, str]`

Implement Off command functionality.

**Returns**

A Tuple containing a return code and a string message indicating status. The message is for information purpose only.

## 6.7.2 TalonLRUComponentManager Class

```
class ska_mid_cbf_mcs.talon_lru.talon_lru_component_manager.TalonLRUComponentManager(*args:  
    Any,  
    **kwargs:  
    Any)
```

Bases: *CbfComponentManager*

A component manager for the TalonLRU device.

**start\_communicating()** → *None*

Establish communication with the component, then start monitoring.

**stop\_communicating()** → *None*

Stop communication with the component.

**get\_device\_proxy(*fqdn*: str)** → *CbfDeviceProxy | None*

Attempt to get a device proxy of the specified device.

**Parameters**

**fqdn** – FQDN of the device to connect to

**Returns**

*CbfDeviceProxy* to the device or *None* if no connection was made

**check\_power\_mode(*state*: tango.DevState)** → *None*

Get the power mode of both PDUs and check that it is consistent with the current device state.

**Parameters**

**state** – device operational state

**on()** → *Tuple[ska\_tango\_base.commands.ResultCode, str]*

Turn on the TalonLRU and its subordinate devices

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(*ResultCode*, *str*)

**off()** → *Tuple[ska\_tango\_base.commands.ResultCode, str]*

Turn off the TalonLRU and its subordinate devices

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(*ResultCode*, *str*)

**standby()** → *Tuple[ska\_tango\_base.commands.ResultCode, str]*

Turn the TalonLRU into low power standby mode

**Returns**

A tuple containing a return code and a string message indicating status. The message is for information purpose only.

**Return type**

(*ResultCode*, *str*)

## 6.8 TalonDxLogConsumer

### 6.8.1 TalonDxLogConsumer Class

```
class ska_mid_cbf_mcs.talondx_log_consumer.talondx_log_consumer_device.TalonDxLogConsumer(*args:  
                                         Any,  
                                         **kwargs:  
                                         Any)
```

Bases: SKABaseDevice

TANGO device class for consuming logs from the Tango devices run on the Talon boards, converting them to the SKA format, and outputting them via the logging framework.

#### `create_component_manager()`

Create the component manager LogComponentManager

##### **Returns**

Instance of LogComponentManager

##### **Return type**

LogComponentManager

#### `Log(log_message: List[str])`

Write the log to stdout as received from TLS

Sample log: ['1650964795495', 'ERROR', 'ska001/elt/master', 'TangoUtils::DeviceAttributeToCorbaAny() - A Message', '@7f48dcc80700 [7]']

Details of the list items here: <https://tango-controls.readthedocs.io/projects/rfc/en/latest/14/Logging.html#log-consumer>

##### **Parameters**

`log_message (List[str])` – Parts of the TLS log message

#### `SetTalonDxLogConsumerTarget(device_name: str) → None`

Add TalonDxLogConsumer as a logging target destination on device

#### `RemoveTalonDxLogConsumerTarget(device_name: str) → None`

Remove TalonDxLogConsumer as a logging target destination on device

#### `write_loggingLevel(value: ska_tango_base.control_model.LoggingLevel)`

Sets logging level for the device. Both the Python logger and the Tango logger are updated. Overrides the base class attribute to accept all log levels coming from HPS devices, but still limit the logging level of TalonDxLogConsumer logs.

##### **Parameters**

`value` – Logging level for logger

##### **Raises**

`LoggingLevelError` – for invalid value

---

CHAPTER  
**SEVEN**

---

## **INDICES AND TABLES**

- genindex
- modindex
- search



## PYTHON MODULE INDEX

### S

ska\_mid\_cbmcs.component.component\_manager,  
    27  
ska\_mid\_cbmcs.controller, 30  
ska\_mid\_cbmcs.fsp, 40  
ska\_mid\_cbmcs.power\_switch, 81  
ska\_mid\_cbmcs.power\_switch.power\_switch\_driver,  
    84  
ska\_mid\_cbmcs.power\_switch.power\_switch\_simulator,  
    86  
ska\_mid\_cbmcs.subarray, 34  
ska\_mid\_cbmcs.talon\_lru, 87  
ska\_mid\_cbmcs.talondx\_log\_consumer, 90  
ska\_mid\_cbmcs.vcc, 70



# INDEX

## Symbols

`_configure_hps_master()` *(ska\_mid\_cbf\_mcs.fsp.fsp\_device.Fsp method)*, 40  
 always\_executed\_hook() *(ska\_mid\_cbf\_mcs.controller.talon\_dx\_component\_manager.method)*, 34  
`_configure_talon_networking()` *(ska\_mid\_cbf\_mcs.controller.talon\_dx\_component\_manager.method)*, 33  
`_copy_binaries_and_bitstream()` *(ska\_mid\_cbf\_mcs.controller.talon\_dx\_component\_manager.method)*, 33  
`_create_hps_master_device_proxies()` *(ska\_mid\_cbf\_mcs.controller.talon\_dx\_component\_manager.method)*, 33  
`_secure_copy()` *(ska\_mid\_cbf\_mcs.controller.talon\_dx\_component\_manager.TalonDxComponentManager.method)*, 33  
`_setup_tango_host_file()` *(ska\_mid\_cbf\_mcs.controller.talon\_dx\_component\_manager.TalonDxComponentManager.method)*, 33  
`_start_hps_master()` *(ska\_mid\_cbf\_mcs.controller.talon\_dx\_component\_manager.TalonDxComponentManager.method)*, 33

## B

`bandwidth()` *(ska\_mid\_cbf\_mcs.fsp.fsp\_corr\_subarray\_component\_manager.FspSubarrayComponentManager.method)*, 56  
`abort()` *(ska\_mid\_cbf\_mcs.subarray.subarray\_component\_manager.VccComponentManager.method)*, 40  
`abort()` *(ska\_mid\_cbf\_mcs.vcc.vcc\_component\_manager.CbfComponentManager.method)*, 80  
`add_receptors()` *(ska\_mid\_cbf\_mcs.subarray.subarray\_components.talon\_dx\_component\_manager.method)*, 39  
`add_subarray_membership()` *(ska\_mid\_cbf\_mcs.fsp.fsp\_component\_manager.FspComponentManager.Midagbf\_mcs.controller.controller\_device).method)*, 47  
`AddSubarrayMembership()` *(ska\_mid\_cbf\_mcs.fsp.fsp\_device.Fsp method)*, 43  
`always_executed_hook()` *(ska\_mid\_cbf\_mcs.controller.controller\_device.CbfController.ska\_mid\_cbf\_mcs.controller.controller\_device).method)*, 30  
`always_executed_hook()` *(ska\_mid\_cbf\_mcs.fsp.fsp\_corr\_subarray\_device.FspCorrSubarray.ska\_mid\_cbf\_mcs.controller.controller\_device).method)*, 31  
`always_executed_hook()`

## C

`CbfController` *(class in ska\_mid\_cbf\_mcs.controller.controller\_device)*, 30  
`CbfController.InitCommand` *(class in ska\_mid\_cbf\_mcs.controller.controller\_device)*, 30  
`CbfController.OffCommand` *(class in ska\_mid\_cbf\_mcs.controller.controller\_device)*, 31  
`CbfController.OnCommand` *(class in ska\_mid\_cbf\_mcs.controller.controller\_device)*, 31

CbfController.StandbyCommand (class in *ska\_mid\_cbf\_mcs.controller.controller\_device*), 31

CbfSubarray (class in *ska\_mid\_cbf\_mcs.subarray.subarray\_device*), 34

CbfSubarray.AddReceptorsCommand (class in *ska\_mid\_cbf\_mcs.subarray.subarray\_device*), 36

CbfSubarray.ConfigureScanCommand (class in *ska\_mid\_cbf\_mcs.subarray.subarray\_device*), 36

CbfSubarray.EndScanCommand (class in *ska\_mid\_cbf\_mcs.subarray.subarray\_device*), 37

CbfSubarray.InitCommand (class in *ska\_mid\_cbf\_mcs.subarray.subarray\_device*), 34

CbfSubarray.RemoveAllReceptorsCommand (class in *ska\_mid\_cbf\_mcs.subarray.subarray\_device*), 36

CbfSubarray.RemoveReceptorsCommand (class in *ska\_mid\_cbf\_mcs.subarray.subarray\_device*), 35

CbfSubarray.ScanCommand (class in *ska\_mid\_cbf\_mcs.subarray.subarray\_device*), 37

CbfSubarrayComponentManager (class in *ska\_mid\_cbf\_mcs.subarray.subarray\_component\_manager*) (*ska\_mid\_cbf\_mcs.fsp.fsp\_pss\_subarray\_device.FspPssSubarray* method), 59

channel\_averaging\_map (*ska\_mid\_cbf\_mcs.fsp.fsp\_corr\_subarray\_component\_manager*.~~skaFspCorrSubarrayComponentManager~~.*FspPstSubarray* property), 56

check\_power\_mode() (*ska\_mid\_cbf\_mcs.talon\_lru.talon\_lru*.~~createComponentManager()~~.*PowerSwitch* method), 89

communication\_status (*ska\_mid\_cbf\_mcs.component.component\_manager*.~~createComponentManager()~~.*ComponentManager* property), 27

component\_fault\_changed() (*ska\_mid\_cbf\_mcs.component.component\_manager*.~~createComponentManager()~~.*ComponentManager* method), 28

component\_power\_mode\_changed() (*ska\_mid\_cbf\_mcs.component.component\_manager*.~~createComponentManager()~~.*ComponentManager* method), 28

config\_id (*ska\_mid\_cbf\_mcs.fsp.fsp\_corr\_subarray\_component\_manager*.~~createComponentManager()~~.*ComponentManager* property), 57

config\_id (*ska\_mid\_cbf\_mcs.fsp.fsp\_pss\_subarray\_component\_manager*.~~createComponentManager()~~.*ComponentManager* property), 62

config\_id (*ska\_mid\_cbf\_mcs.subarray.subarray\_component\_manager*.~~createComponentManager()~~.*ComponentManager* property), 37

config\_id (*ska\_mid\_cbf\_mcs.vcc.vcc\_component\_manager*.~~createComponentManager()~~.*ComponentManager* property), 77

configure\_band() (*ska\_mid\_cbf\_mcs.vcc.vcc\_component\_manager*.~~deconfigureVccComponentManager()~~.*VccComponentManager* method), 79

configure\_scan() (*ska\_mid\_cbf\_mcs.fsp.fsp\_corr\_subarray\_component\_manager*.~~configureScan()~~.*ComponentManager* method), 57

configure\_scan() (*ska\_mid\_cbf\_mcs.fsp.fsp\_pss\_subarray\_component\_manager*.~~configureScan()~~.*ComponentManager* method), 63

configure\_scan() (*ska\_mid\_cbf\_mcs.fsp.fsp\_pst\_subarray\_component\_manager*.~~configureScan()~~.*ComponentManager* method), 69

configure\_scan() (*ska\_mid\_cbf\_mcs.subarray.subarray\_component\_manager*.~~configureScan()~~.*ComponentManager* method), 39

configure\_scan() (*ska\_mid\_cbf\_mcs.vcc.vcc\_component\_manager*.~~configureScan()~~.*ComponentManager* method), 79

configure\_search\_window() (*ska\_mid\_cbf\_mcs.vcc.vcc\_component\_manager*.~~configureSearchWindow()~~.*VccComponentManager* method), 80

configure\_talons() (*ska\_mid\_cbf\_mcs.controller.talondx\_component\_manager*.~~configureTalons()~~.*TalondxComponentManager* method), 33

ControllerComponentManager (class in *ska\_mid\_cbf\_mcs.controller.controller\_component\_manager*), 32

create\_component\_manager() (*ska\_mid\_cbf\_mcs.controller.controller\_device.CbfController* method), 30

create\_component\_manager() (*ska\_mid\_cbf\_mcs.fsp.fsp\_corr\_subarray\_device.FspCorrSubarray* method), 49

create\_component\_manager() (*ska\_mid\_cbf\_mcs.fsp.fsp\_device.Fsp* method), 40

create\_component\_manager() (*ska\_mid\_cbf\_mcs.fsp.fsp\_pst\_subarray\_device.FspPstSubarray* method), 65

**D**

deconfigureVccComponentManager() (*ska\_mid\_cbf\_mcs.subarray.subarray\_component\_manager*.~~configureVccComponentManager()~~.*VccComponentManager* method), 38

deconfigureVccComponentManager() (*ska\_mid\_cbf\_mcs.vcc.vcc\_component\_manager*.~~configureVccComponentManager()~~.*VccComponentManager* method), 79

delay\_model(ska\_mid\_cbmcs.fsp.fsp\_component\_manager.property), 47

delay\_model(ska\_mid\_cbmcs.vcc.vcc\_component\_manager.property), 78

delete\_device() (ska\_mid\_cbmcs.controller.controller\_property), 30

delete\_device() (ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray\_property), 50

delete\_device() (ska\_mid\_cbmcs.fsp.fsp\_device.Fsp.method), 40

delete\_device() (ska\_mid\_cbmcs.fsp.fsp\_pss\_subarray\_property), 59

delete\_device() (ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_property), 65

delete\_device() (ska\_mid\_cbmcs.power\_switch.power\_device.Fsp.method), 81

delete\_device() (ska\_mid\_cbmcs.subarray.subarray\_property), 34

delete\_device() (ska\_mid\_cbmcs.talon\_lru.talon\_lru\_property), 87

delete\_device() (ska\_mid\_cbmcs.vcc.vcc\_device.Vcc\_property), 70

do() (ska\_mid\_cbmcs.controller.controller\_device.CbfCodeMarkerOnInitialization), 30

do() (ska\_mid\_cbmcs.controller.controller\_device.CbfCodeMarkerOffInitialization), 31

do() (ska\_mid\_cbmcs.controller.controller\_device.CbfCodeMarkerOnInitialisation), 31

do() (ska\_mid\_cbmcs.controller.controller\_device.CbfCodeMarkerStandbyConfirmation), 31

do() (ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray\_device.FspCorrSibkarayidCorrgneseSpipfSpipmstsubarray\_device.FspPstSubarray.EndScan), 53

do() (ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray\_device.FspCorrSibkarayidEndScancSpipfSpipmstsubarray\_device.FspPstSubarray.GoToScan), 54

do() (ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray\_device.FspCorrSibkarayidInitCfipfSpipmstsubarray\_device.FspPstSubarray.InitCfipfSpipmstsubarray), 54

do() (ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray\_device.FspCorrSibkarayidInitDfipfSpipmstsubarray\_device.FspPstSubarray.OffCfipfSpipmstsubarray), 49

do() (ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray\_device.FspCorrSibkarayidOffCfipfSpipmstsubarray\_device.FspPstSubarray.OnCfipfSpipmstsubarray), 53

do() (ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray\_device.FspCorrSibkarayidOnCfipfSpipmstsubarray\_device.FspPstSubarray.Scan), 53

do() (ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray\_device.FspCorrSibkarayidScanSpipfSpipmstsubarray\_device.FspPstSubarray.Standby), 54

do() (ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray\_device.FspCorrSibkarayidStandbyCpnmndswitch.power\_switch\_device.PowerSwitch), 53

do() (ska\_mid\_cbmcs.fsp.fsp\_device.Fsp.AddSubarrayMember), 43

do() (ska\_mid\_cbmcs.fsp.fsp\_device.Fsp.InitCommand), 42

do() (ska\_mid\_cbmcs.fsp.fsp\_device.Fsp.OffCommand), 42

do() (ska\_mid\_cbmcs.fsp.fsp\_device.Fsp.OnCommand), 42

do() (ska\_mid\_cbmcs.fsp.fsp\_device.Fsp.RemoveSubarrayMembership), 44

do() (ska\_mid\_cbmcs.fsp.fsp\_device.Fsp.SetFunctionModeCommand), 43

do() (ska\_mid\_cbmcs.fsp.fsp\_device.Fsp.StandbyCommand), 42

do() (ska\_mid\_cbmcs.fsp.fsp\_device.Fsp.UpdateDelayModelCommand), 45

do() (ska\_mid\_cbmcs.fsp.fsp\_device.Fsp.UpdateJonesMatrixCommand), 44

do() (ska\_mid\_cbmcs.fsp.fsp\_device.Fsp.UpdateTimingBeamWeightsCommand), 45

do() (ska\_mid\_cbmcs.fsp.fsp\_pss\_subarray\_device.FspPssSubarray.Configure), 61

do() (ska\_mid\_cbmcs.fsp.fsp\_pss\_subarray\_device.FspPssSubarray.EndScan), 61

do() (ska\_mid\_cbmcs.fsp.fsp\_pss\_subarray\_device.FspPssSubarray.GoToScan), 62

do() (ska\_mid\_cbmcs.fsp.fsp\_pss\_subarray\_device.FspPssSubarray.InitScan), 58

do() (ska\_mid\_cbmcs.fsp.fsp\_pss\_subarray\_device.FspPssSubarray.OffScan), 60

do() (ska\_mid\_cbmcs.fsp.fsp\_pss\_subarray\_device.FspPssSubarray.OnScan), 60

do() (ska\_mid\_cbmcs.fsp.fsp\_pss\_subarray\_device.FspPssSubarray.Scan), 61

do() (ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_device.FspPstSubarray.Configure), 66

do() (ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_device.FspPstSubarray.EndScan), 67

do() (ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_device.FspPstSubarray.GoToScan), 67

do() (ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_device.FspPstSubarray.InitCfipfSpipmstsubarray), 64

do() (ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_device.FspPstSubarray.OffCfipfSpipmstsubarray), 66

do() (ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_device.FspPstSubarray.OnCfipfSpipmstsubarray), 66

do() (ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_device.FspPstSubarray.Scan), 67

do() (ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_device.FspPstSubarray.Standby), 66

do() (ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_device.FspPstSubarray.StandbyCpnmndswitch.power\_switch\_device.PowerSwitch), 82

do() (ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_device.FspPstSubarray.UpdateJonesMatrix), 82

do() (ska\_mid\_cbmcs.power\_switch.power\_switch\_device.PowerSwitch.TurnOn), 82

do() (ska\_mid\_cbmcs.power\_switch.power\_switch\_device.PowerSwitch.TurnOff), 82

do() (ska\_mid\_cbmcs.subarray.subarray\_device.CbfSubarray.AddReception), 36

```

do() (ska_mid_cbmcs_subarray_subarray_device.CbfSubarray.ConfigureScanCommand
      method), 36
      end_scan() (ska_mid_cbmcs_fsp.fsp_pss_subarray_component_manager
end_scan() (ska_mid_cbmcs_fsp.fsp_pst_subarray_component_manager
do() (ska_mid_cbmcs_subarray_subarray_device.CbfSubarray.EndScanCommand
      method), 37
      end_scan() (ska_mid_cbmcs_fsp.fsp_pst_subarray_component_manager
do() (ska_mid_cbmcs_subarray_subarray_device.CbfSubarray.InitCommand), 69
      method), 34
      end_scan() (ska_mid_cbmcs_subarray_subarray_component_manager.C
do() (ska_mid_cbmcs_subarray_subarray_device.CbfSubarray.RemoveAddReceiversCommand
      method), 36
      end_scan() (ska_mid_cbmcs_vcc.vcc_component_manager.VccCompone
do() (ska_mid_cbmcs_subarray_subarray_device.CbfSubarray.RemoveReadPort80Command
      method), 35
      end_scan() (ska_mid_cbmcs_subarray_subarray_component_manager.C
do() (ska_mid_cbmcs_subarray_subarray_device.CbfSubarray.ScanCommand
      method), 37
      faulty(ska_mid_cbmcs_component.component_manager.CbfComponent
do() (ska_mid_cbmcs_talon_lru_talon_lru_device.TalonLRU.InitCommand), 28
      method), 88
      frequency_band(ska_mid_cbmcs_fsp.fsp_corr_subarray_component_ma
do() (ska_mid_cbmcs_talon_lru_talon_lru_device.TalonLRU.OffCommand), 55
      method), 88
      frequency_band(ska_mid_cbmcs_subarray_subarray_component_ma
do() (ska_mid_cbmcs_talon_lru_talon_lru_device.TalonLRU.OnCommand), 38
      method), 88
      frequency_band(ska_mid_cbmcs_vcc.vcc_component_manager.VccCom
do() (ska_mid_cbmcs_vcc_vcc_device.VccAbortCommand
      method), 75
      frequency_band_offset_stream_1
do() (ska_mid_cbmcs_vcc_vcc_device.VccConfigureBandCommand(ska_mid_cbmcs_fsp.fsp_corr_subarray_component_manager.F
      method), 74
      property), 55
      frequency_band_offset_stream_1
do() (ska_mid_cbmcs_vcc_vcc_device.VccConfigureScanCommand
      method), 74
      frequency_band_offset_stream_1
      (ska_mid_cbmcs_vcc.vcc_component_manager.VccComponentM
do() (ska_mid_cbmcs_vcc_vcc_device.VccConfigureSearchWindowCommand
      method), 78
      frequency_band_offset_stream_2
      frequency_band_offset_stream_2
do() (ska_mid_cbmcs_vcc_vcc_device.VccEndScanCommand
      method), 75
      (ska_mid_cbmcs_fsp.fsp_corr_subarray_component_manager.F
      property), 55
      frequency_band_offset_stream_2
do() (ska_mid_cbmcs_vcc_vcc_device.VccGoToIdleCommand
      method), 75
      (ska_mid_cbmcs_vcc.vcc_component_manager.VccComponentM
do() (ska_mid_cbmcs_vcc_vcc_device.VccInitCommand
      method), 73
      frequency_offset_delta_f
      frequency_offset_k(ska_mid_cbmcs_vcc.vcc_component_manager.Vc
      property), 77
      frequency_offset_k
do() (ska_mid_cbmcs_vcc_vcc_device.VccObsResetCommand
      method), 75
      (ska_mid_cbmcs_vcc.vcc_component_manager.VccComponentM
      property), 77
      frequency_offset_k
do() (ska_mid_cbmcs_vcc_vcc_device.VccOffCommand
      method), 73
      frequency_offset_k(ska_mid_cbmcs_vcc.vcc_component_manager.Vc
      property), 77
      frequency_offset_k
do() (ska_mid_cbmcs_vcc_vcc_device.VccOnCommand
      method), 73
      frequency_slice_id(ska_mid_cbmcs_fsp.fsp_corr_subarray_compone
      property), 56
      frequency_slice_id
do() (ska_mid_cbmcs_vcc_vcc_device.VccScanCommand
      method), 74
      Fsp (class in ska_mid_cbmcs_fsp.fsp_device), 40
      Fsp.AddSubarrayMembershipCommand (class in
do() (ska_mid_cbmcs_vcc_vcc_device.VccStandbyCommand
      method), 73
      ska_mid_cbmcs_fsp.fsp_device), 43
      Fsp.InitCommand (class in
do() (ska_mid_cbmcs_vcc_vcc_device.VccUpdateDelayModelCommand
      method), 76
      ska_mid_cbmcs_fsp.fsp_device), 42
      Fsp.OffCommand (class in
do() (ska_mid_cbmcs_vcc_vcc_device.VccUpdateDopplerPhaseCorrectionCommand
      method), 76
      ska_mid_cbmcs_fsp.fsp_device), 42
      Fsp.OnCommand (class in
do() (ska_mid_cbmcs_vcc_vcc_device.VccUpdateJonesMatrixCommand
      method), 76
      ska_mid_cbmcs_fsp.fsp_device), 42
      Fsp.RemoveSubarrayMembershipCommand (class in
      ska_mid_cbmcs_fsp.fsp_device), 44
      Fsp.SetFunctionModeCommand (class in
      ska_mid_cbmcs_fsp.fsp_device), 43
      Fsp.StandbyCommand (class in
      ska_mid_cbmcs_fsp.fsp_device), 42
      E
      end_scan() (ska_mid_cbmcs_fsp.fsp_corr_subarray_component_manager.FspCorrSubarrayComponentManager

```

Fsp.UpdateDelayModelCommand (class in *ska\_mid\_cbf\_mcs.fsp.fsp\_device*), 45  
Fsp.UpdateJonesMatrixCommand (class in *ska\_mid\_cbf\_mcs.fsp.fsp\_device*), 44  
Fsp.UpdateTimingBeamWeightsCommand (class in *ska\_mid\_cbf\_mcs.fsp.fsp\_device*), 45  
*fsp\_channel1\_offset* (*ska\_mid\_cbf\_mcs.fsp.fsp\_corr\_subarray\_property*), 56  
*fsp\_id* (*ska\_mid\_cbf\_mcs.fsp.fsp\_pss\_subarray\_component\_manager\_property*), 62  
*fsp\_id* (*ska\_mid\_cbf\_mcs.fsp.fsp\_pst\_subarray\_component\_manager\_property*), 68  
FspComponentManager (class in *ska\_mid\_cbf\_mcs.fsp.fsp\_component\_manager*), 46  
FspCorrSubarray (class in *ska\_mid\_cbf\_mcs.fsp.fsp\_corr\_subarray\_device*), 49  
FspCorrSubarray.ConfigureScanCommand (class in *FspPssSubarrayComponentManager* (class in *ska\_mid\_cbf\_mcs.fsp.fsp\_corr\_subarray\_device*), 53  
FspCorrSubarray.EndScanCommand (class in *FspPstSubarray* (class in *ska\_mid\_cbf\_mcs.fsp.fsp\_corr\_subarray\_device*), 54  
FspCorrSubarray.GoToIdleCommand (class in *FspPstSubarray.ConfigureScanCommand* (class in *ska\_mid\_cbf\_mcs.fsp.fsp\_corr\_subarray\_device*), 54  
FspCorrSubarray.InitCommand (class in *FspPstSubarray.EndScanCommand* (class in *ska\_mid\_cbf\_mcs.fsp.fsp\_corr\_subarray\_device*), 49  
FspCorrSubarray.OffCommand (class in *FspPstSubarray.GoToIdleCommand* (class in *ska\_mid\_cbf\_mcs.fsp.fsp\_corr\_subarray\_device*), 53  
FspCorrSubarray.OnCommand (class in *FspPstSubarray.InitCommand* (class in *ska\_mid\_cbf\_mcs.fsp.fsp\_corr\_subarray\_device*), 52  
FspCorrSubarray.ScanCommand (class in *FspPstSubarray.OffCommand* (class in *ska\_mid\_cbf\_mcs.fsp.fsp\_corr\_subarray\_device*), 54  
FspCorrSubarray.StandbyCommand (class in *FspPstSubarray.OnCommand* (class in *ska\_mid\_cbf\_mcs.fsp.fsp\_corr\_subarray\_device*), 53  
FspCorrSubarrayComponentManager (class in *FspPstSubarray.ScanCommand* (class in *ska\_mid\_cbf\_mcs.fsp.fsp\_corr\_subarray\_component\_manager* (class in *ska\_mid\_cbf\_mcs.fsp.fsp\_pst\_subarray\_device*), 55  
FspPssSubarray (class in *FspPstSubarray.StandbyCommand* (class in *ska\_mid\_cbf\_mcs.fsp.fsp\_pss\_subarray\_device*), 58  
FspPssSubarray.ConfigureScanCommand (class in *FspPstSubarrayComponentManager* (class in *ska\_mid\_cbf\_mcs.fsp.fsp\_pss\_subarray\_device*), 61  
FspPssSubarray.EndScanCommand (class in *function\_mode* (*ska\_mid\_cbf\_mcs.fsp.fsp\_component\_manager.FspComp* property), 46  
61

**G**

init\_command\_objects()  
 get\_device\_proxy() (*ska\_mid\_cbf\_mcs.talon\_lru.talon\_lru\_component\_manager.TalonLRUComponentManager*,  
*CbfSubarray method*), 89  
 get\_fsp\_corr\_config\_id() (*ska\_mid\_cbf\_mcs.fsp.fsp\_component\_manager.FspComponentManager*,  
*ska\_mid\_cbf\_mcs.talon\_lru.talon\_lru\_device.TalonLRU method*), 49  
 get\_num\_capabilities() (*ska\_mid\_cbf\_mcs.controller.controller\_device.CbfController*,  
*ska\_mid\_cbf\_mcs.vcc.vcc\_device.Vcc method*), 30  
 get\_outlet\_list() (*ska\_mid\_cbf\_mcs.power\_switch.power\_switch\_driver.PowerSwitchDriver*,  
*ska\_mid\_cbf\_mcs.power\_switch.power\_switch\_driver.PowerSwitch method*), 86  
 get\_outlet\_list() (*ska\_mid\_cbf\_mcs.power\_switch.power\_switch\_simulator.PowerSwitchSimulator*,  
*fsp.fsp\_corr\_subarray\_component property*), 87  
 get\_outlet\_power\_mode() (*ska\_mid\_cbf\_mcs.power\_switch.power\_switch\_component\_manager.PowerSwitchComponentManager*,  
*method*), 43  
 get\_outlet\_power\_mode() (*ska\_mid\_cbf\_mcs.vcc.vcc\_device.Vcc*,  
*ConfigureSearchWindow method*), 77  
 get\_outlet\_power\_mode() (*ska\_mid\_cbf\_mcs.vcc.vcc\_device.Vcc*,  
*UpdateDelayModel method*), 76  
 get\_outlet\_power\_mode() (*ska\_mid\_cbf\_mcs.vcc.vcc\_device.Vcc*,  
*UpdateDopplerPhase method*), 75  
 getConfigID() (*ska\_mid\_cbf\_mcs.fsp.fsp\_device.Fsp*,  
*method*), 44  
 getLinkAndAddress() (*ska\_mid\_cbf\_mcs.fsp.fsp\_corr\_subarray\_device.FspCorrSubarray*, 27  
*method*), 55  
 go\_to\_idle() (*ska\_mid\_cbf\_mcs.fsp.fsp\_corr\_subarray\_component\_manager.FspCorrSubarrayComponentManager*,  
*method*), 58  
 go\_to\_idle() (*ska\_mid\_cbf\_mcs.fsp.fsp\_pss\_subarray\_component\_manager.FspPssSubarrayComponentManager*,  
*method*), 64  
 go\_to\_idle() (*ska\_mid\_cbf\_mcs.fsp.fsp\_pst\_subarray\_component\_manager.FspPstSubarrayComponentManager*,  
*method*), 69  
 |  
 init\_command\_objects() (*ska\_mid\_cbf\_mcs.controller.controller\_device.CbfController*,  
*Fsp method*), 44  
 init\_command\_objects() (*ska\_mid\_cbf\_mcs.fsp.fsp\_device.Fsp*,  
*method*), 49  
 init\_command\_objects() (*ska\_mid\_cbf\_mcs.fsp.fsp\_corr\_subarray\_device.FspCorrSubarray*,  
*Fsp method*), 43  
 init\_command\_objects() (*ska\_mid\_cbf\_mcs.fsp.fsp\_device.Fsp*,  
*method*), 40  
 init\_command\_objects() (*ska\_mid\_cbf\_mcs.fsp.fsp\_pss\_subarray\_device.FspPssSubarray*,  
*Fsp method*), 45  
 init\_command\_objects() (*ska\_mid\_cbf\_mcs.fsp.fsp\_pst\_subarray\_device.FspPstSubarray*,  
*Fsp method*), 46  
 init\_command\_objects() (*ska\_mid\_cbf\_mcs.power\_switch.power\_switch\_device.PowerSwitch*,  
*jones\_matrix(ska\_mid\_cbf\_mcs.fsp.fsp\_component\_manager.FspComponentManager property)*, 46

**J**

jones\_matrix(ska\_mid\_cbmcs.vcc.vcc\_component\_manager.VccComponentManager property), 78

**L**

Log() (ska\_mid\_cbmcs.talon\_dx\_log\_consumer.talon\_dx\_log\_consumer.log method), 90

**M**

module

- ska\_mid\_cbmcs.component.component\_manager, 27
- ska\_mid\_cbmcs.controller, 30
- ska\_mid\_cbmcs.fsp, 40
- ska\_mid\_cbmcs.power\_switch, 81
- ska\_mid\_cbmcs.power\_switch.power\_switch\_driver, 81
- 84
- ska\_mid\_cbmcs.power\_switch.power\_switch\_simulator, 86
- ska\_mid\_cbmcs.subarray, 34
- ska\_mid\_cbmcs.talon\_lru, 87
- ska\_mid\_cbmcs.talon\_dx\_log\_consumer, 90
- ska\_mid\_cbmcs.vcc, 70

**N**

num\_outlets(ska\_mid\_cbmcs.power\_switch.power\_switch\_simulator.PowerSwitch.TurnOffOutletCommand property), 83

num\_outlets(ska\_mid\_cbmcs.power\_switch.power\_switch\_driver.PowerSwitchDriver property), 85

num\_outlets(ska\_mid\_cbmcs.power\_switch.power\_switch\_simulator.PowerSwitchComponentManager property), 86

**O**

obsreset() (ska\_mid\_cbmcs.subarray.subarray\_component\_manager.CbfSubarrayComponentManager method), 40

obsreset() (ska\_mid\_cbmcs.vcc.vcc\_component\_manager.VccComponentManager.VccComponentManager method), 80

off() (ska\_mid\_cbmcs.controller.controller\_component\_manager.ControllerComponentManager method), 32

off() (ska\_mid\_cbmcs.fsp.fsp\_component\_manager.FspComponentManager.FspComponentManager method), 48

off() (ska\_mid\_cbmcs.subarray.subarray\_component\_manager.CbfSubarrayComponentManager method), 38

off() (ska\_mid\_cbmcs.talon\_lru.talon\_lru\_component\_manager.TalonLRUComponentManager method), 89

off() (ska\_mid\_cbmcs.vcc.vcc\_component\_manager.VccComponentManager.VccComponentManager method), 79

on() (ska\_mid\_cbmcs.controller.controller\_component\_manager.ControllerComponentManager method), 32

on() (ska\_mid\_cbmcs.fsp.fsp\_component\_manager.FspComponentManager.FspComponentManager method), 47

on() (ska\_mid\_cbmcs.subarray.subarray\_component\_manager.CbfSubarrayComponentManager.CbfSubarrayComponentManager method), 38

on() (ska\_mid\_cbmcs.talon\_lru.talon\_lru\_component\_manager.TalonLRUComponentManager method), 89

**P**

power\_mode(ska\_mid\_cbmcs.component.component\_manager.CbfComponentManager property), 28

PowerSwitch (class in ska\_mid\_cbmcs.power\_switch.power\_switch\_device),

- PowerSwitch.GetOutletPowerModeCommand (class in ska\_mid\_cbmcs.power\_switch.power\_switch\_device), 82
- PowerSwitch.InitCommand (class in ska\_mid\_cbmcs.power\_switch.power\_switch\_device), 81
- PowerSwitch.TurnOffOutletCommand (class in ska\_mid\_cbmcs.power\_switch.power\_switch\_device), 82

**Q**

query\_timeouts(query\_timeouts attribute), 85

**R**

raiseTalonLRUComponentManagerError() (ska\_mid\_cbmcs.subarray.subarray\_component\_manager.CbfSubarrayComponentManager method), 88

read\_band5Tuning() (ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray\_device.FspCorrSubarrayDevice.FspCorrSubarrayDevice method), 51

read\_band5Tuning() (ska\_mid\_cbmcs.vcc.vcc\_device.VccDevice method), 71

read\_channelAveragingMap()

read\_commandProgress()  
    (ska\_mid\_cbmcs.controller.controller\_device.CbfController method), 30

read\_configID()  
    (ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray method), 52

read\_configID()  
    (ska\_mid\_cbmcs.fsp.fsp\_device.Fsp method), 41

read\_configID()  
    (ska\_mid\_cbmcs.fsp.fsp\_pss\_subarray\_device.FspPssSubarray method), 60

read\_configID()  
    (ska\_mid\_cbmcs.vcc.vcc\_device.Vcc method), 72

read\_corrBandwidth()  
    (ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray\_device.FspCorrSubarray method), 50

read\_delayModel()  
    (ska\_mid\_cbmcs.fsp.fsp\_device.Fsp method), 41

read\_delayModel()  
    (ska\_mid\_cbmcs.vcc.vcc\_device.Vcc method), 72

read\_dopplerPhaseCorrection()  
    (ska\_mid\_cbmcs.vcc.vcc\_device.Vcc method), 72

read\_frequencyBand()  
    (ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray\_device.FspCorrSubarray method), 50

read\_frequencyBand()  
    (ska\_mid\_cbmcs.subarray.subarray\_device.CbfSubarray method), 34

read\_frequencyBand()  
    (ska\_mid\_cbmcs.vcc.vcc\_device.Vcc method), 71

read\_frequencyBandOffsetStream1()  
    (ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray\_device.FspCorrSubarray method), 50

read\_frequencyBandOffsetStream1()  
    (ska\_mid\_cbmcs.vcc.vcc\_device.Vcc method), 71

read\_frequencyBandOffsetStream2()  
    (ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray\_device.FspCorrSubarray method), 50

read\_frequencyBandOffsetStream2()  
    (ska\_mid\_cbmcs.vcc.vcc\_device.Vcc method), 71

read\_frequencyOffsetDeltaF()  
    (ska\_mid\_cbmcs.controller.controller\_device.CbfController method), 30

read\_frequencyOffsetDeltaF()  
    (ska\_mid\_cbmcs.subarray.subarray\_device.CbfSubarray method), 35

read\_frequencyOffsetDeltaF()  
    (ska\_mid\_cbmcs.vcc.vcc\_device.Vcc method), 71

read\_frequencyOffsetK()  
    (ska\_mid\_cbmcs.controller.controller\_device.CbfController method), 30

read\_frequencyOffsetK()  
    (ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray\_device.CbfSubarray method), 35

read\_frequencyOffsetK()  
    (ska\_mid\_cbmcs.vcc.vcc\_device.Vcc method), 70

read\_frequencySliceID()  
    (ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray\_device.FspCorrSubarray method), 50

read\_fspChannel0ffset()  
    (ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray\_device.FspCorrSubarray method), 51

read\_fspChannel0ffset()  
    (ska\_mid\_cbmcs.fsp.fsp\_device.Fsp method), 41

read\_integrationFactor()  
    (ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray\_device.FspCorrSubarray method), 51

read\_isCommunicating()  
    (ska\_mid\_cbmcs.power\_switch.power\_switch\_device.PowerSwitch method), 81

read\_jonesMatrix()  
    (ska\_mid\_cbmcs.fsp.fsp\_device.Fsp method), 41

read\_jonesMatrix()  
    (ska\_mid\_cbmcs.vcc.vcc\_device.Vcc method), 72

read\_maxOutlets()  
    (ska\_mid\_cbmcs.power\_switch.power\_switch\_device.PowerSwitch method), 81

read\_outputEnable()  
    (ska\_mid\_cbmcs.fsp.fsp\_pss\_subarray\_device.FspPssSubarray method), 59

read\_outputEnable()  
    (ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_device.FspPstSubarray method), 65

read\_outputLinkMap()  
    (ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray\_device.FspCorrSubarray method), 52

read\_PDU1PowerMode()  
    (ska\_mid\_cbmcs.talon\_lru.talon\_lru\_device.TalonLRU method), 88

read\_PDU2PowerMode()  
    (ska\_mid\_cbmcs.talon\_lru.talon\_lru\_device.TalonLRU method), 88

read\_receptorID()  
    (ska\_mid\_cbmcs.vcc.vcc\_device.Vcc method), 70

read\_receptors()  
    (ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray\_device.FspCorrSubarray method), 50

read\_receptors()  
    (ska\_mid\_cbmcs.fsp.fsp\_pss\_subarray\_device.FspPssSubarray method), 59

read\_receptors()  
    (ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_device.FspPstSubarray method), 65

read\_receptors()  
    (ska\_mid\_cbmcs.subarray.subarray\_device.CbfSubarray method), 34

read\_receptorToVcc()  
    (ska\_mid\_cbmcs.controller.controller\_device.CbfController method), 30

*method), 30*  
**read\_rfiFlaggingMask()**  
*(ska\_mid\_cbmcs.vcc.vcc\_device.Vcc  
 method), 72*  
**read\_scanID()** *(ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray.~~removeExplorers()~~  
 method), 52*  
**read\_scanID()** *(ska\_mid\_cbmcs.fsp.fsp\_device.Fsp  
 method), 41*  
**read\_scanID()** *(ska\_mid\_cbmcs.fsp.fsp\_pss\_subarray\_device.FspPssSubarray.~~removeReceptors()~~  
 method), 59*  
**read\_scanID()** *(ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_device.FspPstSubarray.~~RemoveReceptors()~~  
 method), 65*  
**read\_scanID()** *(ska\_mid\_cbmcs.vcc.vcc\_device.Vcc  
 method), 72*  
**read\_searchBeamID()**  
*(ska\_mid\_cbmcs.fsp.fsp\_pss\_subarray\_device.FspPssSubarray.~~mid\_cbmcs.fsp.fsp\_device.Fsp~~  
 method), 59*  
**read\_searchBeams()** *(ska\_mid\_cbmcs.fsp.fsp\_pss\_subarray.~~RemoveTalonDXLogConsumerTarget()~~  
 method), 59*  
**read\_searchWindowID()**  
*(ska\_mid\_cbmcs.fsp.fsp\_pss\_subarray\_device.FspPssSubarray.~~mid\_cbmcs.subarray\_component\_manager.CbfSubarray~~  
 method), 59*  
**read\_subarrayconfigID()**  
*(ska\_mid\_cbmcs.controller.controller\_device.CbfController.~~property~~, 78  
 method), 30*  
**read\_subarrayMembership()**  
*(ska\_mid\_cbmcs.fsp.fsp\_device.Fsp method),  
 41*  
**read\_subarrayMembership()**  
*(ska\_mid\_cbmcs.vcc.vcc\_device.Vcc  
 method), 70*  
**read\_timingBeamID()**  
*(ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_device.FspPstSubarray.~~mid\_cbmcs.subarray\_component\_manager.CbfSubarray~~  
 method), 65*  
**read\_timingBeams()** *(ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_device.FspPstSubarray.~~mid\_cbmcs.vcc.vcc\_component\_manager.VccComponentManager~~  
 method), 65*  
**read\_timingBeamWeights()**  
*(ska\_mid\_cbmcs.fsp.fsp\_device.Fsp method),  
 42*  
**read\_vccToReceptor()**  
*(ska\_mid\_cbmcs.controller.controller\_device.CbfController.~~property~~, 30  
 method), 30*  
**read\_visDestinationAddress()**  
*(ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray\_device.FspCorrSubarray.~~property~~, 37  
 method), 51*  
**read\_zoomWindowTuning()**  
*(ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray\_device.FspCorrSubarray.~~property~~, 77  
 method), 51*  
**receptor\_id** *(ska\_mid\_cbmcs.vcc.vcc\_component\_manager.VccComponentManager.~~property~~, 77  
 property), 77*  
**receptors** *(ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray\_component\_manager.CbfSubarrayManagement.~~property~~, 57  
 property), 57*  
**receptors** *(ska\_mid\_cbmcs.fsp.fsp\_pss\_subarray\_component\_manager.FspPssSubarrayComponentManager.~~setFunctionMode~~  
 property), 63*  
**receptors** *(ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_component\_manager.CbfSubarrayManagement.~~property~~, 68  
 property), 68*  
**receptors** *(ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_component\_manager.CbfSubarrayManagement.~~property~~, 38  
 property), 38*  
**receptors** *(ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_component\_manager.CbfSubarrayManagement.~~property~~, 47  
 property), 47*  
**removeExplorers()**  
*(ska\_mid\_cbmcs.subarray\_component\_manager.CbfSubarray.~~method~~, 39  
 method), 39*  
**remove\_receptors()** *(ska\_mid\_cbmcs.subarray\_component\_manager.CbfSubarray.~~method~~, 35  
 method), 35*  
**remove\_subarray\_membership()**  
*(ska\_mid\_cbmcs.subarray\_component\_manager.CbfSubarray.~~method~~, 35  
 method), 35*  
**RemoveReceptors()** *(ska\_mid\_cbmcs.subarray\_device.CbfSubarray.~~method~~, 35  
 method), 35*  
**RemoveSubarrayMembership()**  
*(ska\_mid\_cbmcs.fsp.fsp\_device.Fsp method),  
 44*  
**RemoveTalonDXLogConsumerTarget()**  
*(ska\_mid\_cbmcs.talondx\_log\_consumer.talondx\_log\_consumer.~~method~~, 90  
 method), 90*  
**Request()** *(ska\_mid\_cbmcs.subarray\_component\_manager.CbfSubarray.~~method~~, 40  
 method), 40*  
**rfi\_flagging\_mask** *(ska\_mid\_cbmcs.vcc.vcc\_component\_manager.VccComponentManager.~~property~~, 78  
 property), 78*  
**S**  
**scan()** *(ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray\_component\_manager.FspCorrSubarray.~~method~~, 58  
 method), 58*  
**scan()** *(ska\_mid\_cbmcs.fsp.fsp\_pss\_subarray\_component\_manager.FspPssSubarray.~~method~~, 64  
 method), 64*  
**scan()** *(ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_component\_manager.FspPstSubarray.~~method~~, 69  
 method), 69*  
**Scan()** *(ska\_mid\_cbmcs.subarray\_component\_manager.CbfSubarray.~~method~~, 39  
 method), 39*  
**Scan()** *(ska\_mid\_cbmcs.vcc.vcc\_component\_manager.VccComponentManager.~~method~~, 80  
 method), 80*  
**scan\_id** *(ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray\_component\_manager.FspCorrSubarray.~~property~~, 57  
 property), 57*  
**scan\_id** *(ska\_mid\_cbmcs.fsp.fsp\_pss\_subarray\_component\_manager.FspPssSubarray.~~property~~, 62  
 property), 62*  
**Scan\_id** *(ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_component\_manager.FspPstSubarray.~~property~~, 68  
 property), 68*  
**scan\_id** *(ska\_mid\_cbmcs.subarray\_component\_manager.CbfSubarray.~~property~~, 37  
 property), 37*  
**scan\_id** *(ska\_mid\_cbmcs.vcc.vcc\_component\_manager.VccComponentManager.~~property~~, 77  
 property), 77*  
**Search\_beam\_id** *(ska\_mid\_cbmcs.fsp.fsp\_pss\_subarray\_component\_manager.CbfSubarray.~~property~~, 63  
 property), 63*  
**search\_beams** *(ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_component\_manager.CbfSubarray.~~property~~, 63  
 property), 63*  
**Search\_window\_id** *(ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_component\_manager.CbfSubarray.~~property~~, 63  
 property), 63*  
**setFunctionMode** *(ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_component\_manager.CbfSubarrayManagement.~~property~~, 63  
 property), 63*

*method), 48*  
*SetFunctionMode() (ska\_mid\_cbf\_mcs.fsp.fsp\_device.Fsp*  
    *method), 43*  
*SetTalonDxLogConsumerTarget()*  
    *(ska\_mid\_cbf\_mcs.talon\_dx\_log\_consumer.talon\_dx\_log\_consumer.set\_target)*  
        *method), 90*  
*simulation\_mode(ska\_mid\_cbf\_mcs.fsp.fsp\_component\_manager.FspComponentManager.fsp\_pst\_subarray\_component\_manager.Fsp*  
    *property), 47*  
*simulation\_mode(ska\_mid\_cbf\_mcs.fsp.fsp\_corr\_subarray\_component\_manager.Fsp*  
    *start\_communicating()*  
        *(ska\_mid\_cbf\_mcs.fsp.fsp\_pst\_subarray\_component\_manager.Fsp*  
            *method), 69*  
*simulation\_mode(ska\_mid\_cbf\_mcs.fsp.fsp\_corr\_subarray\_component\_manager.Fsp*  
    *stop\_communicating()*  
        *(ska\_mid\_cbf\_mcs.power\_switch.power\_switch\_component\_manager.Fsp*  
            *method), 69*  
*simulation\_mode(ska\_mid\_cbf\_mcs.power\_switch.power\_switch\_component\_manager.Fsp*  
    *start\_communicating()*  
        *(ska\_mid\_cbf\_mcs.power\_switch.power\_switch\_component\_manager.Fsp*  
            *method), 69*  
*simulation\_mode(ska\_mid\_cbf\_mcs.vcc.vcc\_component\_manager.VccComponentManager.fsp\_subarray\_component\_manager.CbfS*  
    *property), 78*  
        *(ska\_mid\_cbf\_mcs.vcc.vcc\_component\_manager.VccComponentManager.fsp\_subarray\_component\_manager.CbfS*  
            *method), 38*  
*ska\_mid\_cbf\_mcs.component.component\_manager.start\_communicating()*  
    *(ska\_mid\_cbf\_mcs.talon\_lru.talon\_lru\_component\_manager.TalonLruComponentManager.fsp\_subarray\_component\_manager.CbfS*  
        *method), 27*  
*ska\_mid\_cbf\_mcs.controller.start\_communicating()*  
    *(ska\_mid\_cbf\_mcs.talon\_lru.talon\_lru\_component\_manager.TalonLruComponentManager.fsp\_subarray\_component\_manager.CbfS*  
        *method), 89*  
*ska\_mid\_cbf\_mcs.fsp.start\_communicating()*  
    *(ska\_mid\_cbf\_mcs.talon\_lru.talon\_lru\_component\_manager.TalonLruComponentManager.fsp\_subarray\_component\_manager.CbfS*  
        *method), 78*  
*ska\_mid\_cbf\_mcs.power\_switch.stop\_communicating()*  
    *(ska\_mid\_cbf\_mcs.component.component\_manager.CbfComponentManager.fsp\_subarray\_component\_manager.CbfS*  
        *method), 81*  
*ska\_mid\_cbf\_mcs.power\_switch.power\_switch\_driver.stop\_communicating()*  
    *(ska\_mid\_cbf\_mcs.component.component\_manager.CbfComponentManager.fsp\_subarray\_component\_manager.CbfS*  
        *method), 27*  
*ska\_mid\_cbf\_mcs.power\_switch.power\_switch\_simulator.stop\_communicating()*  
    *(ska\_mid\_cbf\_mcs.controller.controller\_component\_manager.ControllerComponentManager.fsp\_subarray\_component\_manager.CbfS*  
        *method), 84*  
        *(ska\_mid\_cbf\_mcs.controller.controller\_component\_manager.ControllerComponentManager.fsp\_subarray\_component\_manager.CbfS*  
            *method), 32*  
*ska\_mid\_cbf\_mcs.subarray.stop\_communicating()*  
    *(ska\_mid\_cbf\_mcs.fsp.fsp\_component\_manager.FspComponentManager.fsp\_subarray\_component\_manager.CbfS*  
        *method), 86*  
        *(ska\_mid\_cbf\_mcs.fsp.fsp\_component\_manager.FspComponentManager.fsp\_subarray\_component\_manager.CbfS*  
            *method), 47*  
*ska\_mid\_cbf\_mcs.talon\_lru.stop\_communicating()*  
    *(ska\_mid\_cbf\_mcs.fsp.fsp\_component\_manager.FspComponentManager.fsp\_subarray\_component\_manager.CbfS*  
        *method), 87*  
        *(ska\_mid\_cbf\_mcs.fsp.fsp\_component\_manager.FspComponentManager.fsp\_subarray\_component\_manager.CbfS*  
            *method), 47*  
*ska\_mid\_cbf\_mcs.talon\_dx\_log\_consumer.stop\_communicating()*  
    *(ska\_mid\_cbf\_mcs.fsp.fsp\_corr\_subarray\_component\_manager.FspComponentManager.fsp\_subarray\_component\_manager.CbfS*  
        *method), 90*  
        *(ska\_mid\_cbf\_mcs.fsp.fsp\_corr\_subarray\_component\_manager.FspComponentManager.fsp\_subarray\_component\_manager.CbfS*  
            *method), 57*  
*ska\_mid\_cbf\_mcs.vcc.stop\_communicating()*  
    *(ska\_mid\_cbf\_mcs.fsp.fsp\_pst\_subarray\_component\_manager.FspComponentManager.fsp\_subarray\_component\_manager.CbfS*  
        *method), 70*  
        *(ska\_mid\_cbf\_mcs.fsp.fsp\_pst\_subarray\_component\_manager.FspComponentManager.fsp\_subarray\_component\_manager.CbfS*  
            *method), 47*  
*standby() (ska\_mid\_cbf\_mcs.controller.controller\_component\_manager.fsp\_subarray\_component\_manager.CbfS*  
    *method), 32*  
        *(ska\_mid\_cbf\_mcs.controller.controller\_component\_manager.fsp\_subarray\_component\_manager.CbfS*  
            *method), 69*  
        *(ska\_mid\_cbf\_mcs.fsp.fsp\_component\_manager.FspComponentManager.fsp\_subarray\_component\_manager.CbfS*  
            *method), 69*  
*standby() (ska\_mid\_cbf\_mcs.fsp.fsp\_component\_manager.FspComponentManager.fsp\_subarray\_component\_manager.CbfS*  
    *method), 48*  
        *(ska\_mid\_cbf\_mcs.fsp.fsp\_component\_manager.FspComponentManager.fsp\_subarray\_component\_manager.CbfS*  
            *method), 69*  
*standby() (ska\_mid\_cbf\_mcs.subarray.subarray\_component\_manager.fsp\_subarray\_component\_manager.CbfS*  
    *method), 38*  
        *(ska\_mid\_cbf\_mcs.power\_switch.power\_switch\_component\_manager.PowerSwitchComponentManager.fsp\_subarray\_component\_manager.CbfS*  
            *method), 38*  
*standby() (ska\_mid\_cbf\_mcs.talon\_lru.talon\_lru\_component\_manager.TalonLruComponentManager.fsp\_subarray\_component\_manager.CbfS*  
    *method), 89*  
        *(ska\_mid\_cbf\_mcs.talon\_lru.talon\_lru\_component\_manager.TalonLruComponentManager.fsp\_subarray\_component\_manager.CbfS*  
            *method), 89*  
*start\_communicating()*  
    *(ska\_mid\_cbf\_mcs.component.component\_manager.CbfComponentManager.fsp\_subarray\_component\_manager.CbfS*  
        *method), 27*  
        *(ska\_mid\_cbf\_mcs.talon\_lru.talon\_lru\_component\_manager.TalonLruComponentManager.fsp\_subarray\_component\_manager.CbfS*  
            *method), 89*  
*start\_communicating()*  
    *(ska\_mid\_cbf\_mcs.controller.controller\_component\_manager.ControllerComponentManager.fsp\_subarray\_component\_manager.CbfS*  
        *method), 32*  
        *(ska\_mid\_cbf\_mcs.talon\_lru.talon\_lru\_component\_manager.TalonLruComponentManager.fsp\_subarray\_component\_manager.CbfS*  
            *method), 79*  
*start\_communicating()*  
    *(ska\_mid\_cbf\_mcs.fsp.fsp\_component\_manager.FspComponentManager.fsp\_subarray\_component\_manager.CbfS*  
        *method), 47*  
        *(ska\_mid\_cbf\_mcs.fsp.fsp\_corr\_subarray\_component\_manager.FspComponentManager.fsp\_subarray\_component\_manager.CbfS*  
            *method), 47*  
*start\_communicating()*  
    *(ska\_mid\_cbf\_mcs.vcc.vcc\_component\_manager.VccComponentManager.fsp\_subarray\_component\_manager.CbfS*  
        *method), 78*

subarray\_id (*ska\_mid\_cbmcs.subarray.subarray\_component\_manager.ComponentManager*  
*property*), 37  
**subarray\_membership** (*ska\_mid\_cbmcs.fsp.fsp\_component\_manager.FspComponentManager*  
*property*), 46  
**T** *update\_telescope\_subarray\_ComponentManager*  
*(ska\_mid\_cbmcs.component.component\_manager.CbfComponentManager*  
*method)*, 28  
**TalonDxComponentManager** (*class* *in* (*ska\_mid\_cbmcs.subarray.subarray\_component\_manager.CbfSubarrayComponentManager*  
*ska\_mid\_cbmcs.controller.talon\_dx\_component\_manager*), 40  
32 *update\_delay\_model()*  
**TalonDxLogConsumer** (*class* *in* (*ska\_mid\_cbmcs.fsp.fsp\_component\_manager.FspComponentManager*  
*ska\_mid\_cbmcs.talon\_dx\_log\_consumer.talon\_dx\_log\_consumer*), 48  
90 *update\_delay\_model()*  
**TalonLRU** (*class in ska\_mid\_cbmcs.talon\_lru.talon\_lru\_device*), 87  
87 *(ska\_mid\_cbmcs.vcc.vcc\_component\_manager.VccComponentManager*  
*method)*, 80  
**TalonLRU.InitCommand** (*class* *in* (*ska\_mid\_cbmcs.talon\_lru.talon\_lru\_device*), 88  
88 *update\_doppler\_phase\_correction()*  
*(ska\_mid\_cbmcs.vcc.vcc\_component\_manager.VccComponentManager*  
*method)*, 80  
**TalonLRU.OffCommand** (*class* *in* (*ska\_mid\_cbmcs.talon\_lru.talon\_lru\_device*), 88  
88 *update\_jones\_matrix()*  
*(ska\_mid\_cbmcs.fsp.fsp\_component\_manager.FspComponentManager*  
*method)*, 48  
**TalonLRU.OnCommand** (*class* *in* (*ska\_mid\_cbmcs.talon\_lru.talon\_lru\_device*), 88  
88 *update\_jones\_matrix()*  
*(ska\_mid\_cbmcs.vcc.vcc\_component\_manager.VccComponentManager*  
*method)*, 81  
**TalonLRUComponentManager** (*class* *in* *update\_timing\_beam\_weights()*  
*ska\_mid\_cbmcs.talon\_lru.talon\_lru\_component\_manager*, 89  
89 *(ska\_mid\_cbmcs.fsp.fsp\_component\_manager.FspComponentManager*  
*method)*, 49  
**timing\_beam\_id** (*ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_component\_manager*,  
*property*), 68 *UpdateDelayModel()* (*ska\_mid\_cbmcs.fsp.fsp\_device.Fsp*  
*method)*, 45  
**timing\_beam\_weights** *UpdateJonesMatrix()*  
*(ska\_mid\_cbmcs.fsp.fsp\_component\_manager.FspComponentManager*  
*property*), 47 *(ska\_mid\_cbmcs.fsp.fsp\_device.Fsp*  
*method)*, 45  
**timing\_beams** (*ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_component\_manager*,  
*property*), 68 *UpdateTimingBeamWeights()*  
*(ska\_mid\_cbmcs.fsp.fsp\_device.Fsp*  
*method)*, 45  
**turn\_off\_outlet()** (*ska\_mid\_cbmcs.power\_switch.power\_switch*), 46  
46 *(ska\_mid\_cbmcs.power\_switch\_component\_manager.PowerSwitchComponentManager*  
*method)*, 84  
**turn\_off\_outlet()** (*ska\_mid\_cbmcs.power\_switch.power\_switch\_driver*), 86  
86 *(PowerSwitchDriver*  
*method)*, 86 *validate\_input()* (*ska\_mid\_cbmcs.fsp.fsp\_corr\_subarray\_device.Fsp*  
*method)*, 37  
**turn\_off\_outlet()** (*ska\_mid\_cbmcs.power\_switch.power\_switch\_manager*), 87  
87 *(PowerSwitchSimulator*  
*method)*, 87 *validate\_input()* (*ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_device.Fsp*  
*method)*, 38  
**turn\_on\_outlet()** (*ska\_mid\_cbmcs.power\_switch.power\_switch\_manager*), 84  
84 *(PowerSwitchComponentManager*  
*method)*, 84 *validate\_input()* (*ska\_mid\_cbmcs.fsp.fsp\_pst\_subarray\_device.Fsp*  
*method)*, 39  
**turn\_on\_outlet()** (*ska\_mid\_cbmcs.power\_switch.power\_switch\_manager*), 86  
86 *(PowerSwitchDriver*  
*method)*, 86 *validate\_input()* (*ska\_mid\_cbmcs.subarray.subarray\_component\_manager*  
*method)*, 36  
**turn\_on\_outlet()** (*ska\_mid\_cbmcs.power\_switch.power\_switch\_manager*), 87  
87 *(PowerSwitchSimulator*  
*method)*, 87 *validate\_input()* (*ska\_mid\_cbmcs.subarray.subarray\_device.CbfSubarray*  
*method)*, 36  
**U** *validate\_input()* (*ska\_mid\_cbmcs.subarray.subarray\_device.CbfSubarray*  
*method)*, 37  
**update\_communication\_status()** *validate\_input()* (*ska\_mid\_cbmcs.subarray.subarray\_device.CbfSubarray*  
*method)*, 35  
**update\_component\_configuration()** *validate\_input()* (*ska\_mid\_cbmcs.vcc.vcc\_device.Vcc*.*ConfigureScan*  
*method)*, 74  
*(ska\_mid\_cbmcs.subarray.subarray\_component\_manager.CbfSubarrayComponentManager*  
*method)*, 40

```

validate_input() (ska_mid_cbf_mcs.vcc.vcc_device.Vcc.ConfigureBandWindowCommand
    method), 77
validate_ip() (ska_mid_cbf_mcs.subarray.subarray_component_manager.CbfSubarray
    method), 38
Vcc (class in ska_mid_cbf_mcs.vcc.vcc_device), 70
VccAbortCommand (class
    ska_mid_cbf_mcs.vcc.vcc_device), 75
VccConfigureBandCommand (class
    ska_mid_cbf_mcs.vcc.vcc_device), 73
VccConfigureScanCommand (class
    ska_mid_cbf_mcs.vcc.vcc_device), 74
VccConfigureSearchWindowCommand (class
    ska_mid_cbf_mcs.vcc.vcc_device), 76
VccEndScanCommand (class
    ska_mid_cbf_mcs.vcc.vcc_device), 75
VccGoToIdleCommand (class
    ska_mid_cbf_mcs.vcc.vcc_device), 75
VccInitCommand (class
    ska_mid_cbf_mcs.vcc.vcc_device), 73
VccObsResetCommand (class
    ska_mid_cbf_mcs.vcc.vcc_device), 75
VccOffCommand (class
    ska_mid_cbf_mcs.vcc.vcc_device), 73
VccOnCommand (class
    ska_mid_cbf_mcs.vcc.vcc_device), 73
VccScanCommand (class
    ska_mid_cbf_mcs.vcc.vcc_device), 74
VccStandbyCommand (class
    ska_mid_cbf_mcs.vcc.vcc_device), 73
VccUpdateDelayModelCommand (class
    ska_mid_cbf_mcs.vcc.vcc_device), 76
VccUpdateDopplerPhaseCorrectionCommand (class
    in ska_mid_cbf_mcs.vcc.vcc_device), 75
VccUpdateJonesMatrixCommand (class
    ska_mid_cbf_mcs.vcc.vcc_device), 76
VccComponentManager (class
    ska_mid_cbf_mcs.vcc.vcc_component_manager),
    77
vis_destination_address
    (ska_mid_cbf_mcs.fsp.fsp_corr_subarray_component_manager.FspCorrSubarrayComponentManager
        property), 56

```

**W**

```

write_configID() (ska_mid_cbf_mcs.fsp.fsp_corr_subarray_device.Fsp
    method), 52
write_configID() (ska_mid_cbf_mcs.fsp.fsp_device.Fsp
    method), 41
write_configID() (ska_mid_cbf_mcs.fsp.fsp_pss_subarray_device.FspPssSubarray
    method), 60
write_dopplerPhaseCorrection()
    (ska_mid_cbf_mcs.vcc.vcc_device.Vcc
        method), 72
write_frequencyOffsetDeltaF()
    (ska_mid_cbf_mcs.controller.controller_device.CbfController
        method), 35
write_frequencyOffsetDeltaF()
    (ska_mid_cbf_mcs.vcc.vcc_device.Vcc
        method), 71
in write_frequencyOffsetK()
    (ska_mid_cbf_mcs.controller.controller_device.CbfController
        method), 30
write_frequencyOffsetK()
    (ska_mid_cbf_mcs.subarray.subarray_device.CbfSubarray
        method), 35
in write_frequencyOffsetK()
    (ska_mid_cbf_mcs.vcc.vcc_device.Vcc
        method), 71
write_fspChannelOffset()
    (ska_mid_cbf_mcs.fsp.fsp_corr_subarray_device.FspCorrSubarray
        method), 52
in write_loggingLevel()
    (ska_mid_cbf_mcs.talondx_log_consumer.talondx_log_consumer
        method), 90
write_outputLinkMap()
    (ska_mid_cbf_mcs.fsp.fsp_corr_subarray_device.FspCorrSubarray
        method), 52
in write_receptorID()
    (ska_mid_cbf_mcs.vcc.vcc_device.Vcc
        method), 70
in write_receptors()
    (ska_mid_cbf_mcs.fsp.fsp_pst_subarray_device.FspPstSubarray
        method), 65
in write_receptors()
    (ska_mid_cbf_mcs.subarray.subarray_device.CbfSubarray
        method), 35
in write_scanID()
    (ska_mid_cbf_mcs.fsp.fsp_corr_subarray_device.FspCorrSubarray
        method), 52
in write_scanID()
    (ska_mid_cbf_mcs.fsp.fsp_pss_subarray_device.FspPssSubarray
        method), 60
in write_scanID()
    (ska_mid_cbf_mcs.fsp.fsp_pst_subarray_device.FspPstSubarray
        method), 66
write_simulationMode()
    (ska_mid_cbf_mcs.controller.controller_device.CbfController
        method), 52
in write_simulationMode()
    (ska_mid_cbf_mcs.fsp.fsp_corr_subarray_device.FspCorrSubarray
        method), 40
write_simulationMode()
    (ska_mid_cbf_mcs.fsp.fsp_device.Fsp
        method), 81
in write_simulationMode()
    (ska_mid_cbf_mcs.power_switch.power_switch_device.PowerSwitch
        method), 70
write_subarrayMembership()
    (ska_mid_cbf_mcs.vcc.vcc_device.Vcc
        method), 70

```

*method), 70*  
**write\_visDestinationAddress()**  
    *(ska\_mid\_cbm\_mcs.fsp.fsp\_corr\_subarray\_device.FspCorrSubarray*  
        *method), 51*

**Z**

**zoom\_window\_tuning** (*ska\_mid\_cbm\_mcs.fsp.fsp\_corr\_subarray\_component\_manager.FspCorrSubarrayComponentManager*  
    *property), 57*