

---

# **developer.skatelescope.org**

## **Documentation**

***Release 8.1.1***

**Marco Bartolini**

**Jul 28, 2022**



---

## Table of Contents

---

1	Quickstart	1
2	Background	3
3	Project layout	5
4	JSON representation	9
5	ska_oso_pdm.entities.common	19
6	ska_oso_pdm.entities.common.field_configuration	21
7	ska_oso_pdm.entities.common.procedures	25
8	ska_oso_pdm.entities.common.sb_definition	29
9	ska_oso_pdm.entities.common.scan_definition	33
10	ska_oso_pdm.entities.csp.common	35
11	ska_oso_pdm.entities.sdp	39
12	ska_oso_pdm.entities.dish.dish_allocation	45
13	ska_oso_pdm.entities.dish.dish_configuration	47
14	ska_oso_pdm.entities.mccs.mccs_allocation	49
15	ska_oso_pdm.entities.mccs.subarray_beam_configuration	51
16	ska_oso_pdm.entities.low.target_beam_configuration	53
17	ska_oso_pdm.schemas.codec	55
18	ska_oso_pdm.schemas.shared	57
19	ska_oso_pdm.schemas.common	59
20	ska_oso_pdm.schemas.common.field_configuration	61

<b>21</b>	<b>ska_oso_pdm.schemas.common.procedures</b>	<b>63</b>
<b>22</b>	<b>ska_oso_pdm.schemas.common.sb_definition</b>	<b>65</b>
<b>23</b>	<b>ska_oso_pdm.schemas.common.scan_definition</b>	<b>67</b>
<b>24</b>	<b>ska_oso_pdm.schemas.csp.common</b>	<b>69</b>
<b>25</b>	<b>ska_oso_pdm.schemas.sdp</b>	<b>73</b>
<b>26</b>	<b>ska_oso_pdm.schemas.dish.dish_allocation</b>	<b>75</b>
<b>27</b>	<b>ska_oso_pdm.schemas.dish.dish_configuration</b>	<b>77</b>
<b>28</b>	<b>ska_oso_pdm.schemas.mccs.mccs_allocation</b>	<b>79</b>
<b>29</b>	<b>ska_oso_pdm.schemas.mccs.subarray_beam_configuration</b>	<b>81</b>
<b>30</b>	<b>ska_oso_pdm.schemas.mccs.target_beam_configuration</b>	<b>83</b>
<b>31</b>	<b>Project description</b>	<b>85</b>
<b>32</b>	<b>Indices and tables</b>	<b>87</b>
	<b>Python Module Index</b>	<b>89</b>
	<b>Index</b>	<b>91</b>

# CHAPTER 1

---

## Quickstart

---

This project uses Docker containers for development and testing, and make to provide a consistent UI.

Build a new Docker image and execute the test suite with:

```
make test
```

Launch an interactive shell inside a container, with your workspace visible inside the container, with:

```
make interactive
```

To list all available targets, execute make without any arguments, e.g.,

```
tangodev@ska-oso-pdm $ make

build                      build the application image

down                       stop develop/test environment and any ↵
↪interactive session

help                       show this help.

interactive                start an interactive session using the ↵
↪project image             (caution: R/W mounts source directory to / ↵
↪app)

lint                       lint the application (static code ↵
↪analysis)

test                       test the application

up                        start develop/test environment
```



# CHAPTER 2

---

## Background

---

The SKA Project Data Model (PDM) defines a logical data model with entities and relationships that represent all the information required to schedule and observe a fully calibratable observation on an SKA telescope.


Currently, the sole consumer of this library is the Observation Execution Tool (OET), the application which provides high-level scripting facilities and a high-level scripting UI for the SKA. The Python scripts run by the OET convert Scheduling Blocks, as modelled by this library, into Configuration Data Model (CDM) JSON payloads that configure and control the telescope.

### 2.1 Context

The implementation context is as follows: a design has been developed for the SKA Project Data Model (SPDM); the Minimum Viable Product (MVP) provides simulated implementations of all important SKA systems; a working version of the Observation Execution Tool (OET) is available.

In operation, the OET will be given a Scheduling Block (SB), the atomic unit of an observing program, and will run a script to execute it at the telescope.

The script executed under the OET will, among other things, parse the SB JSON and split the information into the Configuration Data Model (CDM) JSON components required to configure the telescope.

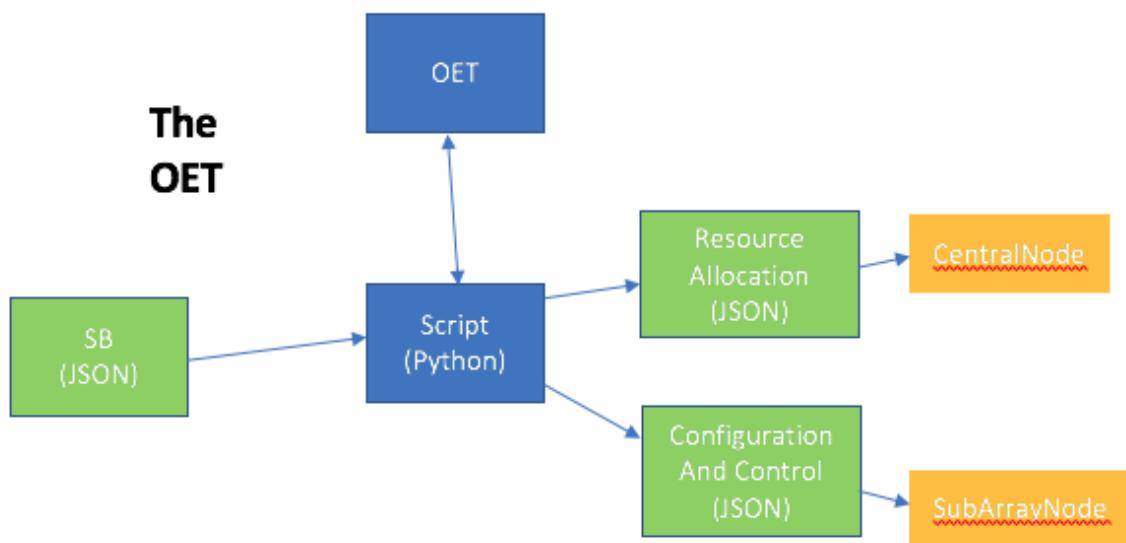

# CHAPTER 3

## Project layout

The PDM project contains two top-level packages, `ska_oso_pdm.entities` and `ska_oso_pdm.schemas` as shown in the figure below. The `ska_oso_pdm.entities` package contains Python object models for the logical entities in the SB data model. The `ska_oso_pdm.schemas` package contains code to transform the classes defined in `ska_oso_pdm.entities` to and from JSON.

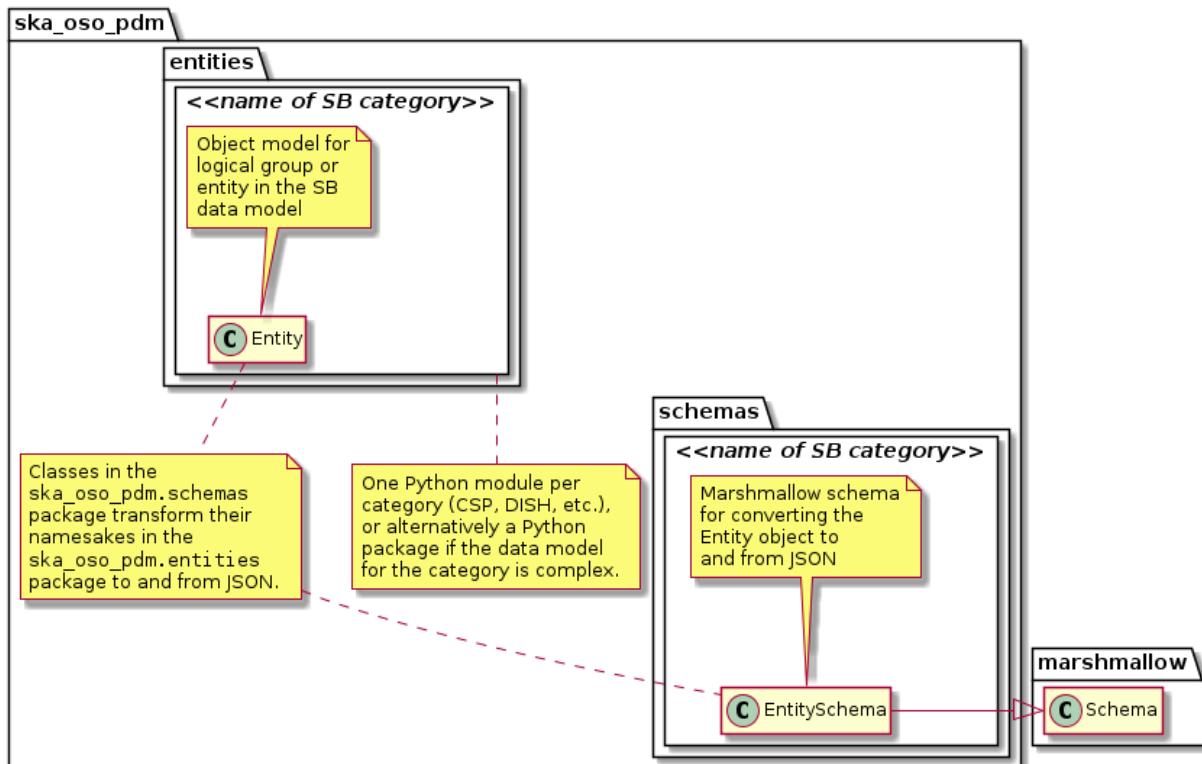


Fig. 1: Project layout and naming conventions.

The project layout and naming conventions are:

- The SB data model is divided into logical groups that collect related entities together.
- For each SB entity grouping, a corresponding Python module is created in `ska_oso_pdm.entities` and `ska_oso_pdm.schemas`. If the grouping is complex and contains many entities, the modules may be located inside a dedicated package for the group.
- Python classes representing the SB data model entities are found in the corresponding `ska_oso_pdm.entities` module/package.
- Marshmallow schema to transform `ska_oso_pdm.entities` objects to and from JSON are found in `ska_oso_pdm.schemas`.

## 3.1 Entities overview

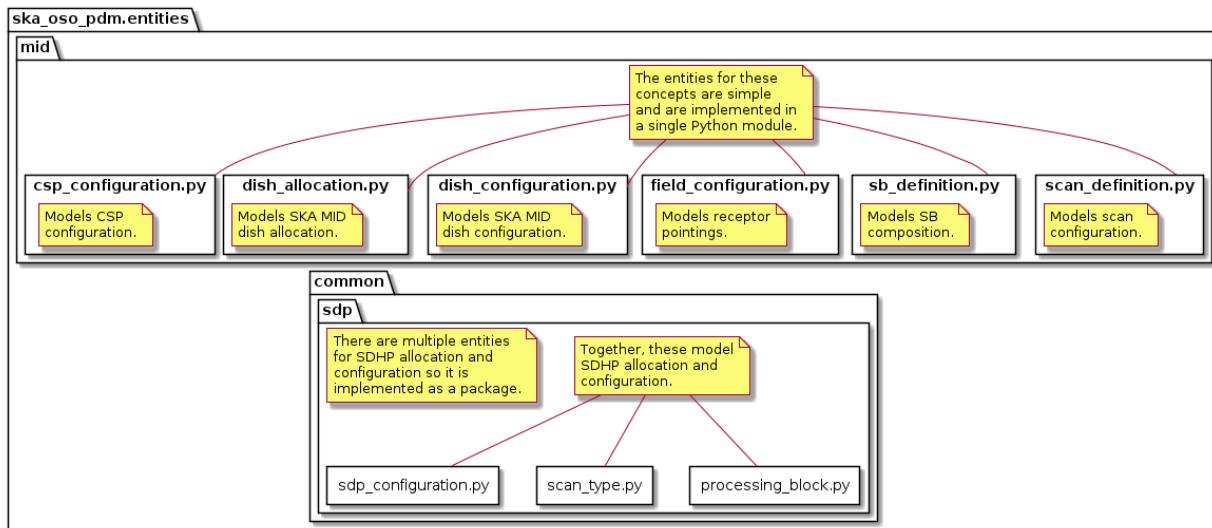


Fig. 2: Overview of PDM entities



The Python object model for the entities defined in the SB data model are located in the `ska_oso_pdm.entities` package. In general, each SB entity is represented as a Python class and each entity attribute presented as a class attribute or property.

PDM attributes can be typed as plain Python data types (strings, floats, etc.) or, where appropriate, represented by rich objects if this provides additional value to the client. For example, while astronomical coordinates are represented by floats and strings in the JSON schema, in the object model they are defined as Astropy `SkyCoord` instances to ensure correct coordinate handling and permit easier manipulation downstream. Similarly, quantities with units could be defined as instances of Astropy `Quantity` to provide additional functionality.

For details on the entities modelled by this library, see the pages within the API documentation.

## 3.2 Schemas overview

Classes to marshall the `ska_oso_pdm.messages` objects to and from JSON are defined in the `ska_oso_pdm.schemas` package. This project uses [Marshmallow](#) for JSON serialisation. Classes in the `ska_oso_pdm.schemas` define Marshmallow schemas which are used by Marshmallow during JSON conversion.

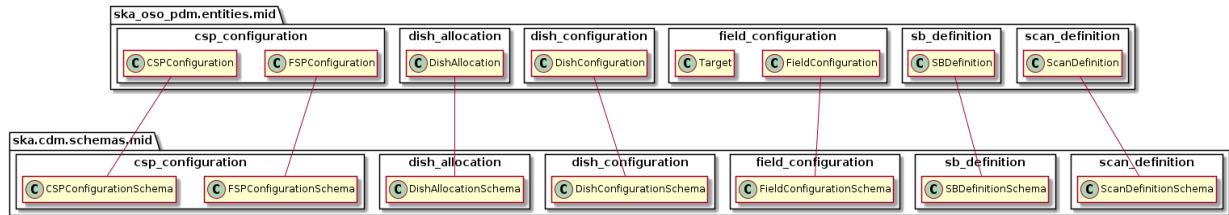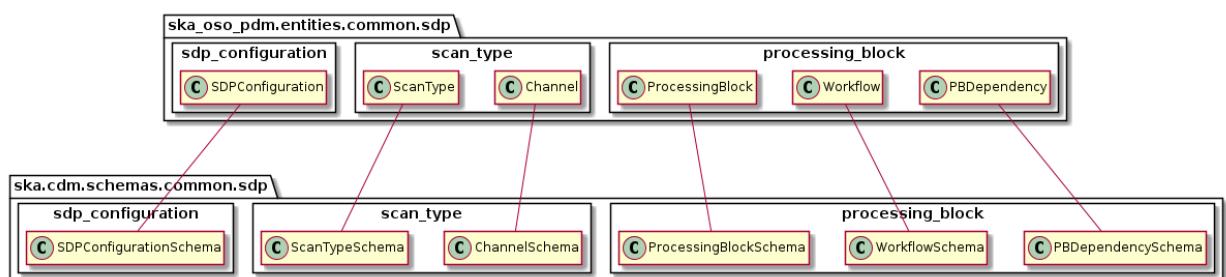Fig. 3: Schema mapping for `ska_oso_pdm.entities` packageFig. 4: Schema mapping for `ska_oso_pdm.entities.sdp` package



# CHAPTER 4

## JSON representation

### 4.1 MID JSON representation

A full example of a simple MID SB serialised to JSON is given below. This SBDefinition, identified as ‘sbi-mvp01-20200325-00001’, defines two field configurations identified as ‘science field’ and ‘calibrator field’ respectively. Field configuration ‘science field’ contains 2 sidereal targets, identified as beam #1 and beam #2 which point at two sidereal positions. Field configuration ‘calibrator field’ contains one target with ID ‘bandpass calibrator’ which points at Mars. Two scan definitions are defined: a scan identified as *calibrator scan*, which would observe the field *calibrator field* (=Mars) for 10 seconds, and a scan identified as *science scan*, which would observe the field *science field* (=beam #1 and beam #2) for 60 seconds. The scan\_sequence says to observe *calibrator scan*, *science scan*, *science scan*, *calibrator scan*, so the final observing sequence would be:

1. Observe Mars for 10 seconds
2. Observe beam #1 and beam #2 for 60 seconds
3. Observe beam #1 and beam #2 again for 60 seconds
4. Observe Mars for 10 seconds

SBDefinition also allows to optionally include SDP and CSP configurations.

```
{  
  "interface": "https://schema.skao.int/ska-oso-pdm-sbd/0.1",  
  "sbd_id": "sbi-mvp01-20200325-00001",  
  "telescope": "ska_mid",  
  "metadata": {  
    "version": 1,  
    "created_by": "Liz Bartlett",  
    "created_on": "2022-03-28T15:43:53.971548",  
    "last_modified_on": "2022-03-28T15:43:53.971548",  
    "last_modified_by": "Liz Bartlett"  
  },  
  "activities": {  
    "allocate": {
```

(continues on next page)

(continued from previous page)

```
"procedure_type": "filesystemscript",
"path": "/path/to/allocatescript.py",
"default_args": {
    "init": {
        "args": [
            "posarg1",
            "posarg2"
        ],
        "kwargs": {
            "argname": "argval"
        }
    },
    "run": {
        "args": [
            "posarg1",
            "posarg2"
        ],
        "kwargs": {
            "argname": "argval"
        }
    }
},
"observe": {
    "procedure_type": "gitscript",
    "path": "/relative/path/to/scriptinsiderepo.py",
    "repo": "https://gitlab.com/script_repo/operational_scripts",
    "branch": "main",
    "default_args": {
        "init": {
            "args": [
                "posarg1",
                "posarg2"
            ],
            "kwargs": {
                "argname": "argval"
            }
        },
        "run": {
            "args": [
                "posarg1",
                "posarg2"
            ],
            "kwargs": {
                "argname": "argval"
            }
        }
    }
},
"scan_definitions": [
{
    "scan_definition_id": "calibrator scan",
    "scan_duration": 60000,
    "field_configuration": "calibrator field",
    "dish_configuration": "dish config 123",
    "scan_type": "calibration_B",
}
```

(continues on next page)

(continued from previous page)

```

    "csp_configuration": "csp-mvp01-20220329-00001"
},
{
    "scan_duration": 60000,
    "field_configuration": "science field",
    "dish_configuration": "dish config 123",
    "scan_type": "science_A",
    "scan_definition_id": "science scan"
}
],
"scan_sequence": [
    "calibrator scan",
    "science scan",
    "science scan",
    "calibrator scan"
],
"field_configurations": [
{
    "field_id": "calibrator field",
    "targets": [
        {
            "target_id": "my calibrator target",
            "kind": "sidereal",
            "target_name": "Polaris Australis",
            "reference_frame": "ICRS",
            "ra": "21:08:47.92",
            "dec": "-88:57:22.9"
        }
    ]
},
{
    "field_id": "science field",
    "targets": [
        {
            "target_id": "my science target",
            "kind": "sidereal",
            "target_name": "Polaris Australis",
            "reference_frame": "ICRS",
            "ra": "21:08:47.92",
            "dec": "-88:57:22.9"
        }
    ]
}
],
"sdp_configuration": {
    "eb_id": "eb-mvp01-20200325-00001",
    "max_length": 100.0,
    "scan_types": [
    {
        "scan_type_id": "science_A",
        "target": "my science target",
        "channels": [
        {
            "count": 744,
            "start": 0,
            "stride": 2,
            "freq_min": 0.35e9,

```

(continues on next page)

(continued from previous page)

```
"freq_max": 0.368e9,
"link_map": [
  [
    [
      0,
      0
    ],
    [
      200,
      1
    ],
    [
      744,
      2
    ],
    [
      944,
      3
    ]
  ]
},
{
  "count": 744,
  "start": 2000,
  "stride": 1,
  "freq_min": 0.36e9,
  "freq_max": 0.368e9,
  "link_map": [
    [
      [
        2000,
        4
      ],
      [
        2200,
        5
      ]
    ]
  ]
},
{
  "scan_type_id": "calibration_B",
  "target": "my calibrator target",
  "channels": [
    {
      "count": 744,
      "start": 0,
      "stride": 2,
      "freq_min": 0.35e9,
      "freq_max": 0.368e9,
      "link_map": [
        [
          [
            0,
            0
          ],
          [
            200,
            1
          ]
        ]
      ]
    }
  ]
}
```

(continues on next page)

(continued from previous page)

```

        ],
        [
          744,
          2
        ],
        [
          944,
          3
        ]
      ]
    },
    {
      "count": 744,
      "start": 2000,
      "stride": 1,
      "freq_min": 0.36e9,
      "freq_max": 0.368e9,
      "link_map": [
        [
          [
            2000,
            4
          ],
          [
            2200,
            5
          ]
        ]
      ]
    }
  ],
  "processing_blocks": [
    {
      "pb_id": "pb-mvp01-20200325-00001",
      "workflow": {
        "name": "vis_receive",
        "kind": "realtime",
        "version": "0.1.0"
      },
      "parameters": {}
    },
    {
      "pb_id": "pb-mvp01-20200325-00002",
      "workflow": {
        "name": "test_receive_addresses",
        "kind": "realtime",
        "version": "0.3.2"
      },
      "parameters": {}
    },
    {
      "pb_id": "pb-mvp01-20200325-00003",
      "workflow": {
        "name": "ical",
        "kind": "batch",
        "version": "0.1.0"
      }
    }
  ]
}

```

(continues on next page)

(continued from previous page)

```
"parameters": {},
"dependencies": [
    {
        "pb_id": "pb-mvp01-20200325-00001",
        "kind": [
            "visibilities"
        ]
    }
],
{
    "pb_id": "pb-mvp01-20200325-00004",
    "workflow": {
        "name": "dpreb",
        "kind": "batch",
        "version": "0.1.0"
    },
    "parameters": {},
    "dependencies": [
        {
            "kind": [
                "calibration"
            ],
            "pb_id": "pb-mvp01-20200325-00003"
        }
    ]
},
"csp_configurations": [
    {
        "config_id": "csp-mvp01-20220329-00001",
        "subarray": {
            "subarray_name": "science period 23"
        },
        "common": {
            "subarray_id": 1,
            "band_5_tuning": [
                5.85,
                7.25
            ]
        },
        "cbf": {
            "fsp": [
                {
                    "fsp_id": 1,
                    "function_mode": "CORR",
                    "frequency_slice_id": 1,
                    "integration_factor": 1,
                    "zoom_factor": 0,
                    "channel_averaging_map": [
                        [
                            0,
                            2
                        ],
                        [
                            744,

```

(continues on next page)

(continued from previous page)

```

        0
    ],
],
"channel_offset": 0,
"output_link_map": [
    [
        0,
        0
    ],
    [
        200,
        1
    ]
],
{
    "fsp_id": 2,
    "function_mode": "CORR",
    "frequency_slice_id": 2,
    "integration_factor": 1,
    "zoom_factor": 1,
    "zoom_window_tuning": 650000
}
]
}
}
],
"dish_allocations": {
    "receptor_ids": [
        "0001",
        "0002"
    ]
},
"dish_configurations": [
{
    "dish_configuration_id": "dci_mvp01-20220329-00001",
    "receiver_band": "1"
}
]
}
}

```

## 4.2 LOW JSON representation

A full example of a simple SKA LOW SB serialised to JSON is given below. This LOW SBDefinition, identified as “sbi-mvp01-20200325-00001”, defines a MCCS subarray beam, *beam A*, composed of stations 1 and 2, configured to output on one channel block. One field consisting of two targets is defined. The targets are drift scan targets, at 45 degree and 85 degree elevation respectively. One subarray beam configuration is defined. If other scans required different subarray beam configurations, they would be defined here too. The SB then defines two target beam configurations that link subarray beam configurations to targets: each configuration points beam A at 45 degree elevation and 85 degree elevation targets respectively. Two scan definitions are defined that each perform a drift scan. The first is defined as the ‘calibrator scan’ that is using the subarray beam configuration for the first ‘target’ at 45 degrees elevation, the second is the ‘science scan’ which uses the same subarray beam configuration with the second target at 85 degrees. Finally, the scan sequence declares the observation to consist of four scans, with a calibrator scan bookending two science scans performed back-to-back.

```
{  
    "interface": "https://schema.skao.int/ska-oso-pdm-sbd/0.1",  
    "sbd_id": "sbi-mvp01-20200325-00001",  
    "telescope": "ska_low",  
    "metadata": {  
        "version": 1,  
        "created_by": "Liz Bartlett",  
        "created_on": "2022-03-28T15:43:53.971548"  
    },  
    "activities": {  
        "allocate": {  
            "procedure_type": "filesystemscript",  
            "path": "/path/to/allocatescript.py",  
            "default_args": {  
                "init": {  
                    "args": [  
                        "posarg1",  
                        "posarg2"  
                    ],  
                    "kwargs": {  
                        "argname": "argval"  
                    }  
                },  
                "run": {  
                    "args": [  
                        "posarg1",  
                        "posarg2"  
                    ],  
                    "kwargs": {  
                        "argname": "argval"  
                    }  
                }  
            }  
        },  
        "observe": {  
            "procedure_type": "gitscript",  
            "path": "/relative/path/to/scriptinsiderepo.py",  
            "repo": "https://gitlab.com/script_repo/operational_scripts",  
            "branch": "main",  
            "commit": "d234c257dadd18b3edcd990b8194c6ad94fc278a",  
            "default_args": {  
                "init": {  
                    "args": [  
                        "posarg1",  
                        "posarg2"  
                    ],  
                    "kwargs": {  
                        "argname": "argval"  
                    }  
                },  
                "run": {  
                    "args": [  
                        "posarg1",  
                        "posarg2"  
                    ],  
                    "kwargs": {  
                        "argname": "argval"  
                    }  
                }  
            }  
        }  
    }  
}
```

(continues on next page)

(continued from previous page)

```

        }
    }
}
},
"scan_definitions": [
{
    "scan_definition_id": "sbi-mvp01-20220328-00001",
    "scan_duration": 64000,
    "target_beam_configurations": [
        "target #1 with beam A config 1"
    ],
    "field_configuration": "target field"
},
{
    "scan_definition_id": "sbi-mvp01-20220328-00002",
    "scan_duration": 64000,
    "target_beam_configurations": [
        "target #2 with beam A config 1"
    ],
    "field_configuration": "target field"
}
],
"scan_sequence": [
    "sbi-mvp01-20220328-00001",
    "sbi-mvp01-20220328-00002",
    "sbi-mvp01-20220328-00002",
    "sbi-mvp01-20220328-00001"
],
"field_configurations": [
{
    "field_id": "target field",
    "targets": [
        {
            "target_id": "target #1",
            "kind": "driftscan",
            "target_name": "Drift scan at 45 degs",
            "reference_frame": "HORIZON",
            "az": 180.0,
            "el": 45.0
        },
        {
            "target_id": "target #2",
            "kind": "driftscan",
            "target_name": "Drift scan at 85 degs",
            "reference_frame": "HORIZON",
            "az": 180.0,
            "el": 85.0
        }
    ]
}
],
"mccs_allocation": {
    "subarray_beam_ids": [
        "beam A"
    ],
    "station_ids": [

```

(continues on next page)

(continued from previous page)

```
[  
    [  
        1,  
        2  
    ]  
,  
    "channel_blocks": [  
        1  
    ]  
,  
    "target_beam_configurations": [  
        {  
            "target_beam_id": "target #1 with beam A config 1",  
            "target": "target #1",  
            "subarray_beam_configuration": "beam A config 1"  
        },  
        {  
            "target_beam_id": "target #2 with beam A config 1",  
            "target": "target #2",  
            "subarray_beam_configuration": "beam A config 1"  
        }  
    ],  
    "subarray_beam_configurations": [  
        {  
            "subarray_beam_configuration_id": "beam A config 1",  
            "subarray_beam_id": "beam A",  
            "update_rate": 0.0,  
            "antenna_weights": [  
                1.0,  
                1.0,  
                1.0  
            ],  
            "phase_centre": [  
                0.0,  
                0.0  
            ],  
            "channels": [  
                [  
                    0,  
                    8,  
                    1,  
                    1  
                ],  
                [  
                    8,  
                    8,  
                    2,  
                    1  
                ]  
            ]  
        }  
    ]  
}
```

# CHAPTER 5

## ska\_oso\_pdm.entities.common

The common package contains modules and packages that model entities common to MID and LOW Scheduling Blocks. The contents of the module are presented in the diagram below.

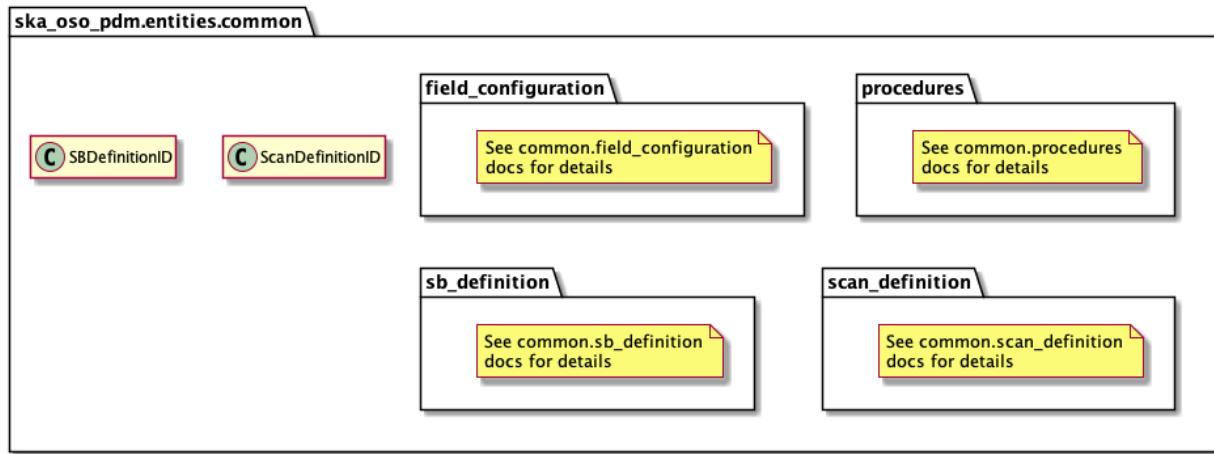


Fig. 1: Class diagram for the `__init__` module



# CHAPTER 6

## ska\_oso\_pdm.entities.common.field\_configuration

The field\_configuration module models SB data model entities concerned with receptor pointing and mapping (source coordinates, survey fields, etc.). The contents of the module are presented in the diagram below.

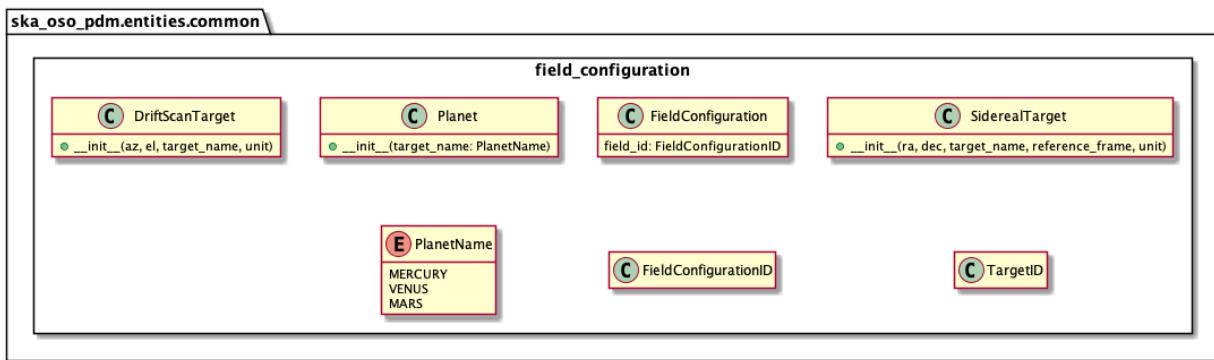


Fig. 1: Class diagram for the field\_configuration module

An example serialisation of this model to JSON is shown below.

```
# JSON modelled specifically by field_configuration
...
"field_configurations": [
  {
    "field_id": "science fields",
    "targets": [
      {
        "target_id": "my first science target",
        "kind": "SiderealTarget",
        "target_name": "NGC6251",
        "reference_frame": "ICRS",
        "ra": "23:45:45.67",
        "dec": "-21:23:45.67"
      }
    ]
  }
]
```

(continues on next page)

(continued from previous page)

```
        },
        {
            "target_id": "my second science target",
            "kind": "SiderealTarget",
            "target_name": "M51",
            "reference_frame": "ICRS",
            "ra": "23:45:45.93",
            "dec": "-21:23:44.92"
        }
    ]
}
],
...
```

Another JSON example with DriftScan target is shown below.

```
...
"field_configurations": [
{
    "field_id": "target field",
    "targets": [
        {
            "target_id": "target #1",
            "kind": "driftscan",
            "target_name": "Drift scan at 45 degs",
            "reference_frame": "HORIZON",
            "az": 180.0,
            "el": 45.0
        },
        {
            "target_id": "target #2",
            "kind": "driftscan",
            "target_name": "Drift scan at 85 degs",
            "reference_frame": "HORIZON",
            "az": 180.0,
            "el": 85.0
        }
    ]
},
...
]
```

The entities.common.field\_configuration module defines a Python representation of the target of the observation.

```
class FieldConfiguration(field_id: Optional[str] = None, targets: Optional[Sequence[ska_oso_pdm.entities.common.field_configuration.Target]] = None)
```

FieldConfiguration represents the argument for SKA scheduling block.

```
FieldConfigurationID  
alias of builtins.str
```

```
class SiderealTarget(ra: Union[float, str], dec: Union[float, str], target_name: Optional[str] = None, reference_frame: Optional[str] = 'icrs', target_id: Optional[str] = None, unit: Union[str, Tuple[str, str]] = ('hourangle', 'deg'))
```

SiderealTarget represents the argument for SKA scheduling block.

```
coord
```

abstract method : Target encapsulates source coordinates and source metadata.

**class DriftScanTarget** (*az: float, el: float, target\_name: Optional[str] = None, target\_id: Optional[str] = None, unit: str = 'deg'*)  
DriftScanTarget defines AltAz target for SKA scheduling block.

**coord**  
abstract method : Target encapsulates source coordinates and source metadata.

**class Planet** (*target\_name: ska\_oso\_pdm.entities.common.field\_configuration.PlanetName, target\_id: Optional[str] = None*)  
Planet represents the argument for SKA scheduling block.

**coord**  
abstract method : Target encapsulates source coordinates and source metadata.

**class PlanetName**  
PlanetName represents name of the planet.

**TargetID**  
alias of builtins.str



# CHAPTER 7

## ska\_oso\_pdm.entities.common.procedures

The procedures modules models SB entities concerned with the script execution requirements. This includes the scripts that should process the SB and the git identifier, including the repository and branch. The contents of the modules are presented in the diagram below.

An example serialisation of this model to JSON is shown below.

```
# JSON modelled specifically by procedures
...
"activities": {
    "allocate": {
        "procedure_type": "filesystemscript",
        "path": "/path/to/allocatescript.py",
        "default_args": {
            "init": {"args": ["posarg1", "posarg2"],
                     "kwargs": {"argname": "argval"}},
            "run": {"args": ["posarg1", "posarg2"],
                    "kwargs": {"argname": "argval"}}
        }
    },
    "observe": {
        "procedure_type": "gitscript",
        "path": "/relative/path/to/scriptinsiderepo.py",
        "repo": "https://gitlab.com/script_repo/operational_scripts",
        "branch": "main",
        "default_args": {
            "init": {"args": ["posarg1", "posarg2"],
                     "kwargs": {"argname": "argval"}},
            "run": {"args": ["posarg1", "posarg2"],
                    "kwargs": {"argname": "argval"}}
        }
    }
},
```

(continues on next page)

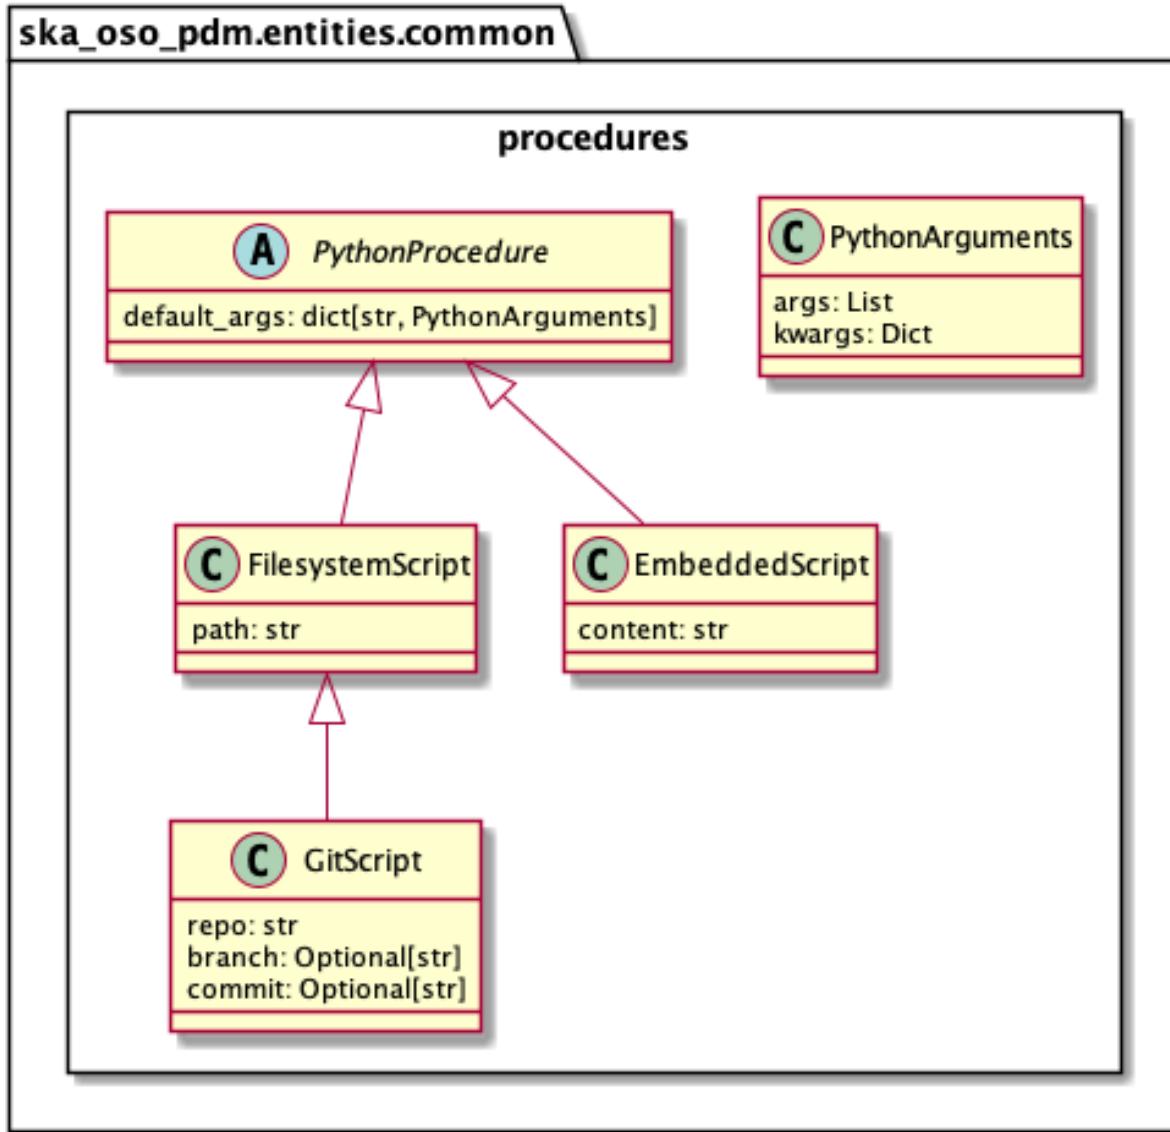


Fig. 1: Class diagram for the procedure module

(continued from previous page)

```
        "kwargs": {"argname": "argval"
    }
}
}
}
```

The entities.common.procedures module defines a Python representation of the procedures listed in the activities of the SKA scheduling block.

**class EmbeddedScript** (*content: str, default\_args: Dict[str, ska\_oso\_pdm.entities.common.procedures.PythonArguments] = None*)

Represents an EmbeddedScript to be ran as an activity in an SKA scheduling block.

**class FileSystemScript** (*path: str, default\_args: Dict[str, ska\_oso\_pdm.entities.common.procedures.PythonArguments] = None*)

Represents an FileSystemScript to be ran as an activity in an SKA scheduling block.

**class GitScript** (*repo: str, path: str, branch: Optional[str] = None, commit: Optional[str] = None, default\_args: Dict[str, ska\_oso\_pdm.entities.common.procedures.PythonArguments] = None*)

Represents an GitScript to be ran as an activity in an SKA scheduling block.



# CHAPTER 8

## ska\_oso\_pdm.entities.common.sb\_definition

The sb\_definition module models SB data model entities concerned with the high-level composition of a Scheduling Block. An SB defines everything needed to schedule and perform an observation, for instance:

- Target telescope
- Dish allocations to sub-arrays (for SKA MID);
- Dish configurations (receiver bands, etc., for SKA MID);
- MCCS resource allocations to sub-arrays (for SKA LOW);
- Sub-array Beam configurations (channels, antenna weights etc., for SKA LOW);
- Target Beam configuration, defining the required Target for subarray beam configuration (for SKA LOW);
- Targets and field positions, describing which points to observe on the sky;
- CSP (Central Signal Processing) correlator configurations to be used;
- SDHP configuration, defining the required pipeline workflows for the observation;
- Scan information, which describes which CSP/SDHP/dish/target configurations to be used for each scan;
- Scan sequence describing the sequence of scans constituting the observation.

as well as:

- SB metadata (author, creation date and version number, as well as edit history);
- SB script execution requirements;

The contents of the module are presented in the diagram below.

```
# JSON modelled specifically by sb_definition
{
    "sbd_id": "sbi-mvp01-20200325-00001",
    "telescope": "ska_mid",
    "interface": "https://schema.skao.int/ska-oso-pdm-sbd/0.1",
    "metadata": {
        "version": 1,
```

(continues on next page)

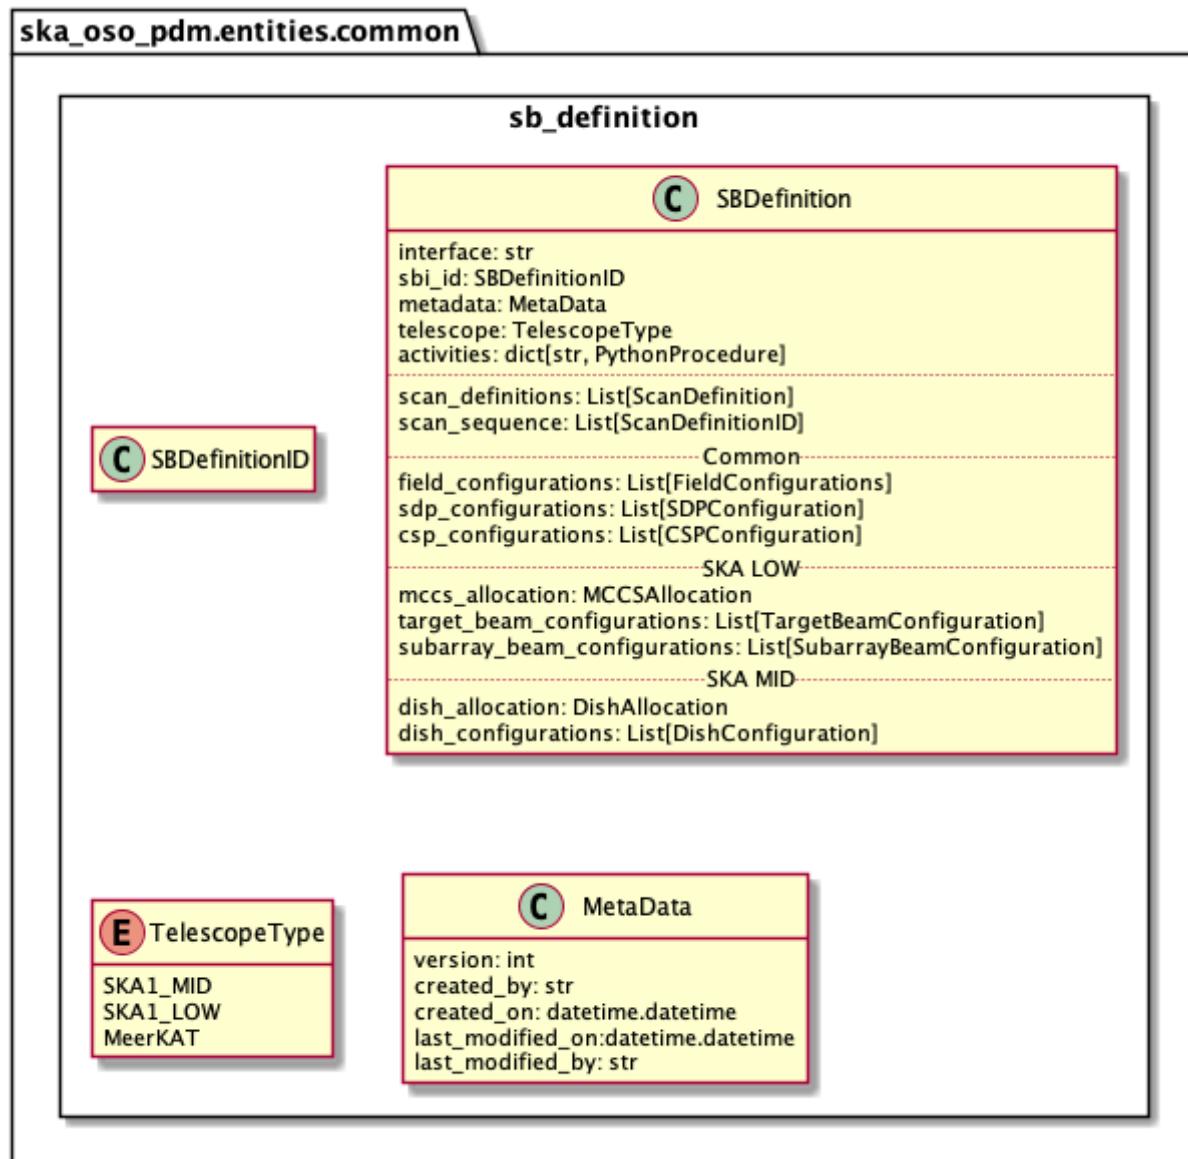


Fig. 1: Class diagram for the sb\_definition module

(continued from previous page)

```

    "created_by": "Liz Bartlett",
    "created_on": "2022-03-28T15:43:53.971548",
    "last_modified_on": null,
    "last_modified_by": null
  }
  "activities": ...,
  "dish_allocations": ...,
  "csp_configurations": ...,
  "dish_configurations": ...,
  "field_configurations": ...,
  "sdp_configuration": ...,
  "scan_definitions": ...,
  "scan_sequence": [
    "A", "B", "B", "A"
  ]
}

```

The entities.scheduling\_block\_entity module defines a simple Python representation of the scheduling block that contains the details of the observation

```

class SBDefinition(*, interface: Optional[str] = 'https://schema.skao.int/ska-oso-pdm-sbd/0.1', sbd_id: Optional[str] = None, telescope: Optional[ska_oso_pdm.entities.common.sb_definition.TelescopeType] = None, metadata: Optional[ska_oso_pdm.entities.common.sb_definition.MetaData] = None, activities: Optional[Dict[str, ska_oso_pdm.entities.common.procedures.PythonProcedure]] = None, field_configurations: Optional[List[ska_oso_pdm.entities.common.field_configuration.FieldConfiguration]] = None, scan_definitions: Optional[List[ska_oso_pdm.entities.common.scan_definition.ScanDefinition]] = None, scan_sequence: Optional[List[str]] = None, sdp_configuration: Optional[ska_oso_pdm.entities.sdp.sdp_configuration.SDPConfiguration] = None, dish_configurations: Optional[List[ska_oso_pdm.entities.dish.dish_configuration.DishConfiguration]] = None, csp_configurations: Optional[List[ska_oso_pdm.entities.csp.common.CSPConfiguration]] = None, dish_allocations: Optional[ska_oso_pdm.entities.dish.dish_allocation.DishAllocation] = None, mccs_allocation: Optional[ska_oso_pdm.entities.mccs.mccs_allocation.MCCSAllocation] = None, subarray_beam_configurations: Optional[List[ska_oso_pdm.entities.mccs.subarray_beam_configuration.SubarrayBeamConfiguration]] = None, target_beam_configurations: Optional[List[ska_oso_pdm.entities.mccs.target_beam_configuration]] = None)

```

SKA scheduling block

```

class TelescopeType
TelescopeType represents which telescope is being used

```

```

class MetaData(*, version: Optional[int] = 1, created_on: Optional[datetime.datetime] = None, created_by: Optional[str] = None, last_modified_on: Optional[datetime.datetime] = None, last_modified_by: Optional[str] = None)

```

MetaData Class



# CHAPTER 9

## ska\_oso\_pdm.entities.common.scan\_definition

The scan\_definition module models SB entities concerned with the selection of which element configurations should take effect for the duration of a scan. The contents of the module are presented in the diagram below.

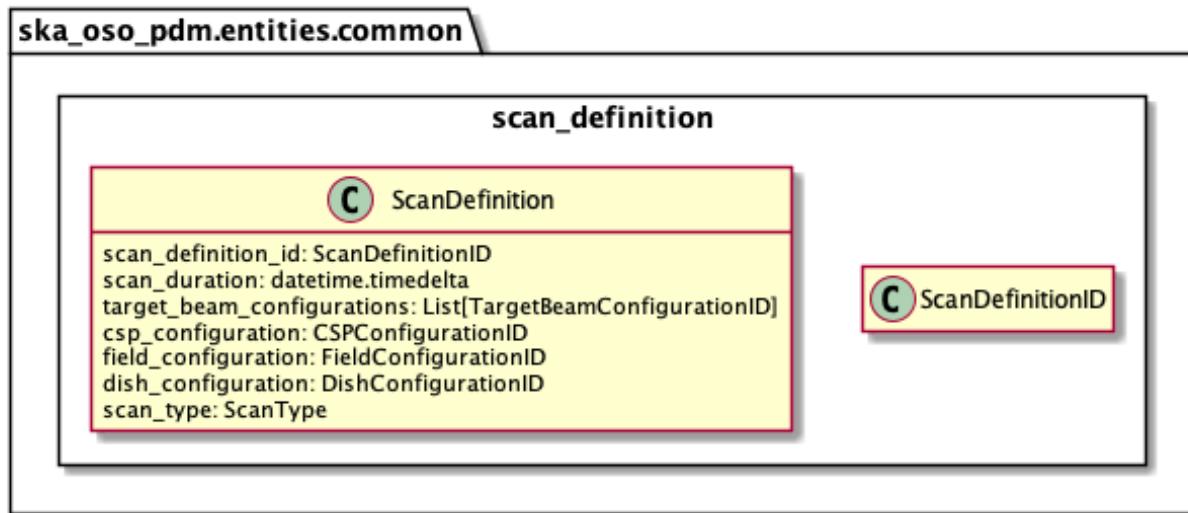


Fig. 1: Class diagram for the scan\_definition module

An example serialisation of this model to JSON for SKA MID is shown below.

```
# JSON modelled specifically by scan_definition
...
"scan_definitions": [
{
    "scan_definition_id": "calibrator scan",
    "scan_duration": 60000,
    "field_configuration": "calibrator field",
    "dish_configuration": "dish config 123",
}
```

(continues on next page)

(continued from previous page)

```
        "scan_type": "calibration_B",
        "csp_configuration": "csp-mvp01-20220329-00001"
    },
    {
        "scan_duration": 60000,
        "field_configuration": "science field",
        "dish_configuration": "dish config 123",
        "scan_type": "science_A",
        "scan_definition_id": "science scan"
    }
],
```

A JSON code example for SKA LOW is shown below.

```
# JSON modelled specifically by scan_definition

"scan_definitions": [
    {
        "scan_definition_id": "sbi-mvp01-20220328-00001",
        "scan_duration": 64000,
        "target_beam_configurations": [
            "target #1 with beam A config 1"
        ],
    }
],
```

The entities.scan\_definition\_entity module defines simple Python representation of a single observation scan

```
class ScanDefinition(scan_definition_id: Optional[str], scan_duration: datetime.timedelta,
                     field_configuration_id: str, target_beam_configuration_ids: Optional[List[str]] = None,
                     dish_configuration_id: Optional[str] = None, scan_type_id: Optional[str] = None,
                     csp_configuration_id: Optional[str] = None)
```

ScanDefinition represents the instrument configuration for a single scan.

```
ScanDefinitionID
alias of builtins.str
```

# CHAPTER 10

## ska\_oso\_pdm.entities.csp.common

The csp.common module models SB entities concerned with CSP (Central Signal Processing) beam former and correlator configuration. The contents of the module are presented in the diagram below.

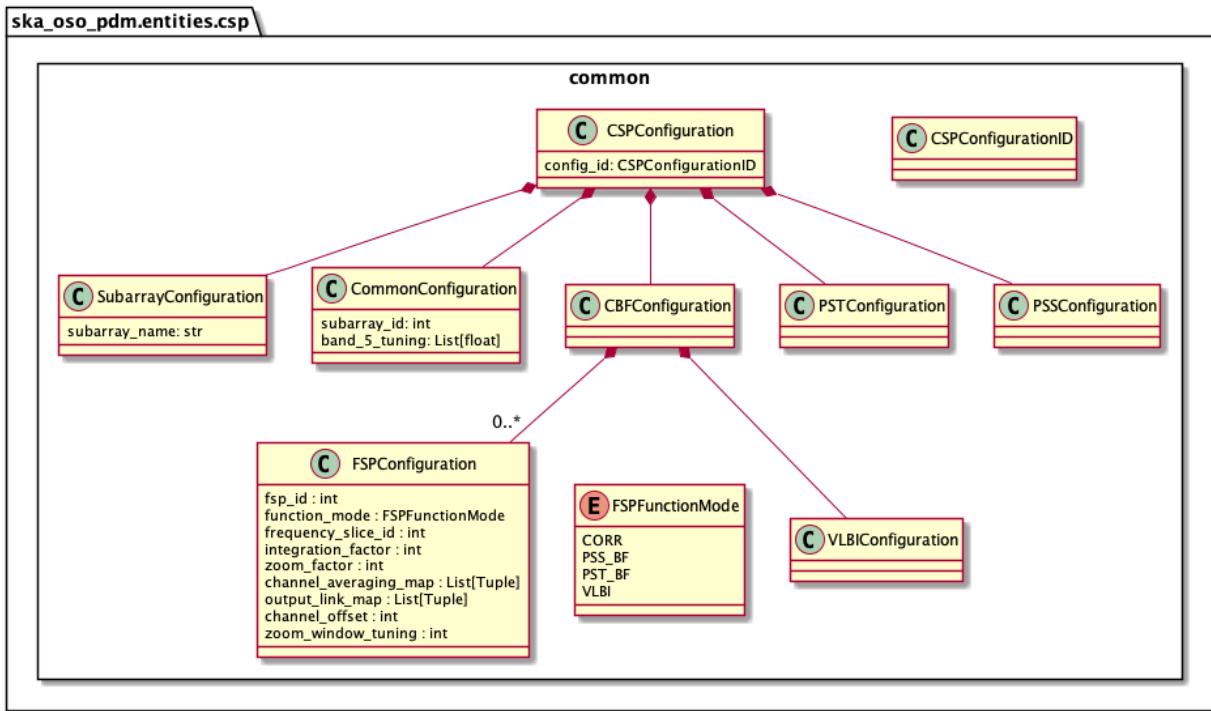


Fig. 1: Class diagram for the common module within csp

An example serialisation of this model to JSON is shown below.

```
# JSON modelled specifically by csp_configuration
...
"csp_configurations": [
    "config_id": "csp-mvp01-20220329-00001",
    "subarray": {"subarray_name": "science period 23"},
    "common": {
        "subarray_id": 1,
        "band_5_tuning": [5.85, 7.25]
    },
    "cbf": {
        "fsp": [
            {
                "fsp_id": 1,
                "function_mode": "CORR",
                "frequency_slice_id": 1,
                "integration_factor": 1,
                "zoom_factor": 0,
                "channel_averaging_map": [[0, 2], [744, 0]],
                "channel_offset": 0,
                "output_link_map": [[0, 0], [200, 1]]
            },
            {
                "fsp_id": 2,
                "function_mode": "CORR",
                "frequency_slice_id": 2,
                "integration_factor": 1,
                "zoom_factor": 1,
                "zoom_window_tuning": 650000
            }
        ]
    }
],
...
]
```

The entities.csp\_configuration module defines a simple Python representation of CSP and FSP configurations.

```
class CSPConfiguration(config_id: str = None, subarray_config: ska_oso_pdm.entities.csp.common.SubarrayConfiguration = None, common_config: ska_oso_pdm.entities.csp.common.CommonConfiguration = None, cbf_config: ska_oso_pdm.entities.csp.common.CBFConfiguration = None, pst_config: ska_oso_pdm.entities.csp.common.PSTConfiguration = None, pss_config: ska_oso_pdm.entities.csp.common.PSSConfiguration = None)
    Class to hold all CSP configuration.

CSPConfigurationID
alias of builtins.str

class FSPConfiguration(fsp_id: int, function_mode: ska_oso_pdm.entities.csp.common.FSPFunctionMode, frequency_slice_id: int, integration_factor: int, zoom_factor: int, channel_averaging_map: List[Tuple] = None, output_link_map: List[Tuple] = None, channel_offset: int = None, zoom_window_tuning: int = None)
    FSPConfiguration defines the configuration for a CSP Frequency Slice Processor.

class FSPFunctionMode
    FSPFunctionMode is an enumeration of the available FSP modes.

class CBFConfiguration(fsp_configs: List[ska_oso_pdm.entities.csp.common.FSPConfiguration], vlbci_config: Optional[ska_oso_pdm.entities.csp.common.VLBIConfiguration] = None)
```

Class to hold all FSP and VLBI configurations.

```
class SubarrayConfiguration(subarray_name: str)
```

Class to hold the parameters relevant only for the current sub-array device.

```
class CommonConfiguration(subarray_id: Optional[int] = None, band_5_tuning: Optional[List[float]] = None)
```

Class to hold the CSP sub-elements.



# CHAPTER 11

---

## ska\_oso\_pdm.entities.sdp


---

The sdp package contains modules that model SB entities concerned with SDHP resource allocation and pipeline workflow configuration. The contents of the module are presented in the diagram below.

An example serialisation of this model to JSON is shown below.

```
# JSON modelled specifically by entities in the sdp package
...
"sdp_configuration": {
    "eb_id": "eb-mvp01-20200325-00001",
    "max_length": 100.0,
    "scan_types": [
        {
            "scan_type_id": "science_A",
            "target": "my science target",
            "channels": [
                {
                    "count": 744,
                    "start": 0,
                    "stride": 2,
                    "freq_min": 0.35e9,
                    "freq_max": 0.368e9,
                    "link_map": [[0,0],[200,1],[744,2],[944,3]]
                },
                {
                    "count": 744,
                    "start": 2000,
                    "stride": 1,
                    "freq_min": 0.36e9,
                    "freq_max": 0.368e9,
                    "link_map": [[2000,4],[2200,5]]
                }
            ],
            "scan_type_id": "calibration_B",
            "target": "my calibrator target",
            "channels": [
                {
                    "count": 744,
                    "start": 0,
```

(continues on next page)

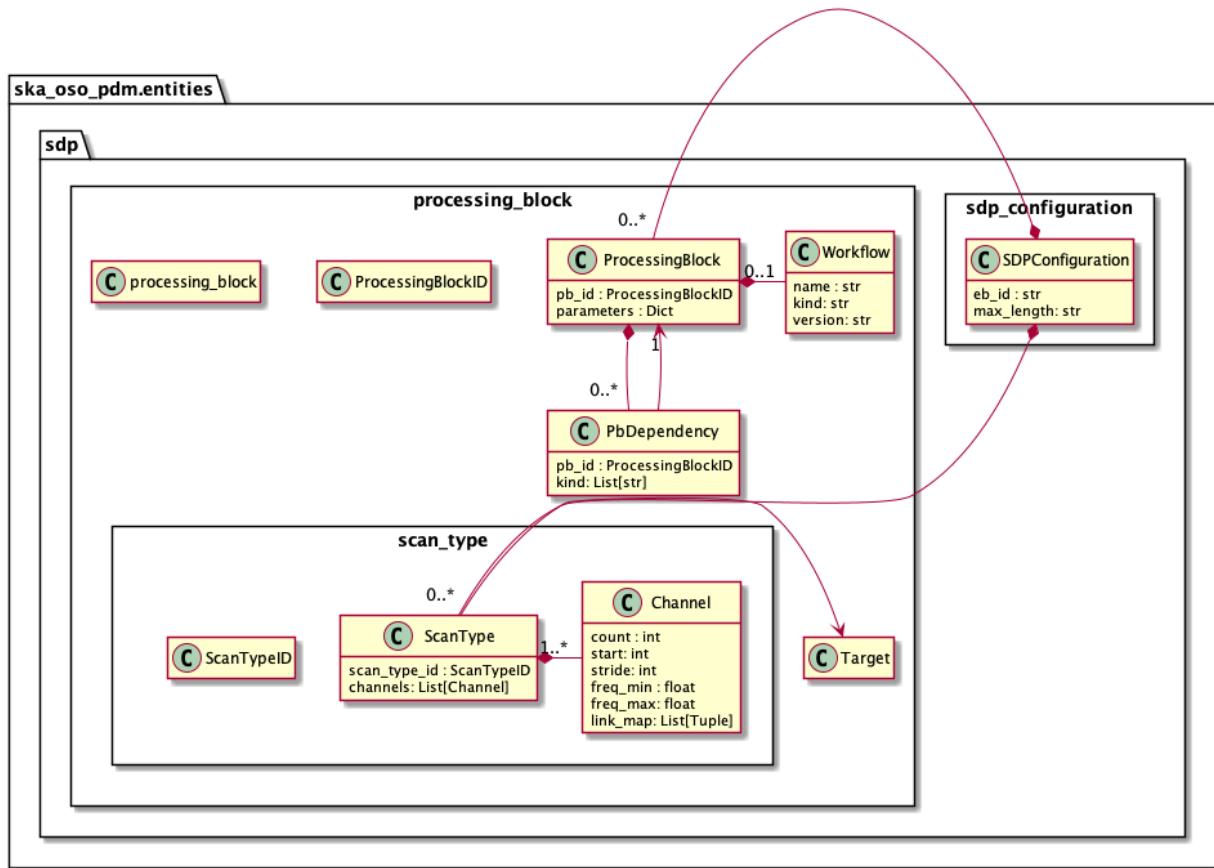Fig. 1: Class diagram for the `sdp` package

(continued from previous page)

```

        "stride": 2,
        "freq_min": 0.35e9,
        "freq_max": 0.368e9,
        "link_map": [[0,0],[200,1],[744,2],[944,3]]
    },
    {
        "count": 744,
        "start": 2000,
        "stride": 1,
        "freq_min": 0.36e9,
        "freq_max": 0.368e9,
        "link_map": [[2000,4],[2200,5]]
    }]],
    "processing_blocks": [
        {
            "pb_id": "pb-mvp01-20200325-00001",
            "workflow": {
                "name": "vis_receive",
                "kind": "realtime",
                "version": "0.1.0"
            },
            "parameters": {}
        },
        {
            "pb_id": "pb-mvp01-20200325-00002",
            "workflow": {
                "name": "test_receive_addresses",
                "kind": "realtime",
                "version": "0.3.2"
            },
            "parameters": {}
        },
        {
            "pb_id": "pb-mvp01-20200325-00003",
            "workflow": {
                "name": "ical",
                "kind": "batch",
                "version": "0.1.0"
            },
            "parameters": {},
            "dependencies": [
                {
                    "pb_id": "pb-mvp01-20200325-00001",
                    "kind": ["visibilities"]
                }
            ]
        },
        {
            "pb_id": "pb-mvp01-20200325-00004",
            "workflow": {
                "name": "dpred",
                "kind": "batch",
                "version": "0.1.0"
            },
            "parameters": {},
            "dependencies": [
                {
                    "kind": ["calibration"],
                    "pb_id": "pb-mvp01-20200325-00003"
                }
            ]
        }
    ]
}

```

(continues on next page)

(continued from previous page)

```

        ],
    },

    "sdpConfiguration": {
        "eb_id": "eb-mvp01-20200325-00001",
        "max_length": 100.0,
        "scan_types": [
            {
                "scan_type_id": "science_A",
                "target": "beam #1",
                "channels": [
                    {
                        "count": 744, "start": 0, "stride": 2,
                        "freq_min": 0.35e9,
                        "freq_max": 0.368e9,
                        "link_map": [[0, 0], [200, 1], [744, 2], [944, 3]]
                    },
                    {
                        "count": 744, "start": 2000, "stride": 1,
                        "freq_min": 0.36e9,
                        "freq_max": 0.368e9,
                        "link_map": [[2000, 4], [2200, 5]]
                    }
                ],
            },
            {
                "scan_type_id": "calibration_B",
                "target": "bandpass calibrator",
                "channels": [
                    {
                        "count": 744, "start": 0, "stride": 2,
                        "freq_min": 0.35e9,
                        "freq_max": 0.368e9,
                        "link_map": [[0, 0], [200, 1], [744, 2], [944, 3]]
                    },
                    {
                        "count": 744, "start": 2000, "stride": 1,
                        "freq_min": 0.36e9,
                        "freq_max": 0.368e9,
                        "link_map": [[2000, 4], [2200, 5]]
                    }
                ],
            }
        ],
        "processing_blocks": [
            {
                "pb_id": "pb-mvp01-20200325-00001",
                "workflow": {"name": "vis_receive", "kind": "realtime", "version": "0.1.0"},
                "parameters": {}
            },
            {
                "pb_id": "pb-mvp01-20200325-00003",
                "workflow": {"name": "ical", "kind": "batch", "version": "0.1.0"},
                "parameters": {},
                "dependencies": [
                    {"pb_id": "pb-mvp01-20200325-00001", "kind": ["visibilities"]}
                ]
            }
        ]
    }
}

```

(continues on next page)

(continued from previous page)

```
},  
...
```

The `ska_oso_pdm.entities.common.sdp.sdp_configuration` module defines a Python object model for the SDP configuration JSON string passed to `CentralNode.AssignResources`.

```
class SDPConfiguration(eb_id: str, max_length: float, scan_types: List[ska_oso_pdm.entities.sdp.scan_type.ScanType], processing_blocks: List[ska_oso_pdm.entities.sdp.processing_block.ProcessingBlock])
```

`SDPConfiguration` captures the SDP resources and pipeline configuration required to process an execution block.

The `entities.sdp.scan_type` module defines a Python representation of a scan type for SDP configuration.

```
class ScanType(scan_type_id: str, target_id: str, channels: List[ska_oso_pdm.entities.sdp.scan_type.Channel])
```

Class to hold `ScanType` configuration

```
ScanTypeID
```

alias of `builtins.str`

```
class Channel(count: int, start: int, stride: int, freq_min: float, freq_max: float, link_map: List[Tuple])
```

Class to hold Channels for `ScanType`

The `entities.sdp.processing_block` module defines a Python representation of a processing block for SDP configuration.

```
class Workflow(name: str, kind: str, version: str)
```

Class to hold Workflow for `ProcessingBlock`

```
class ProcessingBlock(pb_id: str, workflow: ska_oso_pdm.entities.sdp.processing_block.Workflow,
```

```
parameters: Dict[KT, VT], dependencies: List[ska_oso_pdm.entities.sdp.processing_block.PbDependency] = None)
```

Class to hold `ProcessingBlock` configuration

```
class PbDependency(pb_id: str, kind: List[str])
```

Class to hold Dependencies for `ProcessingBlock`



# CHAPTER 12

## ska\_oso\_pdm.entities.dish.dish\_allocation

The dish\_allocation module defines which SKA MID dishes should be allocated to a sub-array prior to an observation.

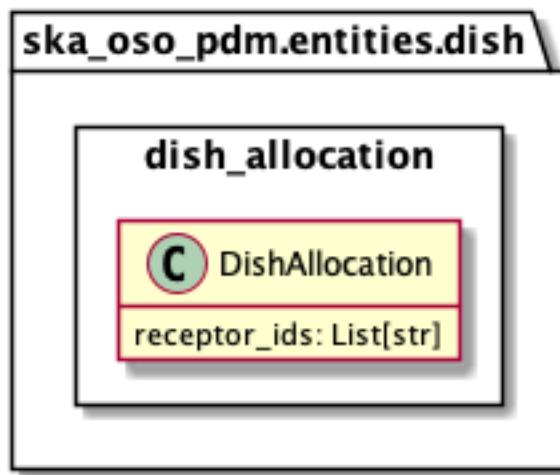


Fig. 1: Class diagram for the dish\_allocation module

An example serialisation of this model to JSON is shown below.

```
# JSON modelled specifically by dish_allocation
...
"dish_allocations": {
    "receptor_ids": ["0001", "0002"]
},
...
```

The messages module provides simple Python representations of the structured request and response for the TMC CentralNode.AssignResources command.

```
class DishAllocation(receptor_ids: Optional[List[str]] = None)
```

DishAllocation represents the DISH allocation part of an AssignResources request and response.

# CHAPTER 13

## ska\_oso\_pdm.entities.dish.dish\_configuration

The dish\_configuration module models SB entities concerned with SKA MID dish configuration.

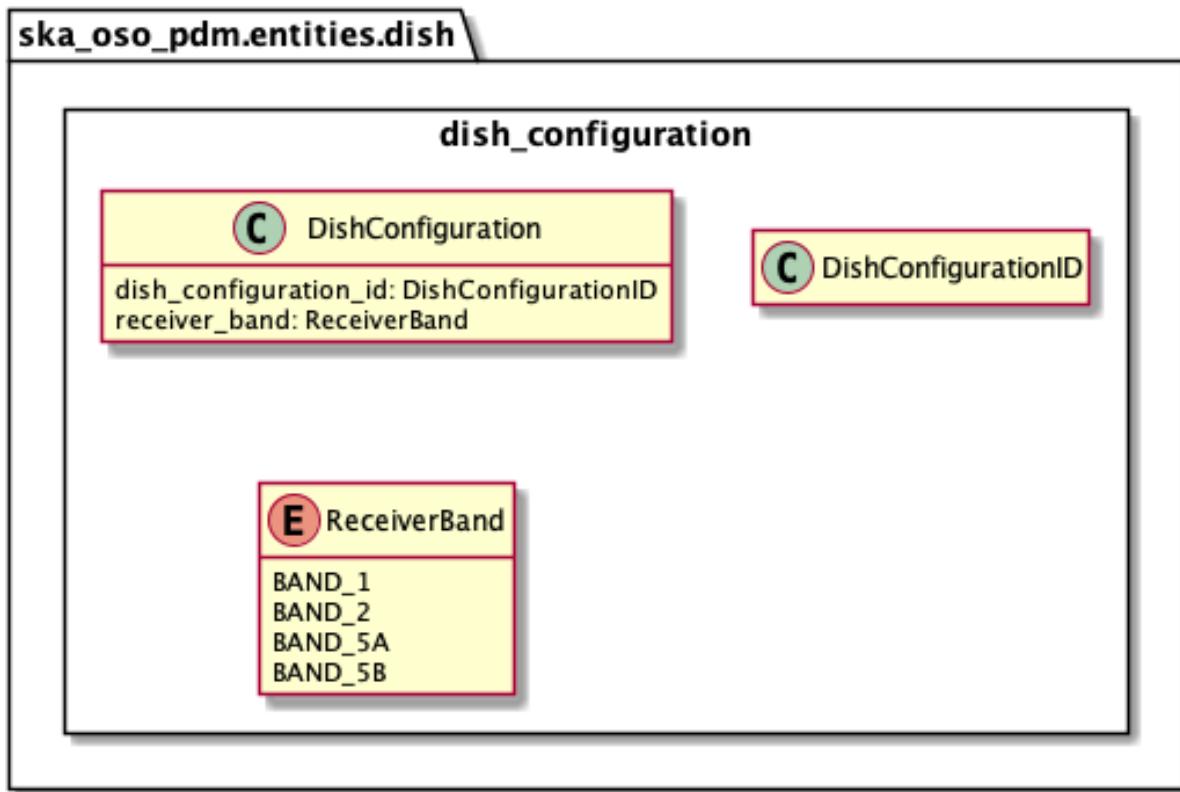


Fig. 1: Class diagram for the dish\_configuration module

An example serialisation of this model to JSON is shown below.

```
# JSON modelled specifically by dish_configuration
...
"dish_configurations" : [
    {
        "dish_configuration_id": "dci_mvp01-20220329-00001",
        "receiver_band" : "1"
    }
],
...
```

The entities.dish\_configuration module defines simple Python representation of how SKA MID dishes in sub-array should be configured.

**DishConfigurationID**  
alias of builtins.str

**class ReceiverBand**  
ReceiverBand is an enumeration of SKA MID receiver bands.

**class DishConfiguration(dish\_configuration\_id: str, receiver\_band: ska\_oso\_pdm.entities.dish.dish\_configuration.ReceiverBand)**

DishConfiguration specifies how SKA MID dishes in a sub-array should be configured. At the moment, this is limited to setting the receiver band.

# CHAPTER 14

## ska\_oso\_pdm.entities.mccs.mccs\_allocation

The mccs\_allocation module defines which SKA LOW stations should be allocated to a sub-array beam prior to an observation.

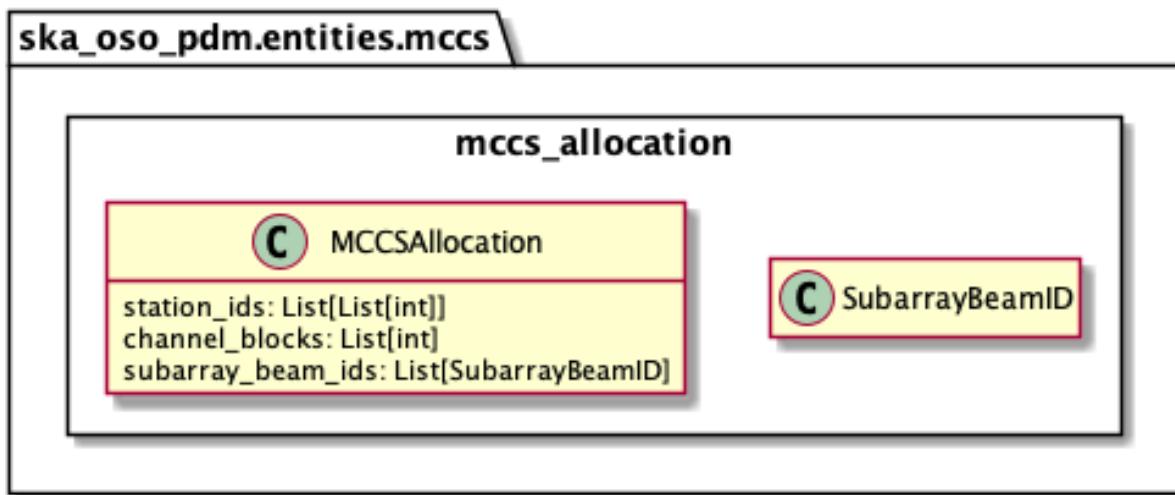


Fig. 1: Class diagram for the mccs\_allocation module

An example serialisation of this model to JSON is shown below.

```
# JSON modelled specifically by mccs_allocation
...
"mccs_allocation": {
    "subarray_beam_ids": ["Beam A"],
    "station_ids": [[1,2]],
    "channel_blocks": [3]
},
...
```

The entities module provides simple Python representations of the structured request and response for the TMC CentralNode.AssignResources command.

```
class MCCSAllocation(station_ids: List[List[int]], channel_blocks: List[int], subarray_beam_ids:  
    List[str])
```

MCCSAllocation is a Python representation of the MCCS allocation segment of a scheduling block.

**SubarrayBeamID**

alias of builtins.str

# CHAPTER 15

## ska\_oso\_pdm.entities.mccs.subarray\_beam\_configuration

The subarray\_beam\_configuration module models SKA LOW SB entities. The contents of the module are presented in the diagram below.

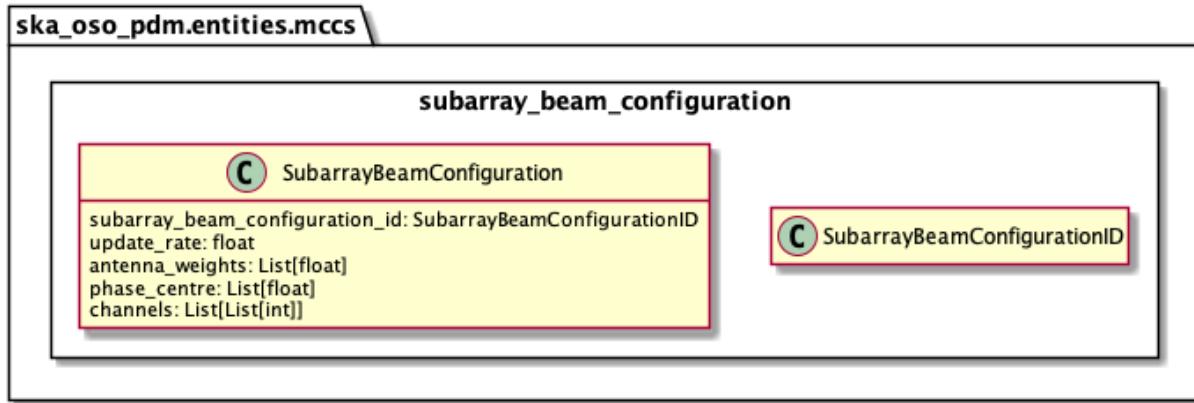


Fig. 1: Class diagram for the subarray\_beam\_configuration module

An example serialisation of this model to JSON is shown below.

```
# JSON modelled specifically by subarray_beam_configuration
...
"subarray_beam_configuration": {
    "subarray_beam_configuration_id": "Beam A config 1",
    "subarray_beam_id": "Beam A",
    "update_rate": 0.0,
    "antenna_weights": [1.0, 1.0, 1.0],
    "phase_centre": [0.0, 0.0],
    "channels": [
        [0, 8, 1, 1],
        [8, 8, 2, 1],
        [24, 16, 2, 1]
    ]
}
```

(continues on next page)

(continued from previous page)

```
    ]  
},  
...  
}
```

The entities.subarray\_beam\_configuration module defines simple Python representation of how SKA Low subarray beam in sub-array should be configured.

```
class SubarrayBeamConfiguration(subarray_beam_configuration_id: str, subarray_beam_id: str,  
                                update_rate: float, antenna_weights: List[float], phase_centre:  
                                List[float], channels: List[List[int]])
```

SubarrayBeamConfiguration specifies how SKA LOW sub-array should be configured.

```
SubarrayBeamConfigurationID
```

alias of builtins.str

# CHAPTER 16

## ska\_oso\_pdm.entities.low.target\_beam\_configuration

The target\_beam\_configuration module defines which SKA LOW target will be mapped to the subarray beam configurations.

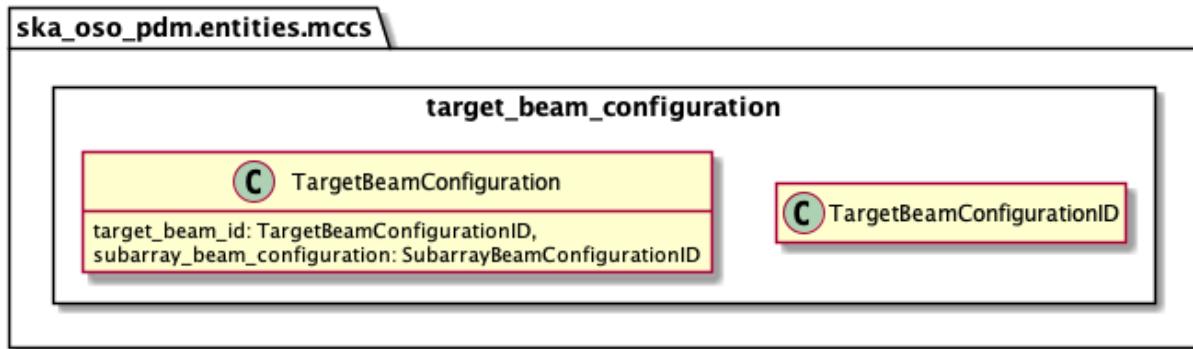


Fig. 1: Class diagram for the target\_beam\_configuration module

An example serialisation of this model to JSON is shown below.

```
# JSON modelled specifically by target_beam_configuration
...
"target_beam_configurations": [
    {
        "target_beam_id": "science target beam",
        "target": "my science target",
        "subarray_beam_configuration": "subarray beam 1"
    }
],
```

The entities.target\_beam\_configuration module defines simple Python representation of how SKA Low subarray beam in sub-array should be configured.

```
class TargetBeamConfiguration(target_beam_id: str, target: str, subarray_beam_configuration:  
                                str)
```

TargetBeamConfiguration specifies how SKA LOW subarray beam in a sub-array should be configured.

**TargetBeamConfigurationID**

alias of builtins.str

# CHAPTER 17

---

## ska\_oso\_pdm.schemas.codec

---

The codec module contains classes used by clients to marshall PDM classes to and from JSON. This saves the clients having to instantiate and manipulate the Marshmallow schema directly.

### **class** `MarshmallowCodec`

MarshmallowCodec marshalls and unmarshalls PDM classes.

The mapping of PDM classes to Marshmallow schema is defined in this class.

#### **dumps** (*obj*)

Return a string JSON representation of a PDM instance.

**Parameters** `obj` – the instance to marshall to JSON

**Returns** a JSON string

#### **load\_from\_file** (*cls, path*)

Load an instance of a PDM class from disk.

**Parameters**

- `cls` – the class to create from the file
- `path` – the path to the file

**Returns** an instance of `cls`

#### **loads** (*pdm\_class, json\_data*)

Create an instance of a PDM class from a JSON string.

**Parameters**

- `pdm_class` – the class to create from the JSON
- `json_data` – the JSON to unmarshall

**Returns** an instance of `cls`

#### **register\_mapping** (*pdm\_class*)

A decorator that is used to register the mapping between a Marshmallow schema and the PDM class it serialises.

**Parameters** `pdm_class` – the PDM class this schema maps to  
`set_schema(pdm_class, schema_class)`  
Set the schema for a PDM class.

**Parameters**

- `schema_class` – Marshmallow schema to map
- `pdm_class` – PDM class the schema maps to

# CHAPTER 18

---

## ska\_oso\_pdm.schemas.shared

---

The schemas module defines Marshmallow schemas that are shared by various other serialisation schemas.

**class UpperCasedField(\*args, \*\*kwargs)**

Field that serializes to an upper-case string and deserializes to a lower-case string.

**class NestedDict(nested, key, \*args, \*\*kwargs)**

Field that serialises a list to a dict, with the specified attribute acting as key.



# CHAPTER 19

---

ska\_oso\_pdm.schemas.common

---



# CHAPTER 20

---

## ska\_oso\_pdm.schemas.common.field\_configuration

---

The schemas.common.field\_configuration defines Marshmallow schema that map the field\_configurations section of an SKA scheduling block to/from a JSON representation.

```
class FieldConfigurationSchema (*args, **kwargs)
    The Field Configuration section of an SKA scheduling block
    make_fieldconfiguration (data, **_)
        Convert parsed JSON back into a FieldConfiguration object.
```

### Parameters

- **data** – dict containing parsed JSON values
- **\_** – kwargs passed by Marshmallow

**Returns** FieldConfiguration instance populated to match JSON



# CHAPTER 21

---

## ska\_oso\_pdm.schemas.common.procedures

---

The schemas.common.procedures defines Marshmallow schema that map the activities section of an SKA scheduling block to/from a JSON representation.

```
class EmbeddedScriptSchema (*args, **kwargs)
```

Schema for an EmbeddedScript, used in the activities section of an SKA scheduling block

```
make_embeddedscript (data, **_)
```

Convert parsed JSON back into a EmbeddedScript object.

```
class FileSystemScriptSchema (*args, **kwargs)
```

Schema for a FileSystemScript, used in the activities section of an SKA scheduling block

```
make_filesystemscript (data, **_)
```

Convert parsed JSON back into a FileSystemScript object.

```
class GitScriptSchema (*args, **kwargs)
```

Schema for a GitScript, used in the activities section of an SKA scheduling block

```
filter_nulls (data, **_)
```

Filter out null values from JSON.

### Parameters

- **data** – Marshmallow-provided dict containing parsed object values

- **\_** – kwargs passed by Marshmallow

**Returns** dict suitable for PB configuration

```
make_gitscript (data, **_)
```

Convert parsed JSON back into a GitScript object.

```
class PythonArgumentsSchema (*args, **kwargs)
```

Schema for the PythonArguments, used in the activities section of an SKA scheduling block

```
make_pythonarguments (data, **_)
```

Convert parsed JSON back into a PythonArguments object.

```
class PythonProcedureSchema(*args, **kwargs)
```

Schema for an abstract PythonProcedure, used in the activities section of anSKA scheduling block

# CHAPTER 22

---

## ska\_oso\_pdm.schemas.common.sb\_definition

---

The schemas.scheduling\_block\_schema defines a Marshmallow schema that maps the scan definition section of an SKA scheduling block to/from a JSON representation.

**class MetaDataSchema (\*args, \*\*kwargs)**  
The MetaData section of an SKA scheduling block

**create\_metadata (data, \*\*\_)**  
Convert parsed JSON back into a metadata

### Parameters

- **data** – dict containing parsed JSON values
- **\_** – kwargs passed by Marshmallow

**Returns** SBDefinition instance populated to match JSON

**filter\_nulls (data, \*\*\_)**  
Filter out null values from JSON.

### Parameters

- **data** – Marshmallow-provided dict containing parsed object values
- **\_** – kwargs passed by Marshmallow

**Returns** dict suitable for metadata

**class SBDefinitionSchema (\*args, \*\*kwargs)**  
SKA scheduling block

**create\_scheduling\_block (data, \*\*\_)**  
Convert parsed JSON back into a ScanRequest

### Parameters

- **data** – dict containing parsed JSON values
- **\_** – kwargs passed by Marshmallow

**Returns** SBDefinition instance populated to match JSON

**filter\_nulls**(*data*, \*\**\_*)

Filter out null values from JSON.

**Parameters**

- **data** – Marshmallow-provided dict containing parsed object values
- *\_* – kwargs passed by Marshmallow

**Returns** dict suitable for scan definition

# CHAPTER 23

---

## ska\_oso\_pdm.schemas.common.scan\_definition

---

The schemas.scan\_definition\_schema defines a Marshmallow schema that maps The scan definition section of an SKA scheduling block to/from a JSON representation.

```
class ScanDefinitionSchema(*args, **kwargs)
    The scan definition section of an SKA scheduling block
    create_scan_definition(data, **_)
        Convert parsed JSON back into a ScanDefinition
```

### Parameters

- **data** – dict containing parsed JSON values
- **\_** – kwargs passed by Marshmallow

**Returns** ScanDefinitions instance populated to match JSON

```
filter_nulls(data, **_)
    Filter out null values from JSON.
```

### Parameters

- **data** – Marshmallow-provided dict containing parsed object values
- **\_** – kwargs passed by Marshmallow

**Returns** dict suitable for scan definition



# CHAPTER 24

---

## ska\_oso\_pdm.schemas.csp.common

---

The schemas.csp\_schema defines Marshmallow schemas that map the CSP definition section of an SKA scheduling block to/from JSON.

```
class CSPConfigurationSchema (*args, **kwargs)
    Marshmallow schema for the ska_oso_pdm.CSPConfiguration class

    create (data, **_)
        Convert parsed JSON back into a CSPConfiguration object.
```

### Parameters

- **data** – dict containing parsed JSON values
- **\_** – kwargs passed by Marshmallow

**Returns** CSPConfiguration instance populated to match JSON

```
filter_nulls (data, **_)
    Filter out null values from JSON.
```

### Parameters

- **data** – Marshmallow-provided dict containing parsed object values
- **\_** – kwargs passed by Marshmallow

**Returns** dict suitable for SubArrayNode configuration

```
class FSPConfigurationSchema (*args, **kwargs)
    Marshmallow schema for the FSPConfiguration

    create (data, **_)
        Convert parsed JSON back into a FSPConfiguration object.
```

### Parameters

- **data** – dict containing parsed JSON values
- **\_** – kwargs passed by Marshmallow

**Returns** FSPConfiguration instance populated to match JSON

```
filter_nulls(data, **_)
```

Filter out null values from JSON.

#### Parameters

- **data** – Marshmallow-provided dict containing parsed object values
- **\_** – kwargs passed by Marshmallow

**Returns** dict suitable for FSP configuration

```
class SubarrayConfigurationSchema(*args, **kwargs)
```

Marshmallow schema for the SubarrayConfigurationSchema

```
create(data, **_)
```

Convert parsed JSON back into a SubarrayConfiguration object.

#### Parameters

- **data** – dict containing parsed JSON values
- **\_** – kwargs passed by Marshmallow

**Returns** SubarrayConfiguration instance populated to match JSON

**Return type** *SubarrayConfiguration*

```
class CommonConfigurationSchema(*args, **kwargs)
```

Marshmallow schema for the CommonConfigurationSchema

```
create(data, **_)
```

Convert parsed JSON back into a CSPConfiguration object.

#### Parameters

- **data** – dict containing parsed JSON values
- **\_** – kwargs passed by Marshmallow

**Returns** CommonConfiguration instance populated to match JSON

```
filter_nulls(data, **_)
```

Filter out null values from JSON.

#### Parameters

- **data** – Marshmallow-provided dict containing parsed object values
- **\_** – kwargs passed by Marshmallow

**Returns** dict suitable for FSP configuration

```
class CBFConfigurationSchema(*args, **kwargs)
```

Marshmallow schema for the CBFConfigurationSchema

```
create(data, **_)
```

Convert parsed JSON back into a CBFConfiguration object.

#### Parameters

- **data** – dict containing parsed JSON values
- **\_** – kwargs passed by Marshmallow

**Returns** CBFConfiguration instance populated to match JSON

**Return type** *CBFConfiguration*



# CHAPTER 25

---

## ska\_oso\_pdm.schemas.sdp

---

The schemas.sdp.sdp\_configuration module defines Marshmallow schemas .

```
class SDPConfigurationSchema(*args, **kwargs)
    Marshmallow class for the SDPConfiguration class

    create_sdp_config(data, **_)
        Convert parsed JSON back into a SDPConfiguration object.
```

### Parameters

- **data** – Marshmallow-provided dict containing parsed JSON values
- **\_** – kwargs passed by Marshmallow

**Returns** SDPConfiguration object populated from data

The schemas.sdp.scan\_type module defines Marshmallow schemas .

```
class ChannelSchema(*args, **kwargs)
    Marshmallow schema for the Channel class.

    create_channel(data, **_)
        Convert parsed JSON back into a Channel object.
```

### Parameters

- **data** – Marshmallow-provided dict containing parsed JSON values
- **\_** – kwargs passed by Marshmallow

**Returns** SubBand object populated from data

```
class ScanTypeSchema(*args, **kwargs)
    Marshmallow schema for the ScanType class.

    create_scan_type(data, **_)
        Convert parsed JSON back into a ScanType object.
```

### Parameters

- **data** – Marshmallow-provided dict containing parsed JSON values

- `_` – kwargs passed by Marshmallow

**Returns** ScanType object populated from data

The schemas.sdp.processing\_block module defines Marshmallow schemas .

**class WorkflowSchema(\*args, \*\*kwargs)**

Represents the type of workflow being configured on the SDP

**create\_sdp\_wf(data, \*\*\_)**

Convert parsed JSON back into a Workflow object.

**Parameters**

- `data` – Marshmallow-provided dict containing parsed JSON values
- `_` – kwargs passed by Marshmallow

**Returns** SDP Workflow object populated from data

**class PbDependencySchema(\*args, \*\*kwargs)**

Marshmallow schema for the PbDependency class.

**create\_pb\_dependency(data, \*\*\_)**

Convert parsed JSON back into a PbDependency object.

**Parameters**

- `data` – Marshmallow-provided dict containing parsed JSON values
- `_` – kwargs passed by Marshmallow

**Returns** PbDependency object populated from data

**class ProcessingBlockSchema(\*args, \*\*kwargs)**

Marshmallow schema for the ProcessingBlock class.

**create\_processing\_block(data, \*\*\_)**

Convert parsed JSON back into a PB object.

**Parameters**

- `data` – Marshmallow-provided dict containing parsed JSON values
- `_` – kwargs passed by Marshmallow

**Returns** PB object populated from data

**filter\_nulls(data, \*\*\_)**

Filter out null values from JSON.

**Parameters**

- `data` – Marshmallow-provided dict containing parsed object values
- `_` – kwargs passed by Marshmallow

**Returns** dict suitable for PB configuration

# CHAPTER 26

---

## ska\_oso\_pdm.schemas.dish.dish\_allocation

---

The schemas.dish\_allocation module defines Marshmallow schemas that map TMC Central Node message classes to/from a JSON representation.

**class DishAllocationSchema(\*args, \*\*kwargs)**

Marshmallow schema for the DishAllocation class.

**create(data, \*\*\_)**

Convert parsed JSON back into a DishAllocation object.

### Parameters

- **data** – Marshmallow-provided dict containing parsed JSON values
- **\_** – kwargs passed by Marshmallow

**Returns** DishAllocation object populated from data



# CHAPTER 27

---

## ska\_oso\_pdm.schemas.dish.dish\_configuration

---

The schemas.dish\_configuration\_schema defines a Marshmallow schema that maps SKA MID dishes to/from a JSON representation.

```
class DishConfigurationSchema(*args, **kwargs)
    The dish configuration schema section of an SKA scheduling block
    create_scan_definition(data, **_)
        Convert parsed JSON back into a DishConfiguration
```

### Parameters

- **data** – dict containing parsed JSON values
- **\_** – kwargs passed by Marshmallow

**Returns** DishConfiguration instance populated to match JSON



# CHAPTER 28

---

## ska\_oso\_pdm.schemas.mccs.mccs\_allocation

---

The schemas.mccs\_allocation module defines Marshmallow schemas that map TMC Central Node message classes to/from a JSON representation.

```
class MCCSAllocationSchema(*args, **kwargs)
    Marshmallow schema for the MCCSAllocation class.

    create_mccs_allocate(data, **_)
        Convert parsed JSON back into a MCCSAllocation object.
```

### Parameters

- **data** – Marshmallow-provided dict containing parsed JSON values
- **\_** – kwargs passed by Marshmallow

**Returns** MCCSAllocation object populated from data



# CHAPTER 29

---

## ska\_oso\_pdm.schemas.mccs.subarray\_beam\_configuration

---

The schemas.subarray\_beam\_configuration defines a Marshmallow schema that maps SKA LOW subarray beams, target to/from a JSON representation.

**class SubarrayBeamConfigurationSchema (\*args, \*\*kwargs)**

The MCCS subarray beam configuration schema section of an SKA scheduling block.

**create\_subarray\_beam (data, \*\*\_)**

Convert parsed JSON back into a SubarrayBeamConfiguration

### Parameters

- **data** – dict containing parsed JSON values
- **\_** – kwargs passed by Marshmallow

**Returns** SubarrayBeamConfiguration instance populated to match JSON



# CHAPTER 30

---

## ska\_oso\_pdm.schemas.mccs.target\_beam\_configuration

---

The schemas.target\_beam\_configuration defines a Marshmallow schema that maps SKA LOW subarray beams, target to/from a JSON representation.

**class TargetBeamConfigurationSchema(\*args, \*\*kwargs)**

The Target beam configuration schema section of an SKA scheduling block

**create\_target\_beam(data, \*\*\_)**

Convert parsed JSON back into a TargetBeamConfiguration

### Parameters

- **data** – dict containing parsed JSON values
- **\_** – kwargs passed by Marshmallow

**Returns** TargetBeamConfiguration instance populated to match JSON



# CHAPTER 31

---

## Project description

---

The SKA Project Data Model (PDM) is the data model used for ‘offline’ observatory processes. PDM entities such as observing proposals, observing programmes, scheduling blocks, etc., capture all the information required to describe and grade an observing proposal and any associated scheduling blocks. ska-oso-pdm is a Python object model and JSON serialisation library for the PDM.

### 31.1 Status

The SB definition evolves from PI to PI as more elements are added to the system and greater element configuration space is exposed. Practically speaking, this library should be considered the best reference for the current state of SB design.

For examples of SBs, see the [MID JSON representation](#) and [LOW JSON representation](#).

Historical references can be found here:

- [PI3 MID SB](#)
- [PI6 MID SB](#)
- [PI10 LOW SB](#)
- [PI11 MID SB](#)
- [PI11 LOW SB](#)



# CHAPTER 32

---

## Indices and tables

---

- genindex
- modindex
- search



---

## Python Module Index

---

**S**

ska\_oso\_pdm.schemas.dish.dish\_configuration,  
ska\_oso\_pdm.entities.common, 19 77  
ska\_oso\_pdm.entities.common.field\_configuration, 22 79  
ska\_oso\_pdm.entities.common.procedures, 27 81  
ska\_oso\_pdm.entities.common.sb\_definition, 31 83  
ska\_oso\_pdm.entities.common.scan\_definition, 34 74  
ska\_oso\_pdm.entities.csp.common, 36 73  
ska\_oso\_pdm.entities.dish.dish\_allocation, 45 73  
ska\_oso\_pdm.entities.dish.dish\_configuration, 48 57  
ska\_oso\_pdm.entities.mccs.mccs\_allocation, 50  
ska\_oso\_pdm.entities.mccs.subarray\_beam\_configuration, 52  
ska\_oso\_pdm.entities.mccs.target\_beam\_configuration, 53  
ska\_oso\_pdm.entities.sdp.processing\_block, 43  
ska\_oso\_pdm.entities.sdp.scan\_type, 43  
ska\_oso\_pdm.entities.sdp.sdp\_configuration, 43  
ska\_oso\_pdm.schemas.codec, 55  
ska\_oso\_pdm.schemas.common, 59  
ska\_oso\_pdm.schemas.common.field\_configuration, 61  
ska\_oso\_pdm.schemas.common.procedures, 63  
ska\_oso\_pdm.schemas.common.sb\_definition, 65  
ska\_oso\_pdm.schemas.common.scan\_definition, 67  
ska\_oso\_pdm.schemas.csp.common, 69  
ska\_oso\_pdm.schemas.dish.dish\_allocation, 75



---

## Index

---

### C

CBFConfiguration (class *ska\_oso\_pdm.entities.csp.common*), 36  
CBFConfigurationSchema (class *ska\_oso\_pdm.schemas.csp.common*), 70  
Channel (class in *ska\_oso\_pdm.entities.sdp.scan\_type*), 43  
ChannelSchema (class *ska\_oso\_pdm.schemas.sdp.scan\_type*), 73  
CommonConfiguration (class *ska\_oso\_pdm.entities.csp.common*), 37  
CommonConfigurationSchema (class *ska\_oso\_pdm.schemas.csp.common*), 70  
coord (*DriftScanTarget* attribute), 23  
coord (*Planet* attribute), 23  
coord (*SiderealTarget* attribute), 22  
create() (CBFConfigurationSchema method), 70  
create() (CommonConfigurationSchema method), 70  
create() (CSPConfigurationSchema method), 69  
create() (DishAllocationSchema method), 75  
create() (FSPCConfigurationSchema method), 69  
create() (SubarrayConfigurationSchema method), 70  
create\_channel() (ChannelSchema method), 73  
create\_mcbs\_allocate() (MCBSAllocation-  
Schema method), 79  
create\_metadata() (MetaDataSchema method), 65  
create\_pb\_dependency() (PbDependencySchema  
method), 74  
create\_processing\_block() (Processing-  
BlockSchema method), 74  
create\_scan\_definition() (DishConfigura-  
tionSchema method), 77  
create\_scan\_definition() (ScanDefinition-  
Schema method), 67  
create\_scan\_type() (ScanTypeSchema method),  
73  
create\_scheduling\_block() (SBDefinition-  
Schema method), 65  
create\_sdp\_config() (SDPConfigurationSchema

method), 73  
in create\_sdp\_wf() (WorkflowSchema method), 74  
create\_subarray\_beam() (SubarrayBeamConfig-  
urationSchema method), 81  
create\_target\_beam() (TargetBeamConfigura-  
tionSchema method), 83  
CSPConfiguration (class in  
*ska\_oso\_pdm.entities.csp.common*), 36  
CSPConfigurationID (in module  
*ska\_oso\_pdm.entities.csp.common*), 36  
CSPConfigurationSchema (class in  
*ska\_oso\_pdm.schemas.csp.common*), 69

### D

DishAllocation (class in  
*ska\_oso\_pdm.entities.dish.dish\_allocation*), 45  
DishAllocationSchema (class in  
*ska\_oso\_pdm.schemas.dish.dish\_allocation*),  
75  
DishConfiguration (class in  
*ska\_oso\_pdm.entities.dish.dish\_configuration*),  
48  
DishConfigurationID (in module  
*ska\_oso\_pdm.entities.dish.dish\_configuration*),  
48  
DishConfigurationSchema (class in  
*ska\_oso\_pdm.schemas.dish.dish\_configuration*),  
77  
DriftScanTarget (class in  
*ska\_oso\_pdm.entities.common.field\_configuration*),  
23  
dumps() (MarshmallowCodec method), 55

### E

EmbeddedScript (class in  
*ska\_oso\_pdm.entities.common.procedures*),  
27  
EmbeddedScriptSchema (class in  
*ska\_oso\_pdm.schemas.common.procedures*),  
63

**F**

- FieldConfiguration (class in *ska\_oso\_pdm.entities.common.field\_configuration*), 22
- FieldConfigurationID (in module *ska\_oso\_pdm.entities.common.field\_configuration*), 22
- FieldConfigurationSchema (class in *ska\_oso\_pdm.schemas.common.field\_configuration*), 61
- FileSystemScript (class in *ska\_oso\_pdm.entities.common.procedures*), 27
- FileSystemScriptSchema (class in *ska\_oso\_pdm.schemas.common.procedures*), 63
- filter\_nulls() (*CommonConfigurationSchema method*), 70
- filter\_nulls() (*CSPConfigurationSchema method*), 69
- filter\_nulls() (*FSPConfigurationSchema method*), 70
- filter\_nulls() (*GitScriptSchema method*), 63
- filter\_nulls() (*MetaDataSetSchema method*), 65
- filter\_nulls() (*ProcessingBlockSchema method*), 74
- filter\_nulls() (*SBDefinitionSchema method*), 66
- filter\_nulls() (*ScanDefinitionSchema method*), 67
- FSPConfiguration (class in *ska\_oso\_pdm.entities.csp.common*), 36
- FSPConfigurationSchema (class in *ska\_oso\_pdm.schemas.csp.common*), 69
- FSPFunctionMode (class in *ska\_oso\_pdm.entities.csp.common*), 36

**G**

- GitScript (class in *ska\_oso\_pdm.entities.common.procedures*), 27
- GitScriptSchema (class in *ska\_oso\_pdm.schemas.common.procedures*), 63

**L**

- load\_from\_file() (*MarshmallowCodec method*), 55
- loads() (*MarshmallowCodec method*), 55

**M**

- make\_embeddedscript() (*EmbeddedScriptSchema method*), 63
- make\_fieldconfiguration() (*FieldConfigurationSchema method*), 61

make\_filesystemscript() (*FileSystemScriptSchema method*), 63

make\_gitscript() (*GitScriptSchema method*), 63

make\_pythonarguments() (*PythonArgumentsSchema method*), 63

MarshmallowCodec (class in *ska\_oso\_pdm.schemas.codec*), 55

MCCSAllocation (class in *ska\_oso\_pdm.entities.mccs.mccs\_allocation*), 50

MCCSAllocationSchema (class in *ska\_oso\_pdm.schemas.mccs.mccs\_allocation*), 79

MetaData (class in *ska\_oso\_pdm.entities.common.sb\_definition*), 31

MetaDataSchema (class in *ska\_oso\_pdm.schemas.common.sb\_definition*), 65

**N**

- NestedDict (class in *ska\_oso\_pdm.schemas.shared*), 57

**P**

- PbDependency (class in *ska\_oso\_pdm.entities.sdp.processing\_block*), 43
- PbDependencySchema (class in *ska\_oso\_pdm.schemas.sdp.processing\_block*), 74
- in Planet (class in *ska\_oso\_pdm.entities.common.field\_configuration*), 23
- in PlanetName (class in *ska\_oso\_pdm.entities.common.field\_configuration*), 23
- ProcessingBlock (class in *ska\_oso\_pdm.entities.sdp.processing\_block*), 43
- ProcessingBlockSchema (class in *ska\_oso\_pdm.schemas.sdp.processing\_block*), 74
- PythonArgumentsSchema (class in *ska\_oso\_pdm.schemas.common.procedures*), 63
- PythonProcedureSchema (class in *ska\_oso\_pdm.schemas.common.procedures*), 63

**R**

- ReceiverBand (class in *ska\_oso\_pdm.entities.dish.dish\_configuration*), 48
- register\_mapping() (*MarshmallowCodec method*), 55

**S**

SBDefinition (class in *ska\_oso\_pdm.entities.common.sb\_definition*), 31  
 SBDefinitionSchema (class in *ska\_oso\_pdm.schemas.common.sb\_definition*), 65  
 ScanDefinition (class in *ska\_oso\_pdm.entities.common.scan\_definition*), 34  
 ScanDefinitionID (in module *ska\_oso\_pdm.entities.common.scan\_definition*), 34  
 ScanDefinitionSchema (class in *ska\_oso\_pdm.schemas.common.scan\_definition*), 67  
 ScanType (class in *ska\_oso\_pdm.entities.sdp.scan\_type*), 43  
 ScanTypeID (in module *ska\_oso\_pdm.entities.sdp.scan\_type*), 43  
 ScanTypeSchema (class in *ska\_oso\_pdm.schemas.sdp.scan\_type*), 73  
 SDPConfiguration (class in *ska\_oso\_pdm.entities.sdp.sdp\_configuration*), 43  
 SDPConfigurationSchema (class in *ska\_oso\_pdm.schemas.sdp.sdp\_configuration*), 73  
 set\_schema() (MarshmallowCodec method), 56  
 SiderealTarget (class in *ska\_oso\_pdm.entities.common.field\_definition*), 22  
*ska\_oso\_pdm.entities.common* (module), 19  
*ska\_oso\_pdm.entities.common.field\_definition* (module), 22  
*ska\_oso\_pdm.entities.common.procedures* (module), 27  
*ska\_oso\_pdm.entities.common\_sb\_definition* (module), 31  
*ska\_oso\_pdm.entities.common.scan\_definition* (module), 34  
*ska\_oso\_pdm.entities.csp.common* (module), 36  
*ska\_oso\_pdm.entities.dish.dish\_allocation* (module), 45  
*ska\_oso\_pdm.entities.dish.dish\_configuration* (module), 48  
*ska\_oso\_pdm.entities.mccs.mccs\_allocation* (module), 50  
*ska\_oso\_pdm.entities.mccs.subarray\_beam\_configuration* (module), 52  
*ska\_oso\_pdm.entities.mccs.target\_beam\_configuration* (module), 53  
*ska\_oso\_pdm.entities.sdp.processing\_block*  
 (module), 43  
*ska\_oso\_pdm.entities.sdp.scan\_type* (module), 43  
*ska\_oso\_pdm.entities.sdp.sdp\_configuration* (module), 43  
*ska\_oso\_pdm.schemas.codec* (module), 55  
*ska\_oso\_pdm.schemas.common* (module), 59  
*ska\_oso\_pdm.schemas.common.field\_definition* (module), 61  
*ska\_oso\_pdm.schemas.common.procedures* (module), 63  
*ska\_oso\_pdm.schemas.common\_sb\_definition* (module), 65  
*ska\_oso\_pdm.schemas.common.scan\_definition* (module), 67  
*ska\_oso\_pdm.schemas.csp.common* (module), 69  
*ska\_oso\_pdm.schemas.dish.dish\_allocation* (module), 75  
*ska\_oso\_pdm.schemas.dish.dish\_configuration* (module), 77  
*ska\_oso\_pdm.schemas.mccs.mccs\_allocation* (module), 79  
*ska\_oso\_pdm.schemas.mccs.subarray\_beam\_configuration* (module), 81  
*ska\_oso\_pdm.schemas.mccs.target\_beam\_configuration* (module), 83  
*ska\_oso\_pdm.schemas.sdp.processing\_block* (module), 74  
*ska\_oso\_pdm.schemas.sdp.scan\_type* (module), 73  
*ska\_oso\_pdm.schemas.sdp.sdp\_configuration* (module), 73  
*ska\_oso\_pdm.schemas.shared* (module), 57  
*SubarrayBeamConfiguration* (class in *ska\_oso\_pdm.entities.mccs.subarray\_beam\_configuration*), 52  
*SubarrayBeamConfigurationID* (in module *ska\_oso\_pdm.entities.mccs.subarray\_beam\_configuration*), 52  
*SubarrayBeamConfigurationSchema* (class in *ska\_oso\_pdm.schemas.mccs.subarray\_beam\_configuration*), 81  
*SubarrayBeamID* (in module *ska\_oso\_pdm.entities.mccs.mccs\_allocation*), 50  
*SubarrayConfiguration* (class in *ska\_oso\_pdm.entities.csp.common*), 37  
*SubarrayConfigurationSchema* (class in *ska\_oso\_pdm.schemas.csp.common*), 70  
*T*  
*TargetBeamConfiguration* (class in *ska\_oso\_pdm.entities.mccs.target\_beam\_configuration*),  
 93

53

TargetBeamConfigurationID (*in module*  
*ska\_oso\_pdm.entities.mccs.target\_beam\_configuration*),  
54

TargetBeamConfigurationSchema (*class in*  
*ska\_oso\_pdm.schemas.mccs.target\_beam\_configuration*),  
83

TargetID (*in module*  
*ska\_oso\_pdm.entities.common.field\_configuration*),  
23

TelescopeType (*class in*  
*ska\_oso\_pdm.entities.common.sb\_definition*),  
31

## U

UpperCasedField (*class in*  
*ska\_oso\_pdm.schemas.shared*), 57

## W

Workflow (*class in ska\_oso\_pdm.entities.sdp.processing\_block*),  
43

WorkflowSchema (*class in*  
*ska\_oso\_pdm.schemas.sdp.processing\_block*),  
74